


OWNBY  DESIGN

HERSH24<sup>k</sup>  
AZ LUXURY PROPERTIES

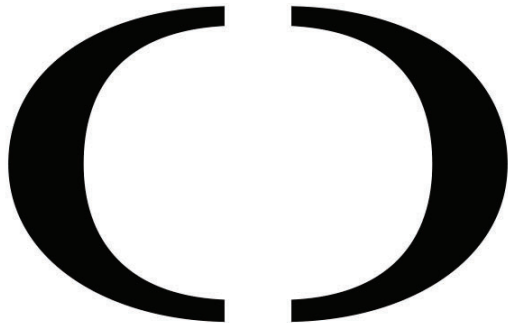

PALO CRISTI RESIDENCE

5815 N. PALO CRISTI RD, PARADISE VALLEY, AZ 85253

## PAGE INDEX:

### SPECIFICATIONS:

- S-1 ..... MATERIAL PALETTE
- S-2 ..... GENERAL INTERIOR CONCEPTS
- S-3 ..... DOORS / HARDWARE
- S-4 ..... MILLWORK STYLE
- S-5 ..... APPLIANCES
- S-6 ..... PLUMBING
- S-7 ..... LIGHTING

### PLANS:

- P-1 ..... FLOOR PLAN
- P-2 ..... FURNITURE PLAN
- P-3 ..... FLOORING PLAN
- P-4 ..... WALL FINISH PLAN
- P-5 ..... POWER PLAN
- P-6 ..... REFLECTIVE CEILING PLAN

### INTERIOR ELEVATIONS:

- 101 ..... KITCHEN
- 102 ..... PANTRY
- 103 ..... KEY DROP
- 104 ..... BAR
- 105 ..... FOYER/GREAT ROOM
- 106 ..... BONUS ROOM
- 107 ..... THEATER
- 108 ..... POWDER
- 109 ..... OFFICE
- 110 ..... BATH 1
- 111 ..... W.I.C 1
- 112 ..... BATH 2
- 113 ..... W.I.C 2
- 114 ..... BATH 3
- 115 ..... W.I.C 3
- 116 ..... LAUNDRY
- 117 ..... CASITA
- 118 ..... CASITA BATH
- 119 ..... BBQ
- 201 ..... MASTER BEDROOM
- 202 ..... MASTER BATH
- 203 ..... MASTER W.I.C
- 204 ..... VIEWING LOT

### DETAIL DRAWINGS:

- ID.1 ..... 3/4" REGLET RECESSED BASE
- ID.2 ..... 3/4" SHADOW LINE
- ID.3 ..... COUNTERTOP EDGE WITH MILLWORK REVEAL
- ID.4 ..... INTEGRAL RINCOMATIC FINGER PULL
- ID.5 ..... DOUBLE RINCOMATIC FINGER PULL
- ID.6 ..... LINEAR FINGER PULL
- ID.7 ..... DOUBLE LINEAR FINGER PULL
- ID.8 ..... INTEGRAL SLAB SINK
- ID.9 ..... LINEAR INFINITY DRAIN
- ID.10 ..... SHOWER NICHE WITH LIGHTING
- ID.11 ..... MASTER BATH SHOWER NICHE
- ID.12 ..... 4" SQUARE MITERED SLAB BENCH  
WITH LIGHTING
- ID.13 ..... UNDER SHELF LIGHTING
- ID.14 ..... WOOD SHELF WITH LIGHTING AND PLUG MOLD
- ID.15 ..... METAL SHELVING WITH LINEAR LIGHTING  
ABOVE AND BELOW
- ID.16 ..... VERTICAL LED LIGHTING
- ID.17 ..... TOE KICK LIGHTING
- ID.18 ..... UC LIGHTING AND PLUG MOLD
- ID.19 ..... UC LIGHTING AND NO PLUG MOLD
- ID.20 ..... KITCHEN RANGE HOOD
- ID.21 ..... POWDER MIRROR
- ID.22 ..... MIRROR FRAME FOR TWIGGY LIGHTS
- ID.23 ..... MASTER BATH - 1" BLACK METAL FRAME MIRROR
- ID.24 ..... KITCHEN ISLAND PLUG MOLD DETAIL
- ID.25 ..... FLOATING MILLWORK SUPPORT
- ID.26 ..... FLUSH WOOD TOP/MILLWORK
- ID.27 ..... WOOD REVEALS IN KITCHEN
- ID.28 ..... EXTENDED DOOR JAMB
- ID.29 ..... CUSTOM BARN DOOR HARDWARE
- ID.30 ..... TILED WINDOW SILL AT SECONDARY SHOWERS
- ID.31 ..... HEAT RETARDANT FIRE TRAY
- ID.32 ..... METAL FIREPLACE SURROUND
- ID.33 ..... TV MOUNTING BRACKET IN GREAT ROOM

## PALO CRISTI RESIDENCE

5815 N. PALO CRISTI RD, PARADISE VALLEY, AZ 85253




# PALO CRISTI RESIDENCE - RENDERINGS

5815 N. PALO CRISTI RD, PARADISE VALLEY, AZ 85253

OWNBY  DESIGN



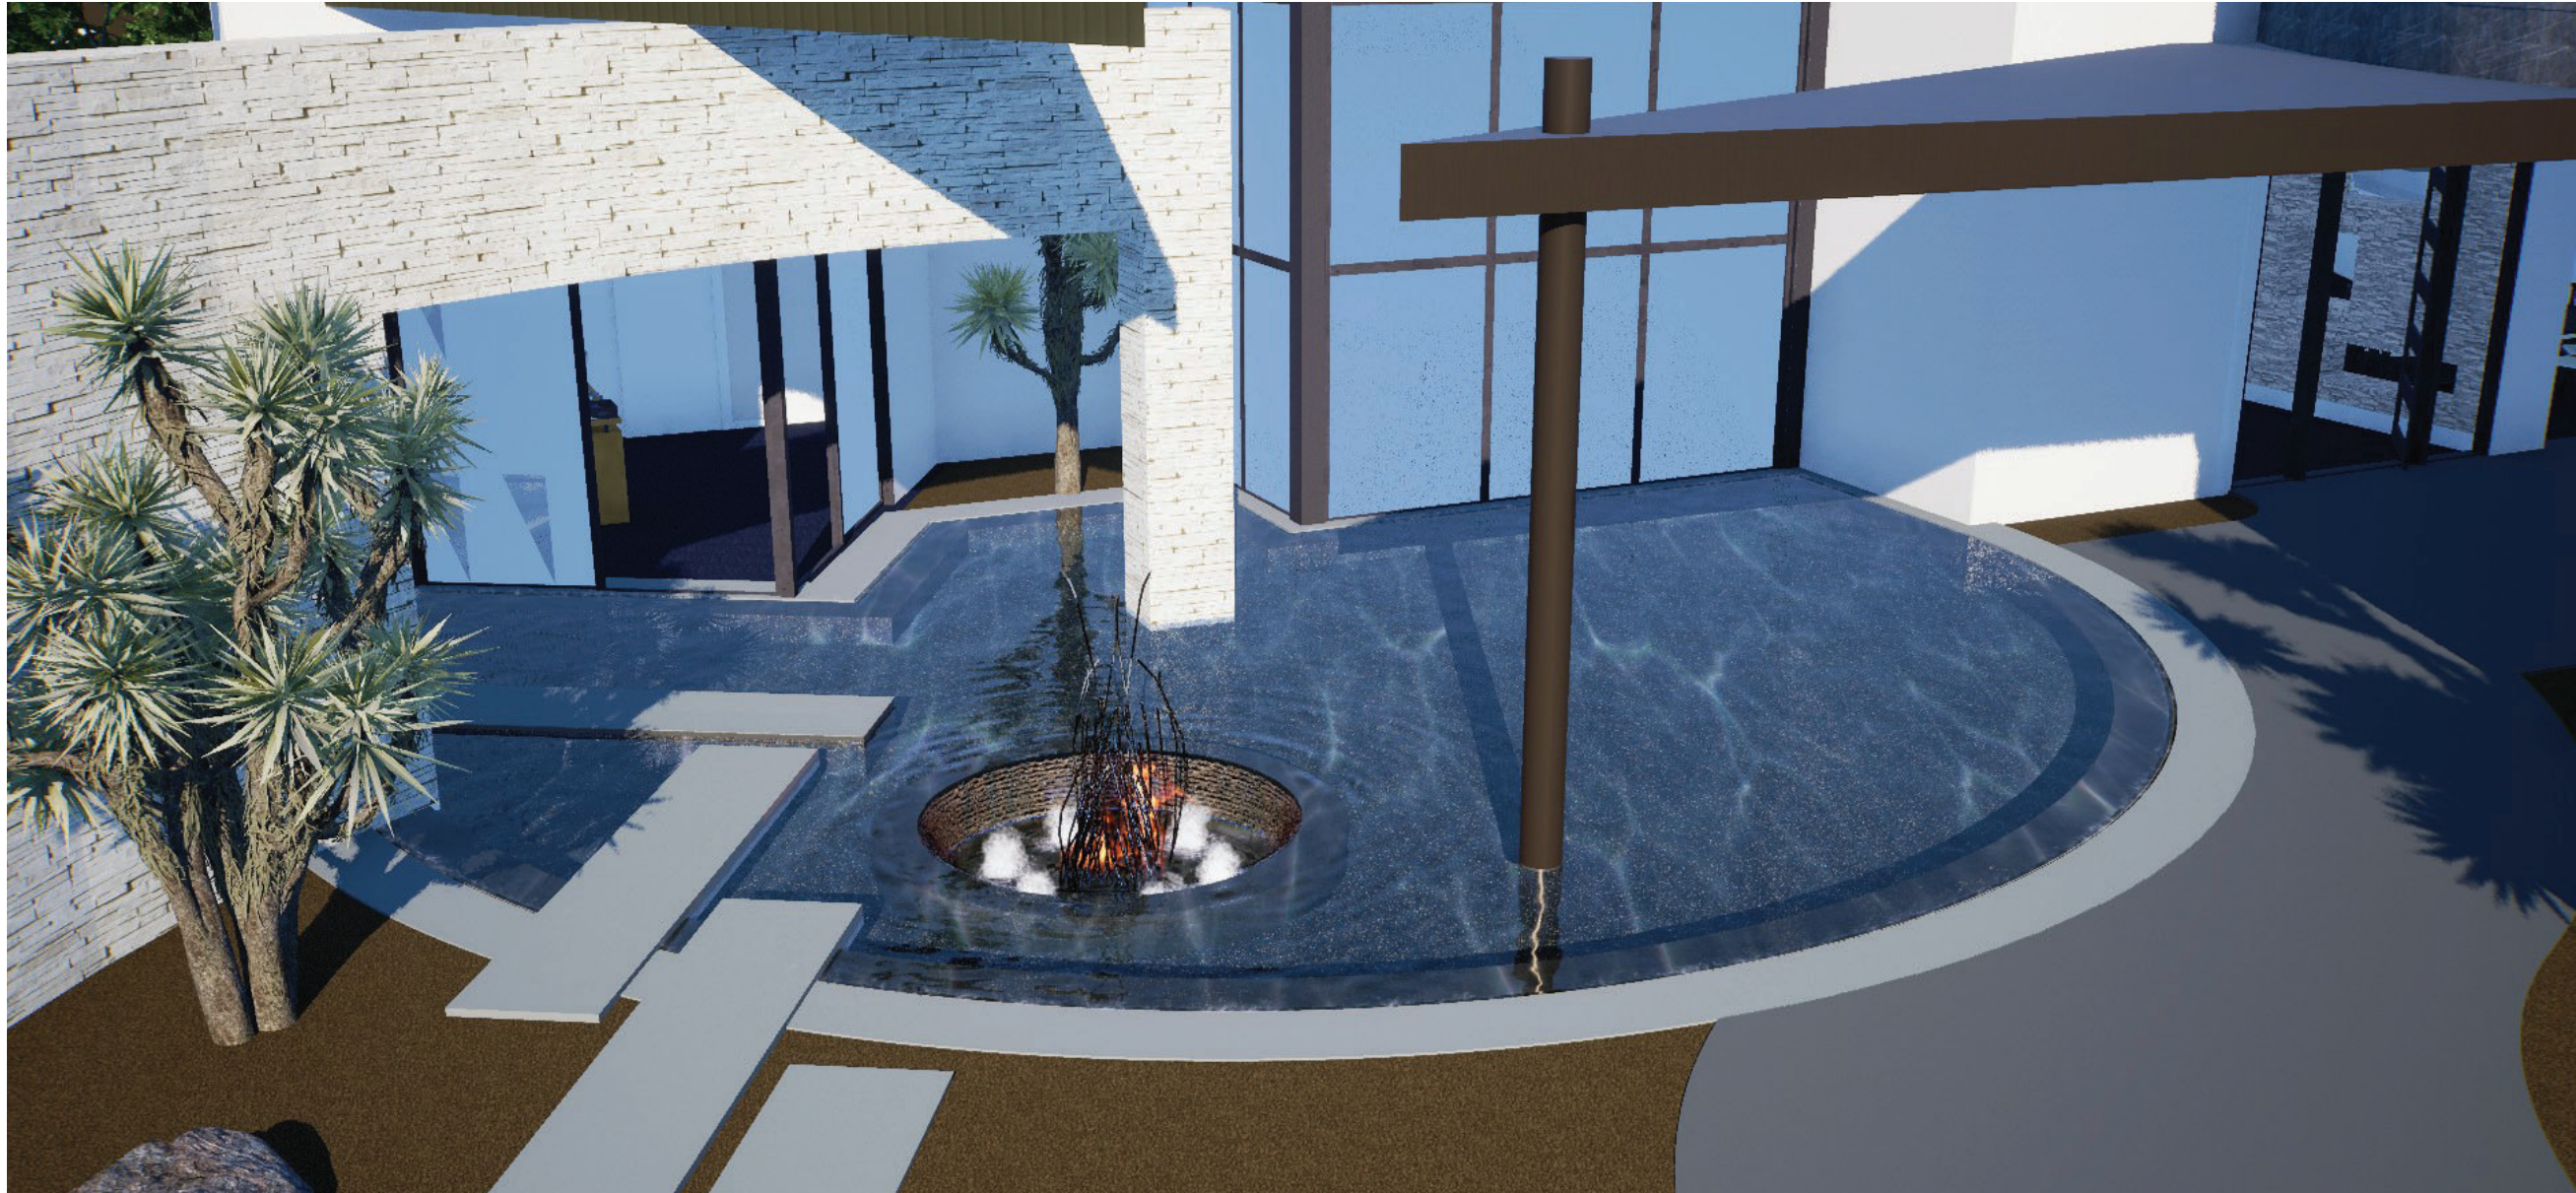

# PALO CRISTI RESIDENCE - RENDERINGS

5815 N. PALO CRISTI RD, PARADISE VALLEY, AZ 85253





# PALO CRISTI RESIDENCE - RENDERINGS

5815 N. PALO CRISTI RD, PARADISE VALLEY, AZ 85253





MAIN FLOOR TILE  
ERGON ELEGANCE PRO GREY




HOUSE STONE: SOLSTICE STONE  
PACIFIC BLUE SPLITFACE



WOOD FLOORING  
PROVENZA  
LUGANO COLLECTION  
FINISH: ORO



DARK METAL FASCIA &  
ACCENTS

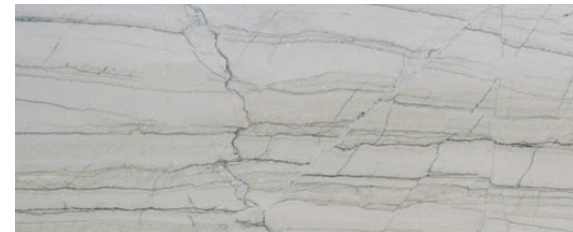

NATURAL QUARTZITE SLAB  
"CALACATTA BRASIL"




POLISHED QUARTZ SLAB  
"PIATRA GREY"




ACCENT HOUSE STONE  
SOLSTICE STONE  
PACIFIC BLUE COMBED



MILLWORK A: RIFT CUT WHITE OAK

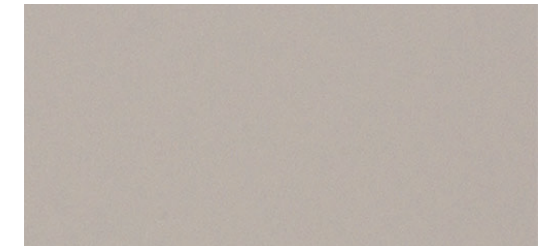

MILLWORK B: MIRLUX SUPER MATTE TAN

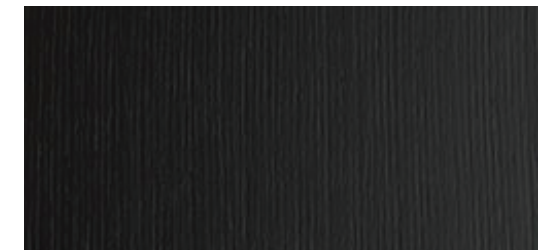

RIFT CUT WHITE OAK WITH BLACK STAIN



EXTERIOR CONCRETE PAVER  
ACKERSTONE PALAZZO 24X24  
PEWTER CONTEMPO

# PALO CRISTI RESIDENCE - MATERIAL PALETTE

5815 N. PALO CRISTI RD, PARADISE VALLEY, AZ 85253





INTERIOR HINGED DOORS  
DUMONT LEVER WITH STRETTO ROSETTE (2" X 10")  
FINISH : FLAT BLACK US19



BASE:  
3/4" REGLET RECESSED BASE, PAINTED  
TO MATCH WALLS



EMTEK  
2" CYLINDER FLOOR BUMPER  
FINISH: FLAT BLACK US19



BLACK STAINED RIFT OAK SLAB WOOD DOORS WITH EXTENDED FLY-BY JAMBS  
FIXED PANEL ABOVE 8' HINGED DOORS TO EXTEND TO LID;  
FIXED PANEL TO MATCH FINISH OF DOOR PANEL BELOW



ROLLING WALL CONCEPT  
FLAT SLAB-STYLE WITH  
CUSTOM VERTICAL INSET FINGER PULL WITH METAL  
BACK (MATTE BLACK FINISH)

# PALO CRISTI RESIDENCE - DOOR/HARDWARE

5815 N. PALO CRISTI RD, PARADISE VALLEY, AZ 85253



MILLWORK HARDWARE  
 INTEGRATED MILLWORK FINGER PULL  
 \*SEE ELEVATIONS FOR LOCATIONS



SHOWER DOOR HANDLE  
 KEYTIGER  
 MADISON TWO-SIDED  
 31.5" OVERALL LENGTH  
 KT3061-800-4010-03  
 FINISH : MATTE BLACK



GLASS DOOR HINGES  
 WALL MOUNT W/ SHORT BACK PLATE  
 DESIGNER SERIES HINGE  
 US HORIZON  
 HGTWMB  
 FINISH: MATTE BLACK





GLASS DOOR  
 PIVOT HINGES  
 CR LAWRENCE  
 SENIOR CARDIFF SERIES  
 FINISH: MATTE BLACK  
 (MASTER ONLY)




no machining

INTEGRAL MILLWORK HARDWARE  
 RINCOMATIC,  
 SYMA 32,  
 MATTE BLACK 52M



GLASS TO GLASS DOOR HINGE  
 DESIGNER SERIES HINGE  
 US HORIZON  
 H180GTGAC  
 FINISH: MATTE BLACK

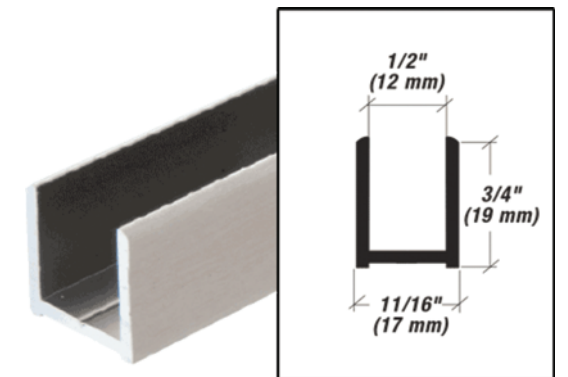

US HORIZON  
 METAL U-CHANNEL  
 (RECESSED FOR 1/2" FIXED GLASS PANELS)  
 AU-HP12-MB  
 FINISH: MATTE BLACK

# PALO CRISTI RESIDENCE - DOOR/HARDWARE

5815 N. PALO CRISTI RD, PARADISE VALLEY, AZ 85253






36" DESIGNER COLUMN  
REFRIGERATOR WITH INTERNAL  
DISPENSER - PANEL READY  
RIGHT HINGE  
DEC3650RID/R  
QTY: (1)



36" DESIGNER COLUMN FREEZER  
WITH ICE MAKER - PANEL READY  
LEFT HINGE  
DEC3650FI/L  
QTY: (1)



BEST RANGE HOOD  
CP571QT602SB  
60" STAINLESS HOOD LINER WITH I  
Q12 BLOWER, 1500MAX  
QTY:(1)

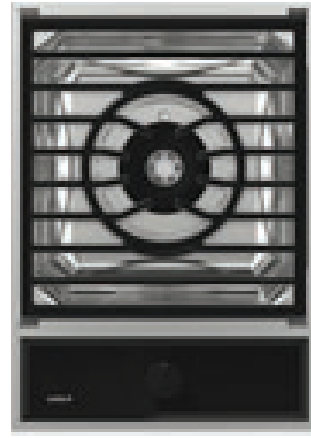

WOLF  
15" GAS MULTI-FUNCTION  
COOKTOP  
MM15TF/S  
(QTY :2)



WOLF  
15" GAS TRANSITIONAL  
COOKTOP  
CG152TF/S  
(QTY : 1)



WOLF  
15" TRANSITIONAL  
INDUCTION COOKTOP  
CI152TF/S  
(QTY : 1)



WOLF  
30" M SERIES CONTEMPORARY  
COFFEE SYSTEM  
EC3050CM/B  
QTY: (1)



WOLF  
30" M SERIES CONTEMPORARY CONVECTION STEAM OVEN  
CSO3050CM/B/T  
QTY: (1)



WOLF  
30" M SERIES CONTEMPORARY BUILT-IN  
SINGLE OVEN  
SO30CM/B  
QTY: (2)



WOLF  
30" M SERIES CONTEMPORARY SPEED OVEN  
SPO30CM/B/TH  
QTY: (1)



COVE  
24" DISHWASHER WITH WATER  
SOFTENER - PANEL READY  
DW2450WS  
QTY: (1)

# PALO CRISTI RESIDENCE - KITCHEN APPLIANCES

5815 N. PALO CRISTI RD, PARADISE VALLEY, AZ 85253



SUBZERO  
15" ICE MACHINE UNDER COUNTER  
UC-15IP  
QTY : (1)



SUBZERO  
30" DESIGNER WINE STORAGE WITH  
REFRIGERATOR DRAWERS - PANEL READY  
DET3050WR/L  
QTY : (1)




COVE  
24" DISHWASHER WITH WATER  
SOFTENER - PANEL READY  
DW2450WS  
QTY: (1)

## PALO CRISTI RESIDENCE - BAR APPLIANCES

5815 N. PALO CRISTI RD, PARADISE VALLEY, AZ 85253

S-5.2



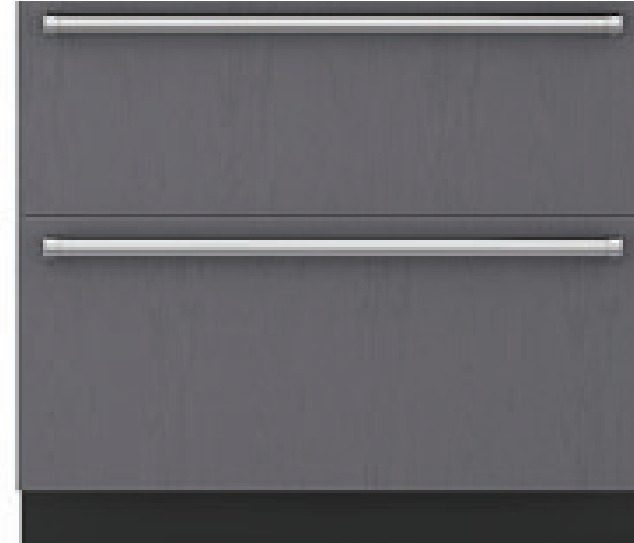

SUBZERO  
36" DESIGNER REFRIDGERATOR /  
FREEZER DRAWERS WITH ICE  
PANEL-READY  
ID-36CI  
(QTY: 1)

## PALO CRISTI RESIDENCE - THEATER APPLIANCES

5815 N. PALO CRISTI RD, PARADISE VALLEY, AZ 85253

S-5.3



WOLF  
30" M SERIES CONTEMPORARY  
COFFEE SYSTEM  
EC3050CM/B  
QTY: (1)



SUBZERO  
30" DESIGNER REFRIDGERATOR  
DRAWERS PANEL-READY  
ID-30R  
(QTY : 1 )



COVE PANEL READY DISHWASHER  
DW2450WS  
QTY: (1)



WOLF  
30" M SERIES CONTEMPORATRY SPEED OVEN  
SPO30CM/B/TH  
QTY: (1)

## PALO CRISTI RESIDENCE - VIEW LOFT APPLIANCES

5815 N. PALO CRISTI RD, PARADISE VALLEY, AZ 85253

S-5.2





SUBZERO  
30" DESIGNER REFRIDGERATOR /  
FREEZER DRAWERS WITH ICE  
PANEL-READY  
ID-30CI  
(QTY : 1 )



WOLF  
24" TRANSITIONAL MICROWAVE  
DRAWER  
MD24TE/S  
(QTY : 1 )

## PALO CRISTI RESIDENCE - CASITA APPLIANCES

5815 N. PALO CRISTI RD, PARADISE VALLEY, AZ 85253

S-5.2



ELECTROLUX  
FRONT LOAD PERFECT STEAM™  
WASHER WITH LUXCARE® PLUS WASH  
AND SMARTBOOST® - 4.5 CU. FT.  
FINISH: TITANIUM  
ELFW7637AT  
QTY : (2)  
\*with stack unit\*

ELECTROLUX  
FRONT LOAD PERFECT STEAM™ GAS  
DRYER WITH LUXCARE® DRY AND  
INSTANT REFRESH - 8.0 CU. FT.  
FINISH: TITANIUM  
ELFG7637AT  
QTY : (2)  
\*with stack unit\*

## PALO CRISTI RESIDENCE - LAUNDRY APPLIANCES

5815 N. PALO CRISTI RD, PARADISE VALLEY, AZ 85253

S-5.4





WOLF  
42" ACCESS DOORS  
827602  
QTY : (1)



WOLF  
42" OUTDOOR GAS GRILL  
NATURAL GAS  
OG42  
QTY : (1)



WOLF  
TRASH DRAWER  
827370  
QTY : (1)



WOLF  
52" PRO HOOD LINER 19" DEPTH  
PL521912  
QTY : (1)

## PALO CRISTI RESIDENCE - BBQ APPLIANCES

5815 N. PALO CRISTI RD, PARADISE VALLEY, AZ 85253

S-5.6





BRIZO  
SOLNA  
SINGLE HANDLE PULL-OUT KITCHEN FAUCET  
63220LF-BL  
FINISH: MATTE BLACK  
QTY: (1)



BLANCO  
PRECIS  
SUPER SINGLE SINK (36")  
440149  
FINISH : SILGRANIT ANTHRACITE  
QTY: (1)



BRIZO  
SOLNA  
SOAP DISPENSER  
RP79275BL  
FINISH: MATTE BLACK  
QTY: (1)



INSINKERATOR  
BADGER 5  
GARBAGE DISPOSAL  
QTY: (1)



CALIFORNIA FAUCETS  
AIR ACTIVATION SWITCH  
FOR DISPOSER  
9610-K50-BLK  
FINISH: BLACK  
QTY: (1)

## KITCHEN

# PALO CRISTI RESIDENCE - PLUMBING

5815 N. PALO CRISTI RD, PARADISE VALLEY, AZ 85253



INSINKERATOR  
SHOWROOM COLLECTION  
MODERN 3020 INSTANT HOT  
AND COLD FAUCET  
45396Y-ISE  
FINISH: MATTE BLACK  
QTY: (1)




BRIZO  
SOLNA  
SINGLE HANDLE PULL-OUT KITCHEN FAUCET  
63220LF-BL  
FINISH: MATTE BLACK  
QTY: (1)



INSINKERATOR  
BADGER 5  
GARBAGE DISPOSAL  
QTY: (1)



BRIZO  
SOLNA  
SOAP DISPENSER  
RP79275BL  
FINISH: MATTE BLACK  
QTY: (1)

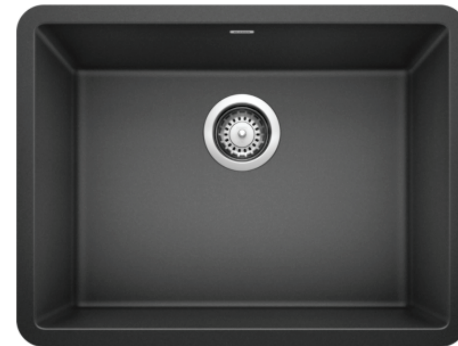

BLANCO  
PRECIS  
SUPER SINGLE SINK (24")  
522258  
FINISH : SILGRANIT ANTHRACITE  
QTY: (1)



CALIFORNIA FAUCETS  
AIR ACTIVATION SWITCH  
FOR DISPOSER  
9610-K50-BLK  
FINISH: BLACK  
QTY: (1)

BAR

PALO CRISTI RESIDENCE - PLUMBING

5815 N. PALO CRISTI RD, PARADISE VALLEY, AZ 85253





BRIZO  
SOLNA  
SOAP DISPENSER  
RP79275BL  
FINISH: MATTE BLACK  
QTY: (1)



BLANCO  
PRECIS  
SINGLE SINK (30")  
442534  
FINISH : SILGRANIT ANTHRACITE  
QTY: (1)




BRIZO  
SOLNA  
SINGLE HANDLE PULL-OUT KITCHEN FAUCET  
63220LF-BL  
FINISH: MATTE BLACK  
QTY: (1)


## PALO CRISTI RESIDENCE- LAUNDRY PLUMBING

5815 N. PALO CRISTI RD, PARADISE VALLEY, AZ 85253

S-6.2

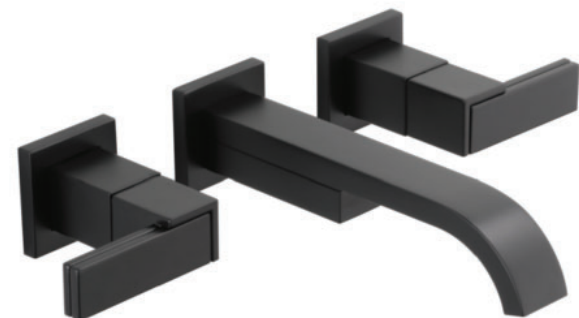

BRIZO SIDERNA  
TWO-HANDLE WALL MOUNT LAVATORY  
FAUCET - LESS HANDLES 1.2 GPM  
65880LF-BLLHP-ECO, HL5880-BL  
FINISH: MATTE BLACK  
QTY: (1)

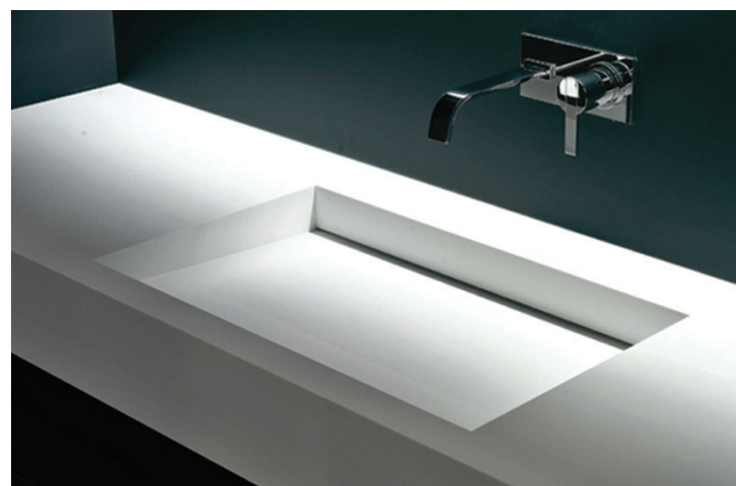

CUSTOM INTEGRAL SINK WITH HIDDEN  
LINEAR DRAIN  
QTY: (1)



TOTO  
NEOREST® RH DUAL FLUSH TOILET - 1.0 GPF  
& 0.8 GPF  
MS988CUMFG#01  
QTY: (1)



BRIZO SIDERNA  
TOWEL RING  
694680-BL  
MATTE BLACK  
QTY: (1)



BRIZO SIDERNA  
TISSUE HOLDER  
695080-BL  
MATTE BLACK  
QTY: (1)


# PALO CRISTI RESIDENCE - POWDER BATH PLUMBING

5815 N. PALO CRISTI RD, PARADISE VALLEY, AZ 85253






BRIZO ESSENTIAL  
12" LINEAR SQUARE SINGLE-FUNCTION RAINCAN  
SHOWER HEAD - 2.5 GPM  
81399-BL-2.5  
QTY: (1)

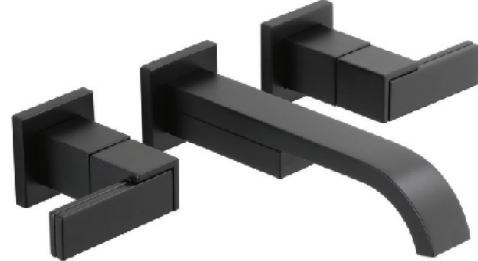

BRIZO SIDERNA  
TWO-HANDLE WALL MOUNT LAVATORY  
FAUCET - LESS HANDLES 1.5 GPM  
65880LF-BLLHP  
MATTE BLACK  
QTY: (2)

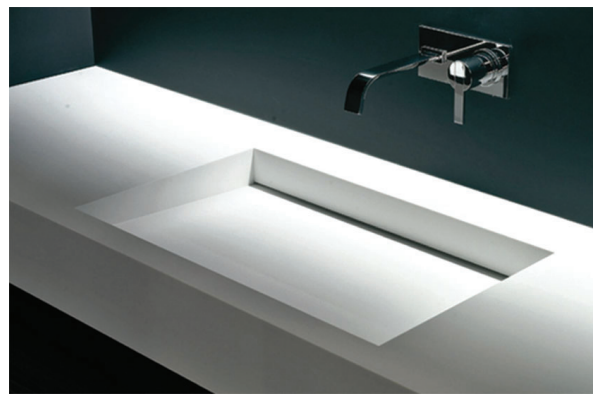

CUSTOM INTEGRAL SINK WITH HIDDEN  
LINEAR DRAIN  
QTY: (2)



BRIZO SIDERNA  
TISSUE HOLDER  
695080-BL  
MATTE BLACK  
QTY: (2)



BRIZO SIDERNA  
TOWEL RING  
694680-BL  
MATTE BLACK  
QTY: (2)



BRIZO SIDERNA  
DOUBLE ROBE HOOK  
693580-BL  
MATTE BLACK  
QTY: (2 SETS)



KOHLER  
BOTTLE TRAP, 1-1/4" X 1-1/4"  
K-9033-BL  
MATTE BLACK  
QTY: 2



BRIZO SIDERNA  
SINGLE-FUNCTION SLIDE BAR  
HAND SHOWER  
85780-BL  
MATTE BLACK  
QTY: (1)



BRIZO SIDERNA  
TEMPASSURE THERMOSTATIC VALVE  
WITH INTEGRATED 6-FUNCTION  
DIVERter TRIM  
T75680-BL  
QTY: (1)



BRIZO  
7" LINEAR ROUND H2OKINETIC® MULTI-FUNC-  
TION WALL MOUNT SHOWER HEAD - 1.5 GPM  
87492-BL-1.5

7" LINEAR SQUARE WALL MOUNT SHOWER  
ARM AND FLANGE  
RP74448BL  
MATTE BLACK  
QTY: (2)




VICTORIA AND ALBERT  
VETRALLA 2  
22" TALL X 29-1/8" WIDE X 58-3/4" LONG  
FINISH: MATTE BLACK  
QTY: (1)



BRIZO SIDERNA  
SINGLE-HANDLE FREESTANDING TUB FILLER  
T70180-BL, R70100  
MATTE BLACK  
QTY: (1)



TOTO  
NEOREST® RH DUAL FLUSH TOILET - 1.0 GPF  
& 0.8 GPF  
MS988CUMFG#01  
QTY: (2)

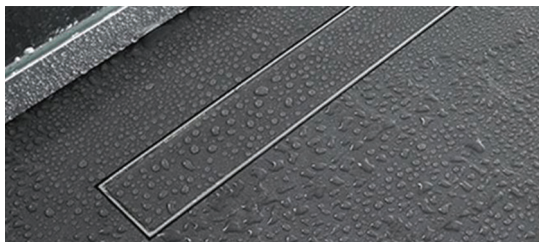

INFINITY DRAIN  
CUSTOM FIT  
WALL-TO-WALL  
TILE-IN  
FINISH: POLISHED CHROME

# PALO CRISTI RESIDENCE - MASTER BATH PLUMBING

5815 N. PALO CRISTI RD, PARADISE VALLEY, AZ 85253



BRIZO SIDERNA  
SINGLE-FUNCTION SLIDE BAR  
HAND SHOWER  
85780-BL  
MATTE BLACK  
QTY: (4)



BRIZO  
7" LINEAR ROUND H2OKINETIC® MULTI-FUNC-  
TION WALL MOUNT SHOWER HEAD - 1.5 GPM  
87492-BL-1.5  
7" LINEAR SQUARE WALL MOUNT SHOWER  
ARM AND FLANGE  
RP74448BL  
MATTE BLACK  
QTY: (4)



BRIZO SIDERNA  
WIDESPREAD LAVATORY FAUCET -  
LESS HANDLES 1.5 GPM  
65380LF-BLLHP - HL5380-BL  
MATTE BLACK  
QTY: (4)



BRIZO SIDERNA  
TISSUE HOLDER  
695080-BL  
MATTE BLACK  
QTY: (4)



BRIZO SIDERNA  
TOWEL RING  
694680-BL  
MATTE BLACK  
QTY: (4)



BRIZO SIDERNA  
TEMPASSURE THERMOSTATIC VALVE  
WITH INTEGRATED 6-FUNCTION  
DIVERTER TRIM  
T75680-BL  
QTY: (4)




TOTO  
UNDERCOUNTER LAVATORY  
LT191G#01  
QTY: (4)



TOTO  
LEGATO™ ONE-PIECE TOILET, 1.28GPF, ELONGATED  
BOWL - WASHLET®+ CONNECTION  
MS624124CEFG#01  
QTY: (4)



BRIZO SIDERNA  
DOUBLE ROBE HOOK  
693580-BL  
MATTE BLACK  
QTY: (4 SETS)

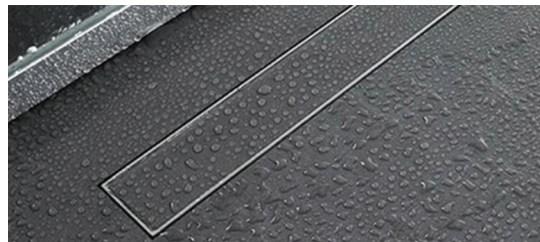

INFINITY DRAIN  
CUSTOM FIT  
WALL-TO-WALL  
TILE-IN  
FINISH: BLACK  
QTY:4

BATH 1 , BATH 2 , BATH 3, CASITA

# PALO CRISTI RESIDENCE - SECONDARY BATH PLUMBING

5815 N. PALO CRISTI RD, PARADISE VALLEY, AZ 85253






BRIZO  
SOLNA  
SOAP DISPENSER  
RP79275BL  
FINISH: MATTE BLACK  
QTY: (1)



BRIZO  
SOLNA  
SINGLE HANDLE PULL-OUT KITCHEN FAUCET  
63220LF-BL  
FINISH: MATTE BLACK  
QTY: (1)

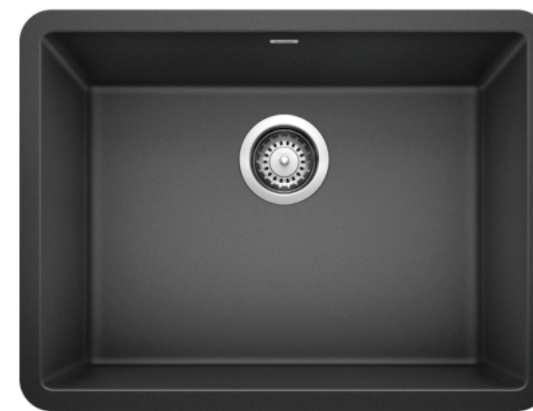

BLANCO  
PRECIS  
SUPER SINGLE SINK (24")  
522258  
FINISH : SILGRANIT ANTHRACITE  
QTY: (1)


## PALO CRISTI RESIDENCE - VIEW LOFT PLUMBING

5815 N. PALO CRISTI RD, PARADISE VALLEY, AZ 85253

S-6.6



BRIZO | ODIN  
PULL DOWN FAUCET W/ ARC SPOUT - LESS HANDLE  
63075LF-PCLHP  
PULL-DOWN FAUCET LEVER HANDLE  
HLK175-PC  
FINISH: POLISHED CHROME  
(QTY: 1)

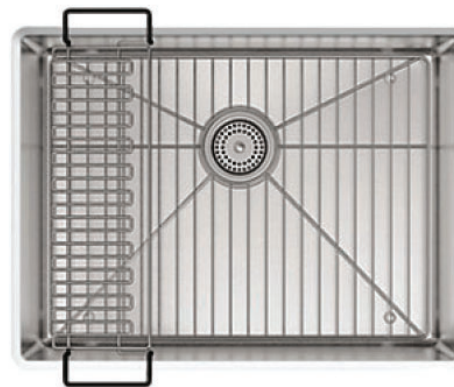


KOHLER STRIVE  
24" x 18-1/4" x 9-5/16" UNDERMOUNT  
SINGLE-BOWL KITCHEN SINK WITH RACK  
K-5286-NA  
FINISH: STAINLESS STEEL  
(QTY: 1)

## PALO CRISTI RESIDENCE - OUTDOOR BBQ

5815 N. PALO CRISTI RD, PARADISE VALLEY, AZ 85253

S-6.8



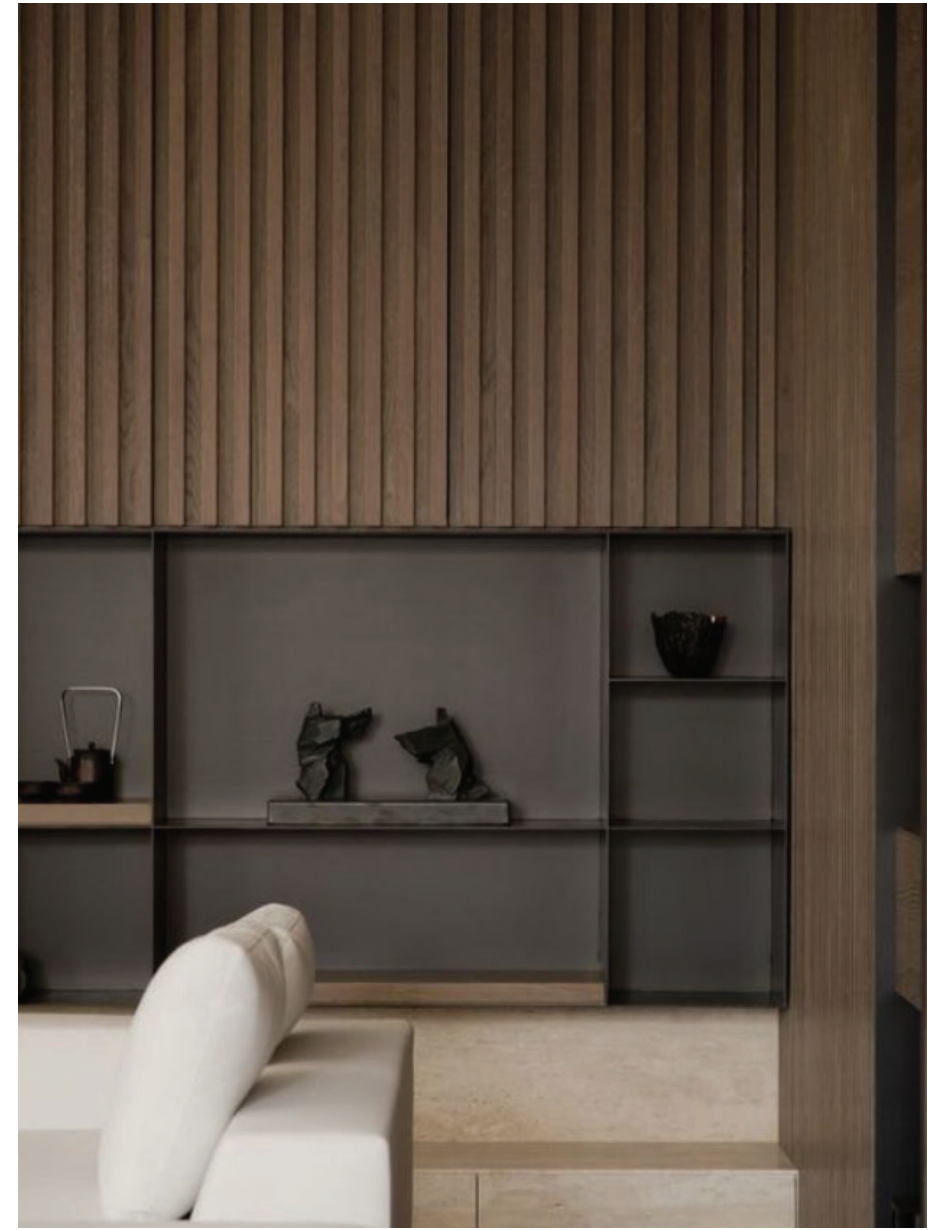

# PALO CRISTI RESIDENCE - CONCEPT IMAGES

5815 N. PALO CRISTI RD, PARADISE VALLEY, AZ 85253





# PALO CRISTI RESIDENCE - CONCEPT IMAGES

5815 N. PALO CRISTI RD, PARADISE VALLEY, AZ 85253



# PALO RESIDENCE - CONCEPT IMAGES

5815 N. PALO CRISTI RD, PARADISE VALLEY, AZ 85253






# PALO RESIDENCE - CONCEPT IMAGES

5815 N. PALO CRISTI RD, PARADISE VALLEY, AZ 85253





## PALO RESIDENCE - CONCEPT IMAGES


5815 N. PALO CRISTI RD, PARADISE VALLEY, AZ 85253

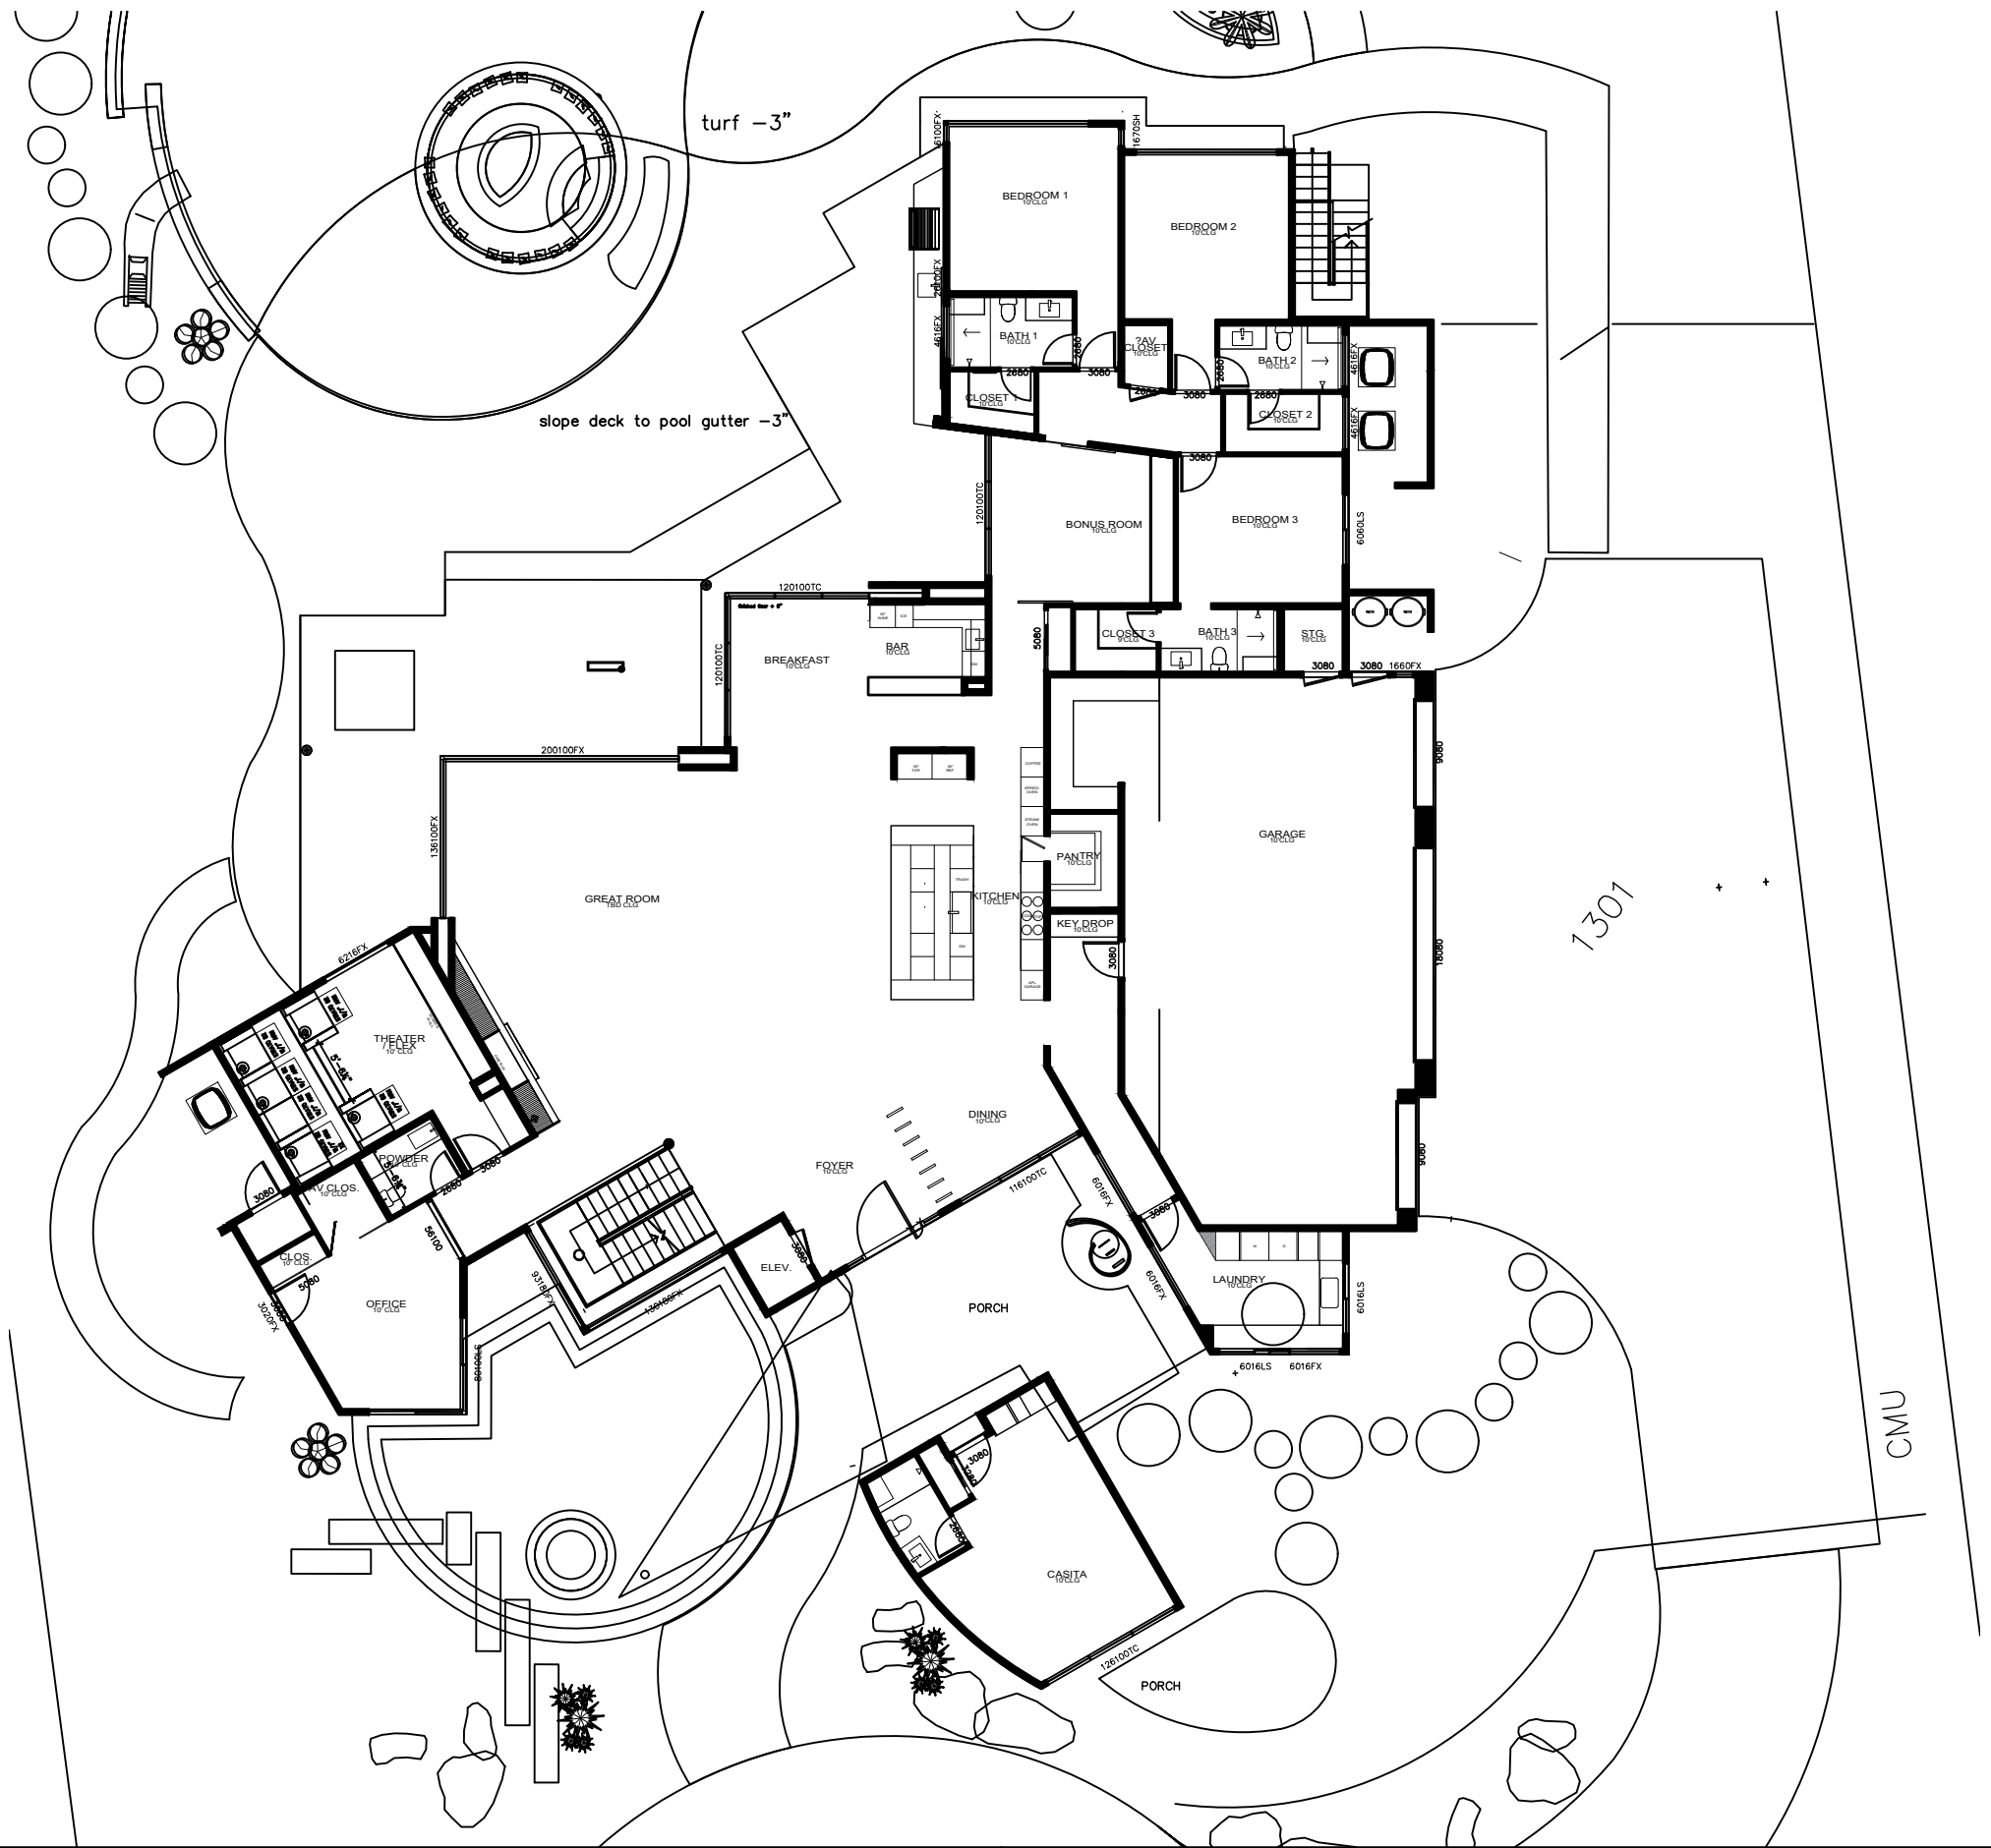




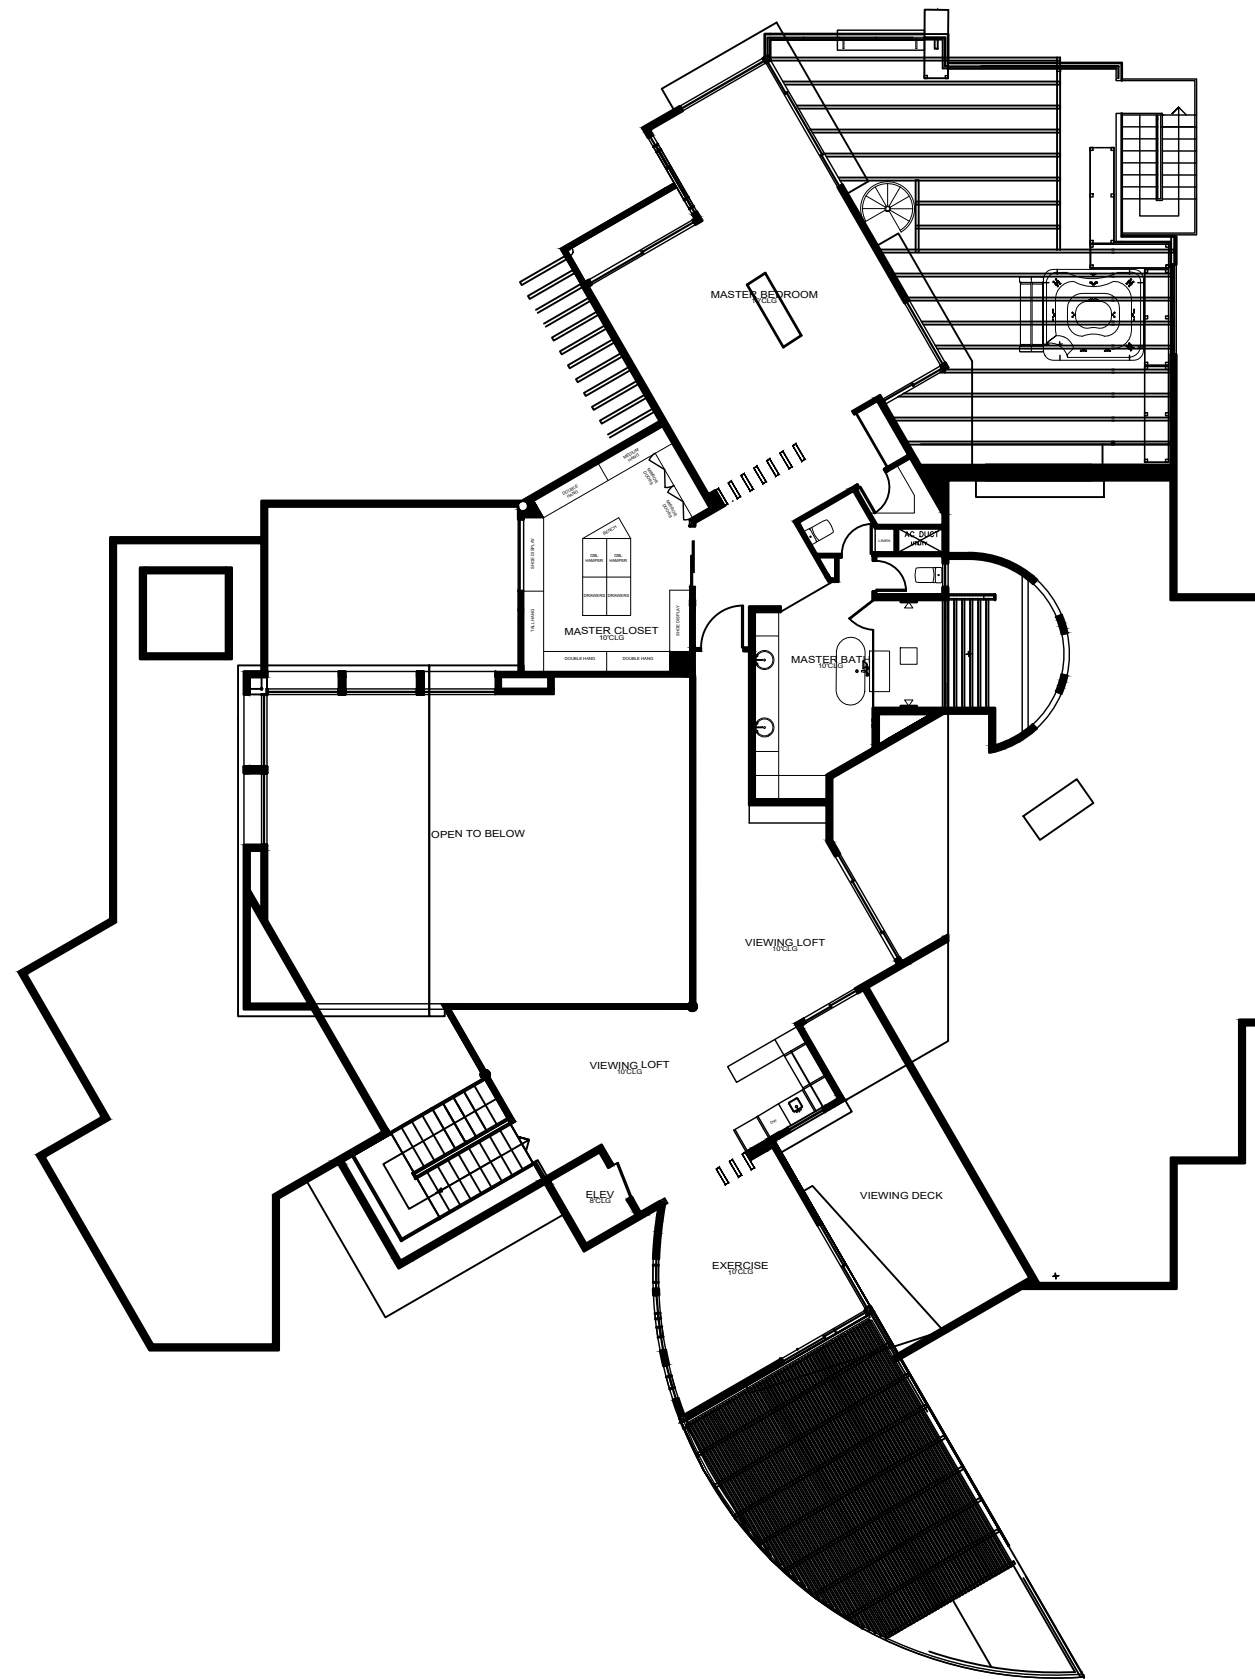

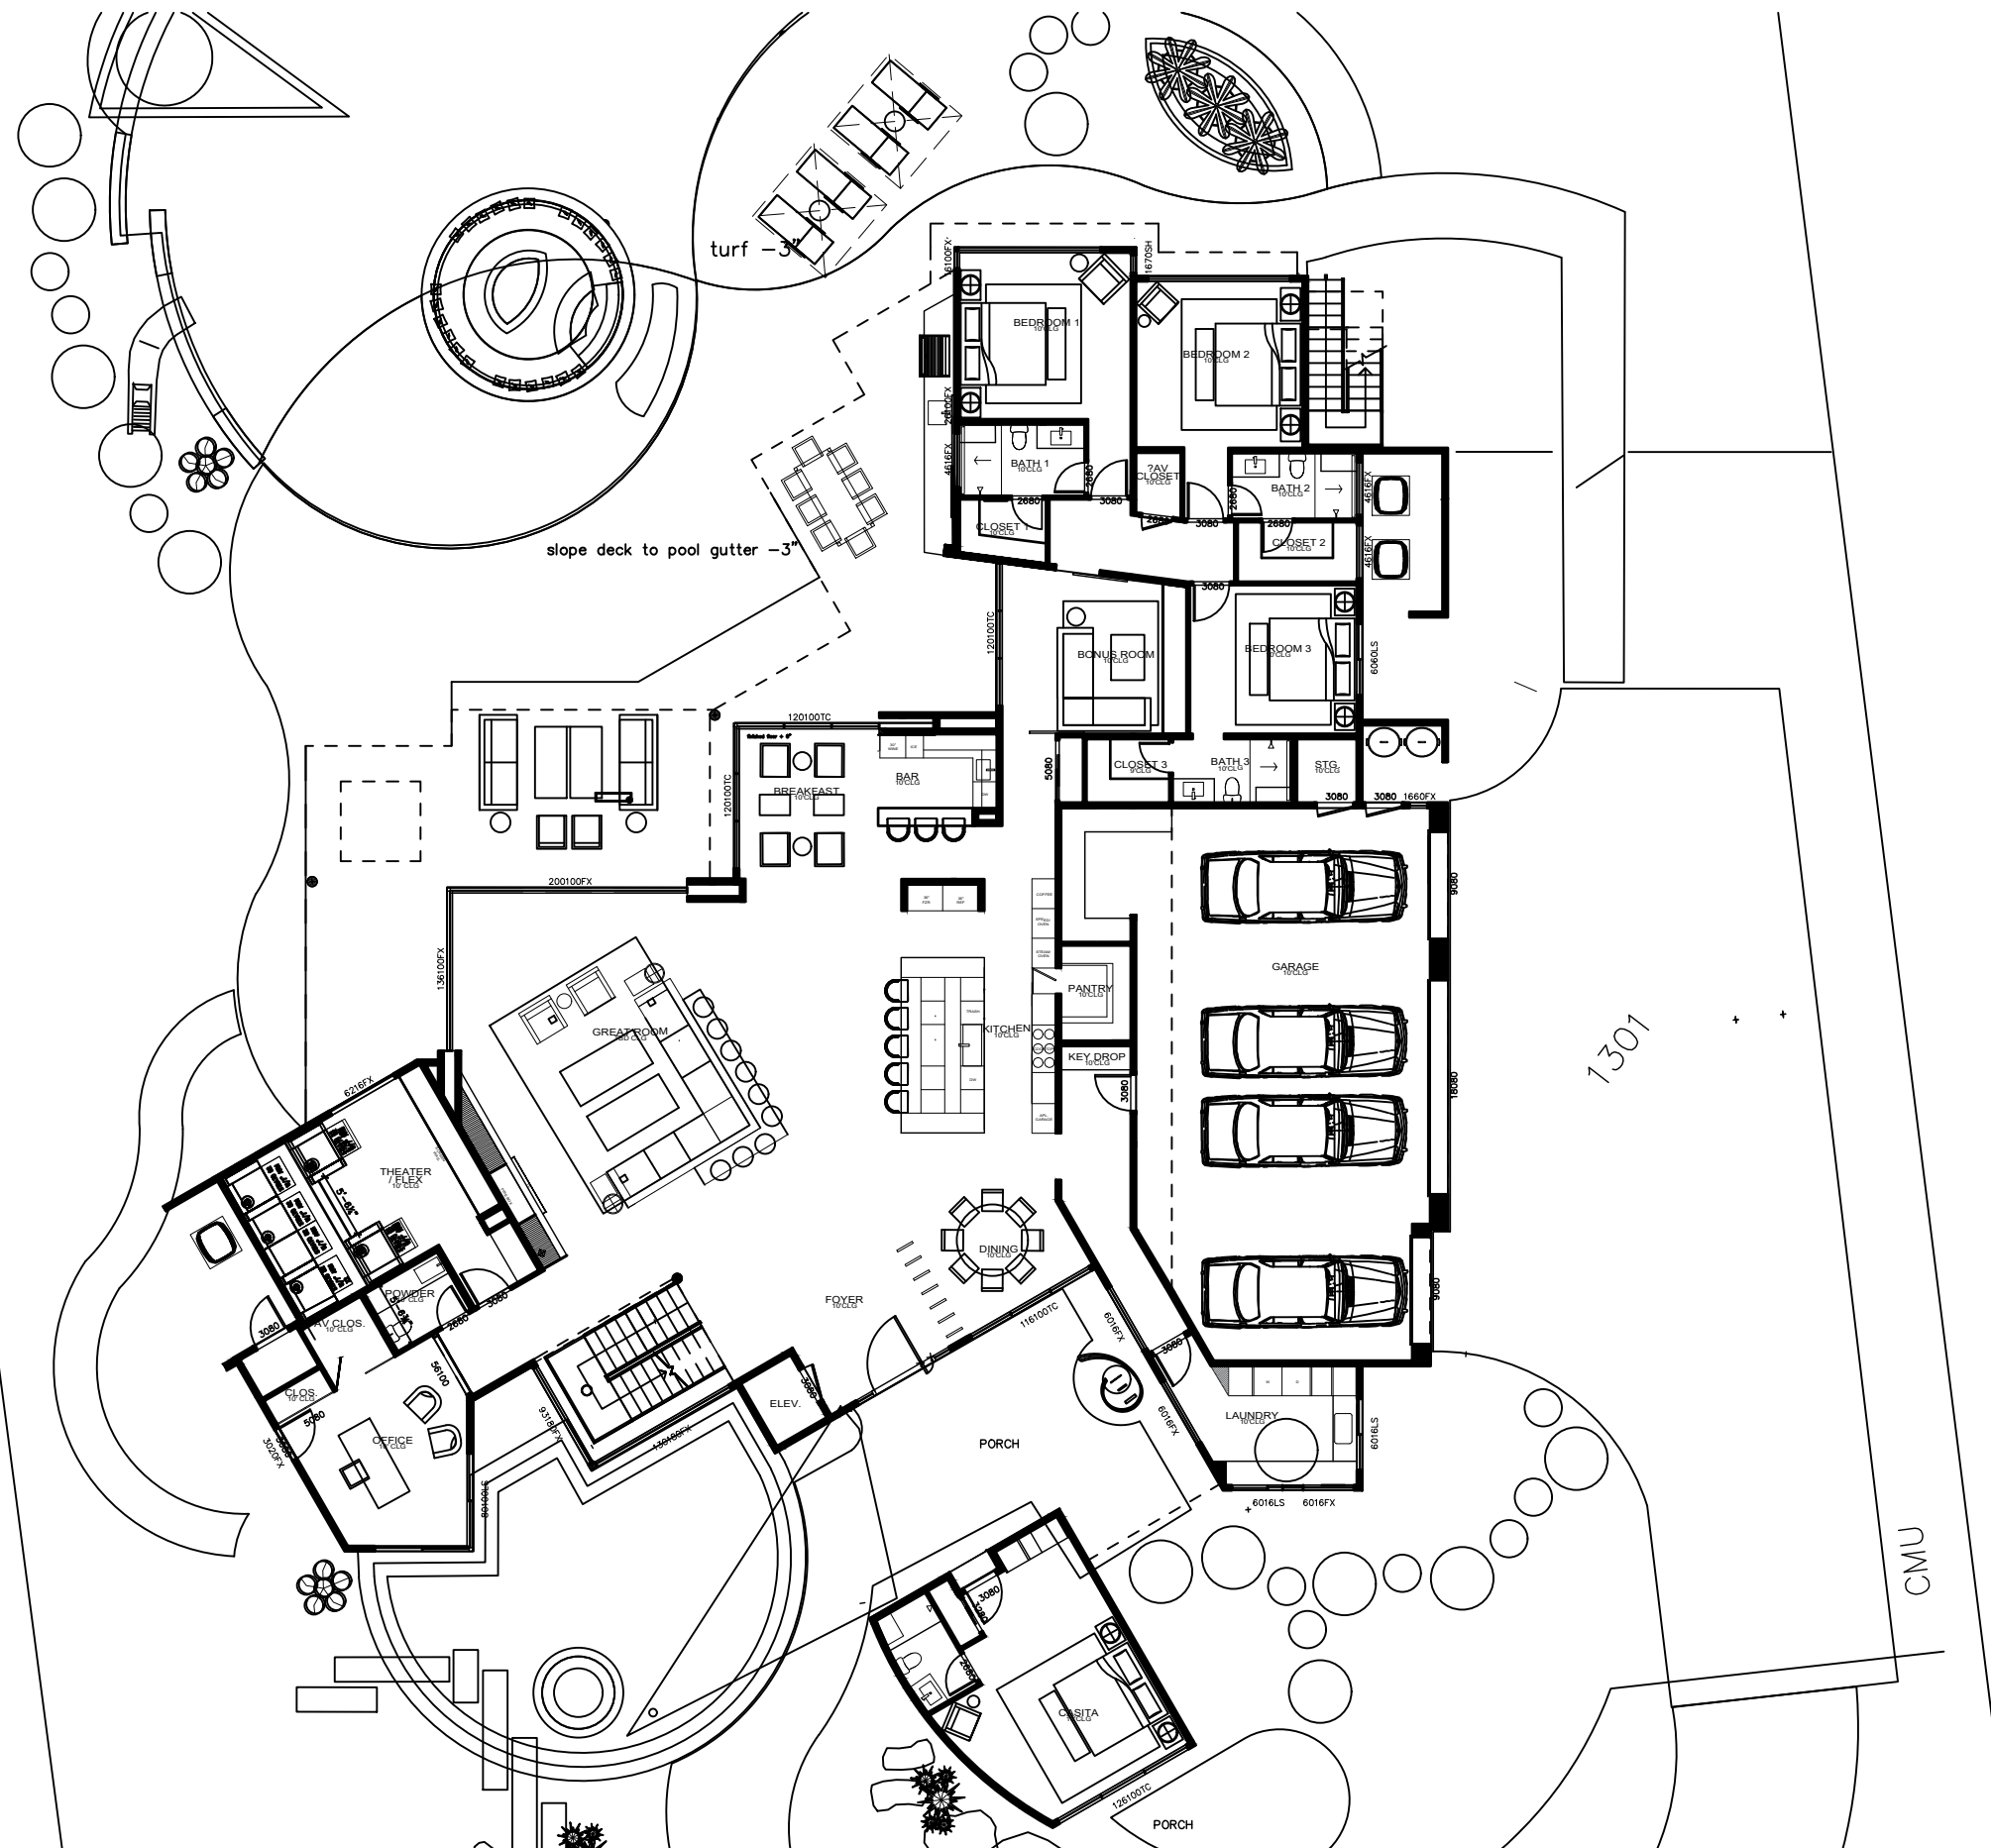


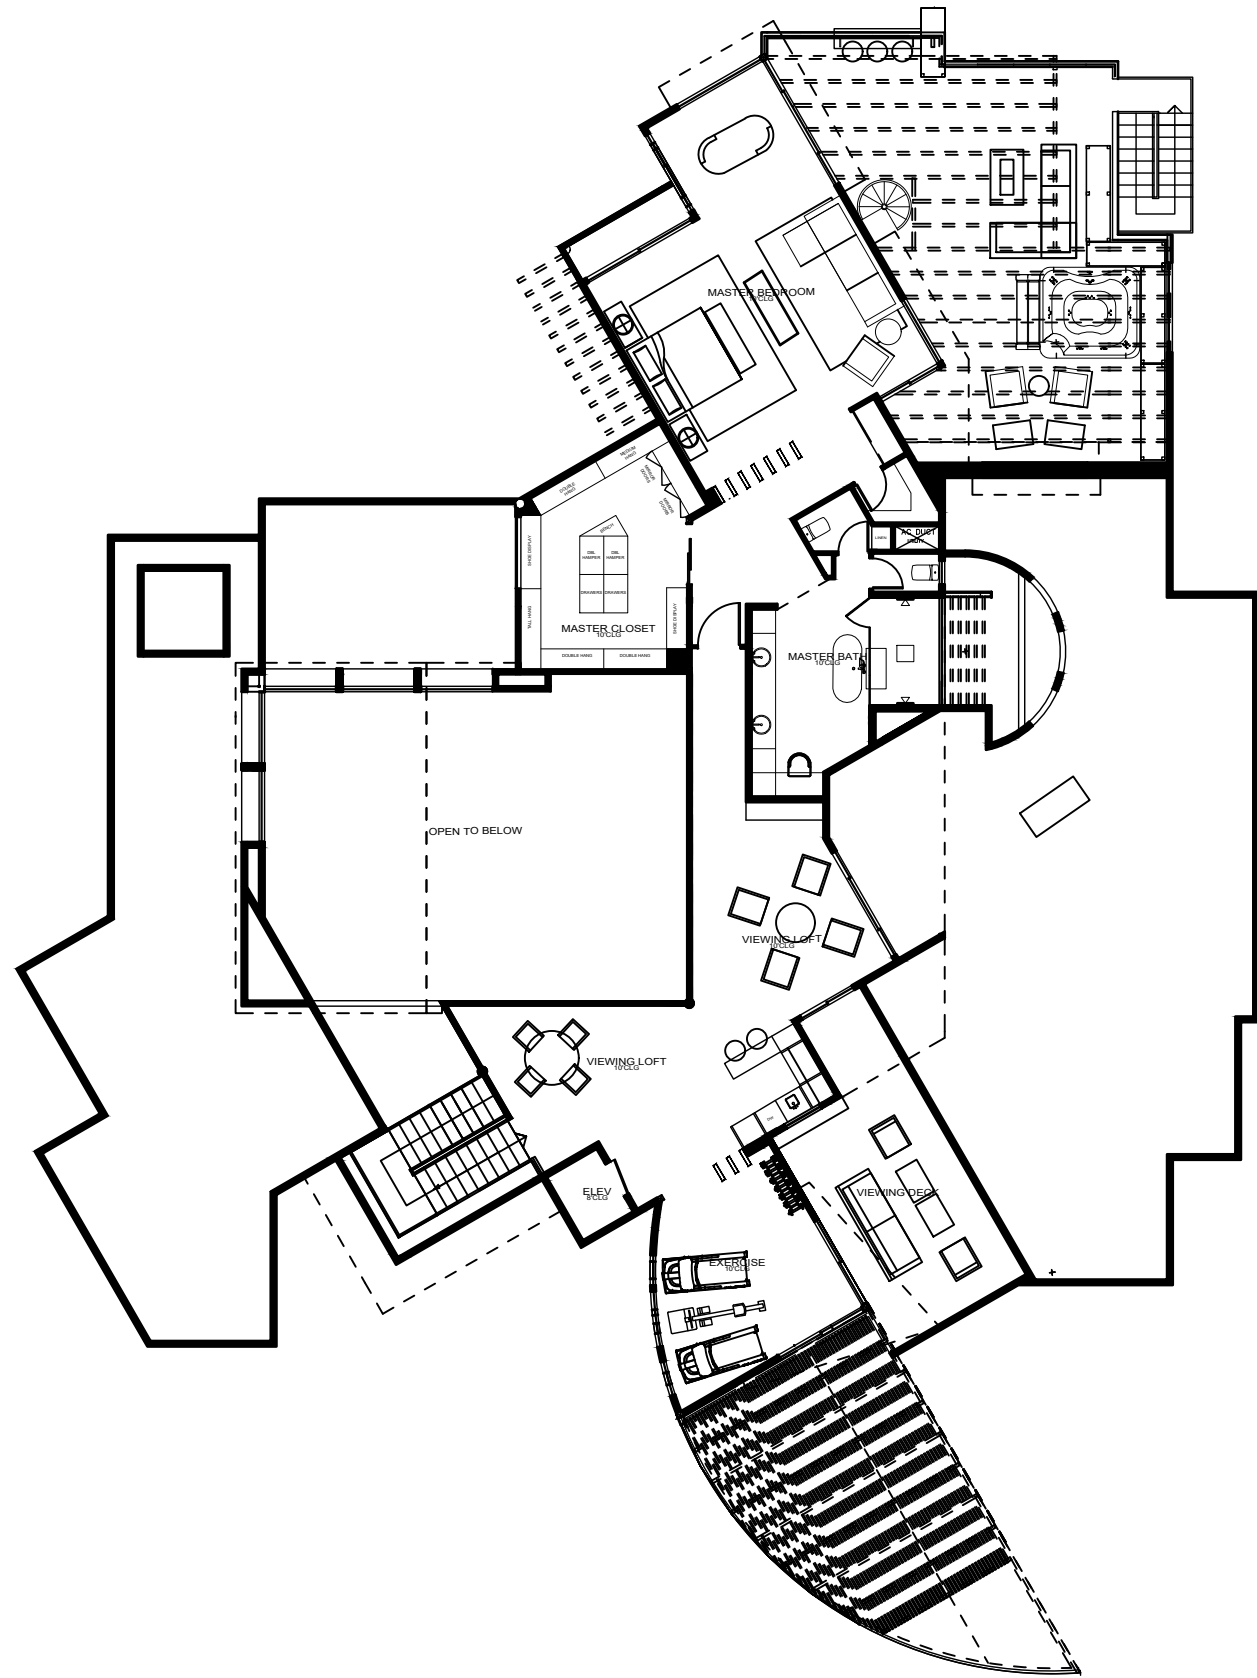



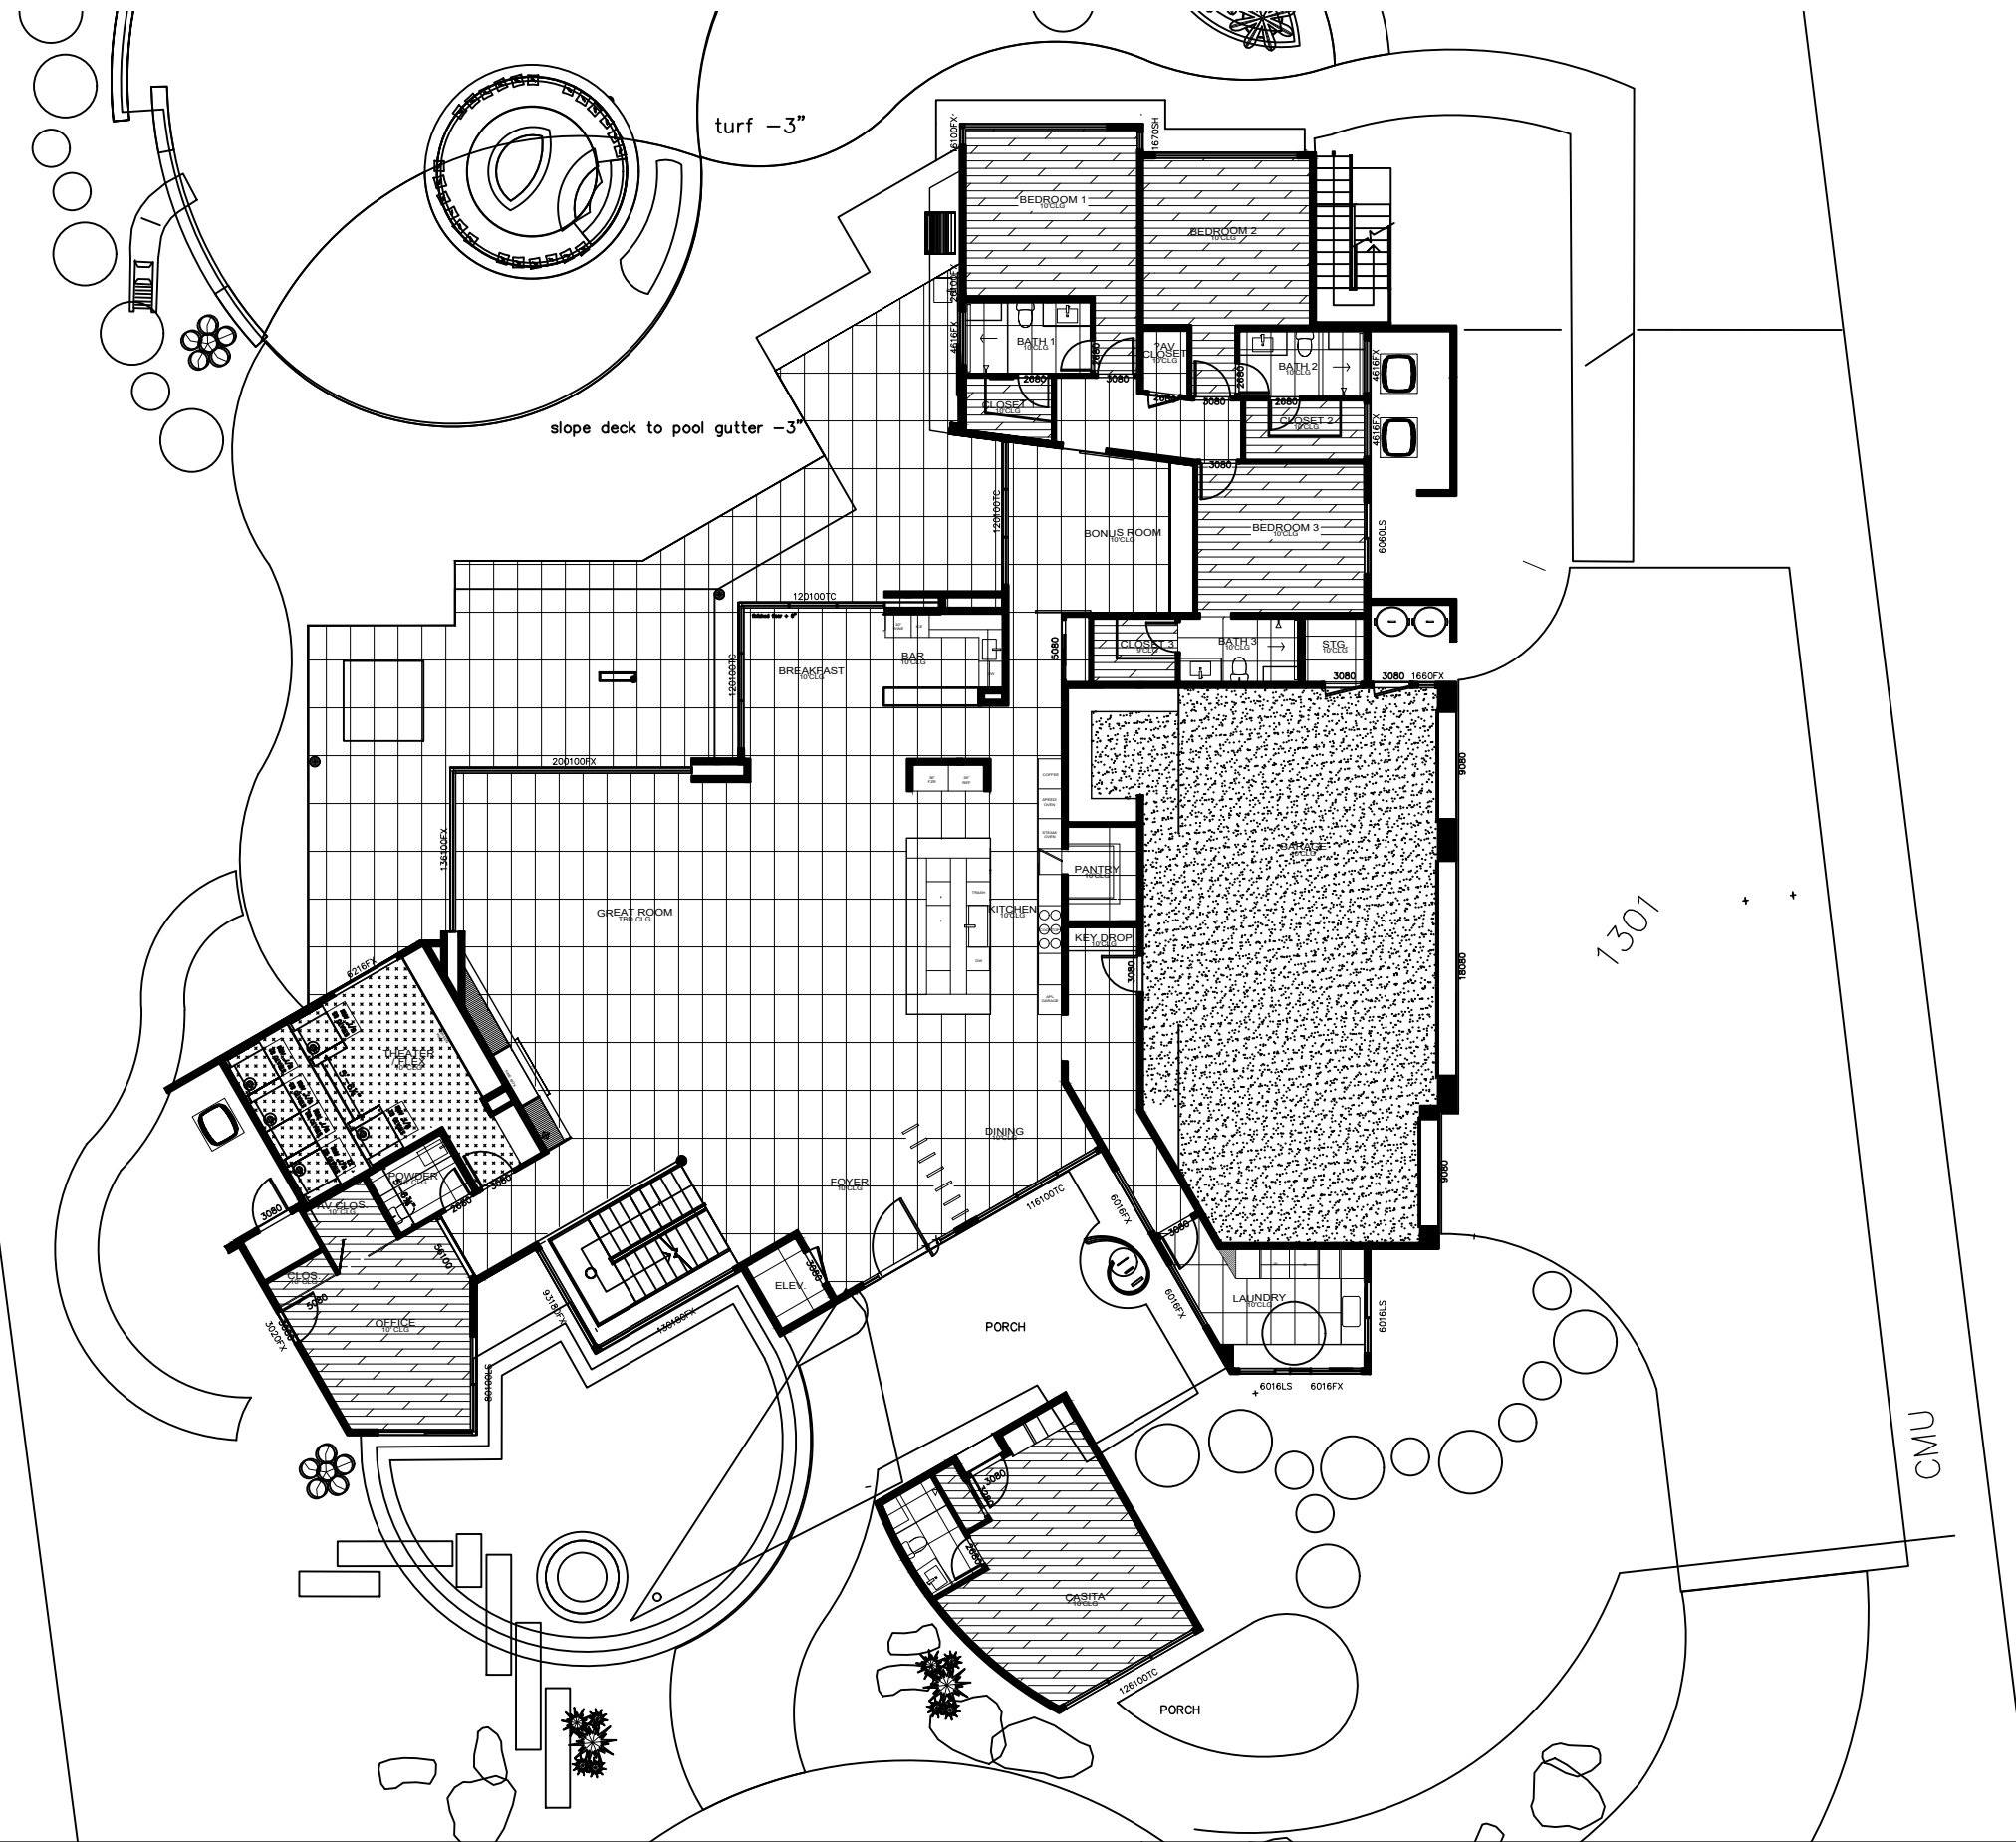

<p><b>MAIN HOUSE:</b> STONE TBD 24 X 48</p> <p><b>OFFICE, CASITA, BEDROOMS, CLOSETS AND VIEWING LOFT:</b> WOOD FLOORING LUGANO COLLECTION ORO EUROPEAN OAK</p> <p><b>EXTERIOR:</b> STONE TBD 24 X 48</p>	<p><b>EXERCISE:</b> FLOOR STYLES DECK COLOR COLOR: TBD VINYL 10' OR 86"</p> <p><b>GARAGE:</b> EPOXY TBD COLOR</p> <p><b>THEATER:</b> CARPET TBD COLOR</p>
--	---

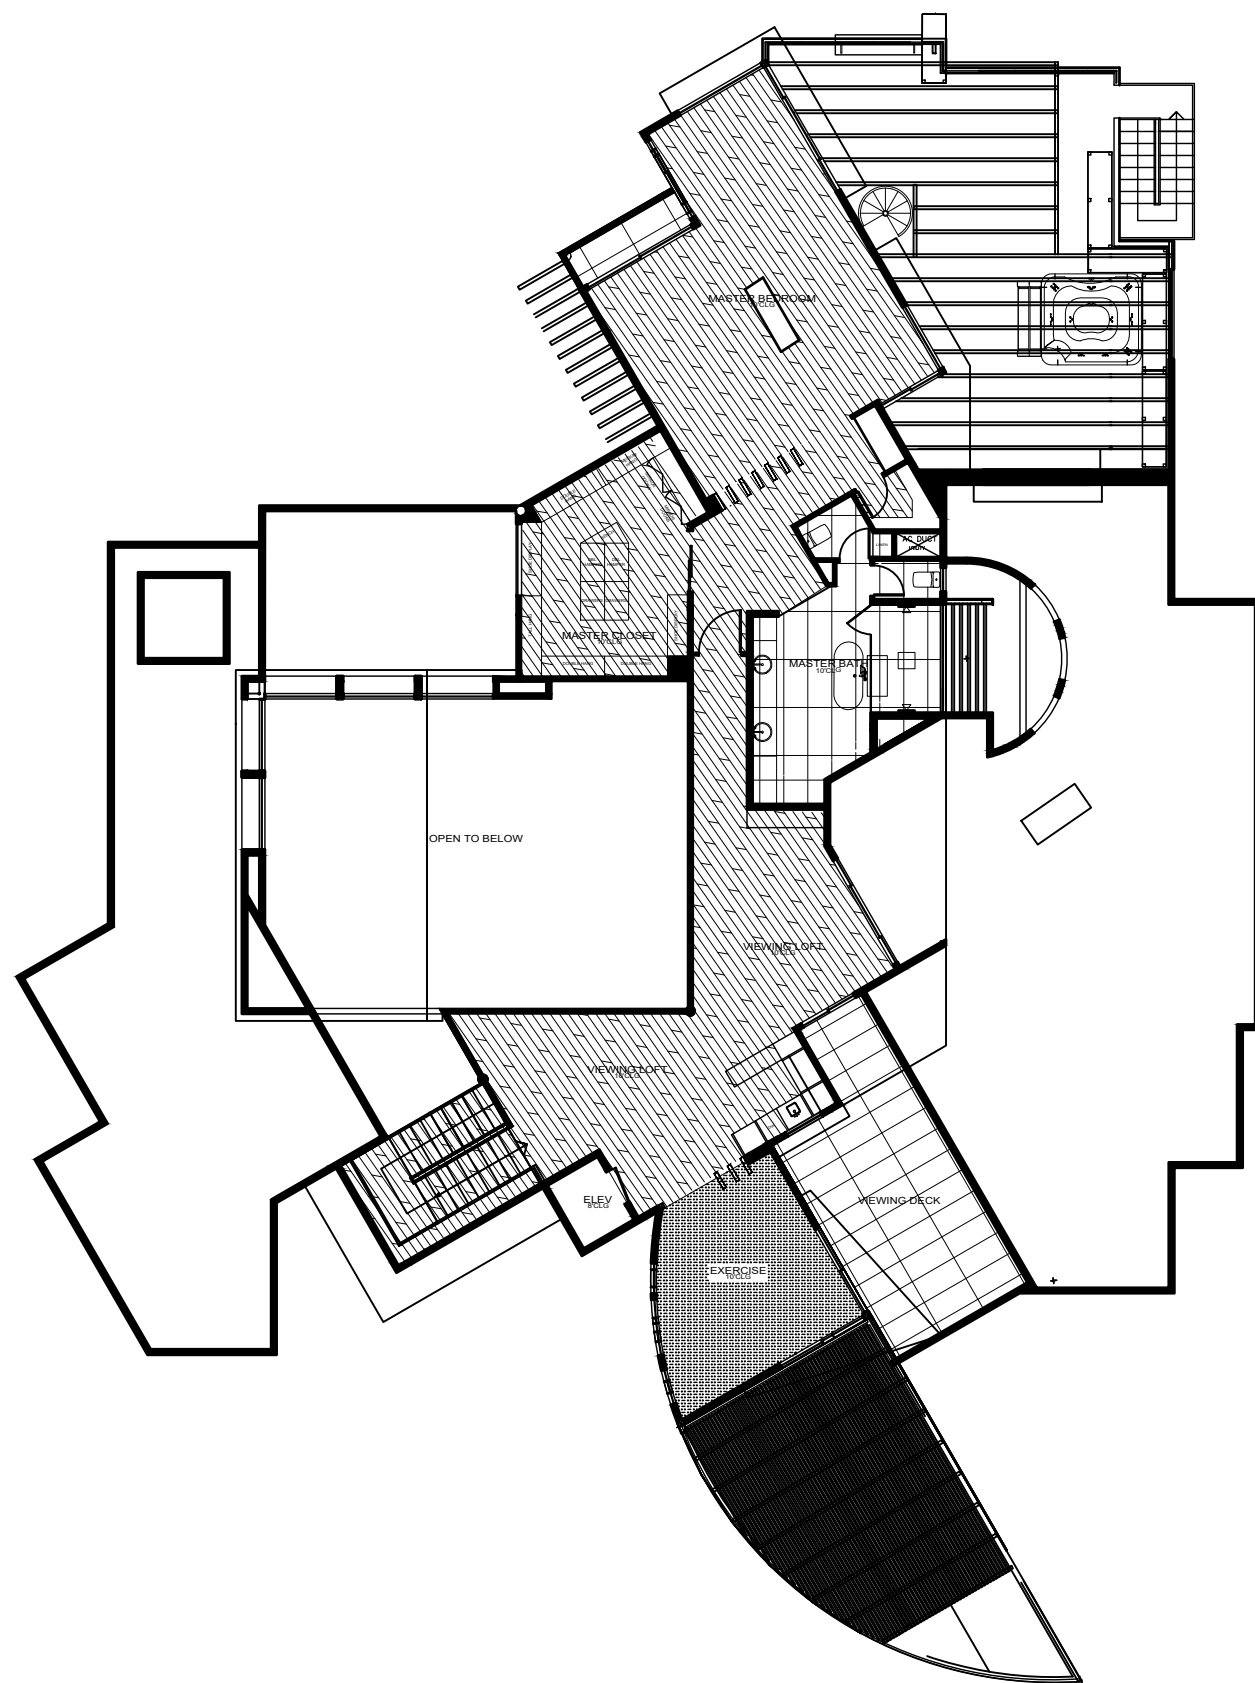


<p>MAIN HOUSE: STONE TBD 24 X 48</p>	<p>EXERCISE: FLOOR STYLES DECK COLOR COLOR: TBD VINYL 10' OR 86"</p>
<p>OFFICE, CASITA, BEDROOMS, CLOSETS AND VIEWING LOFT: WOOD FLOORING LUGANO COLLECTION ORO EUROPEAN OAK</p>	<p>GARAGE: EPOXY TBD COLOR</p>
<p>EXTERIOR: STONE TBD 24 X 48</p>	<p>THEATER: CARPET TBD COLOR</p>






**WALL FINISH PLAN KEY**

- =WALLPAPER
- =MIRROR
- =HOUSE STONE
- =ACCENT STONE
- =SLAB
- =DECO TILE
- =MILLWORK PANEL
- =METAL WRAP
- =ACOUSTICAL PANEL







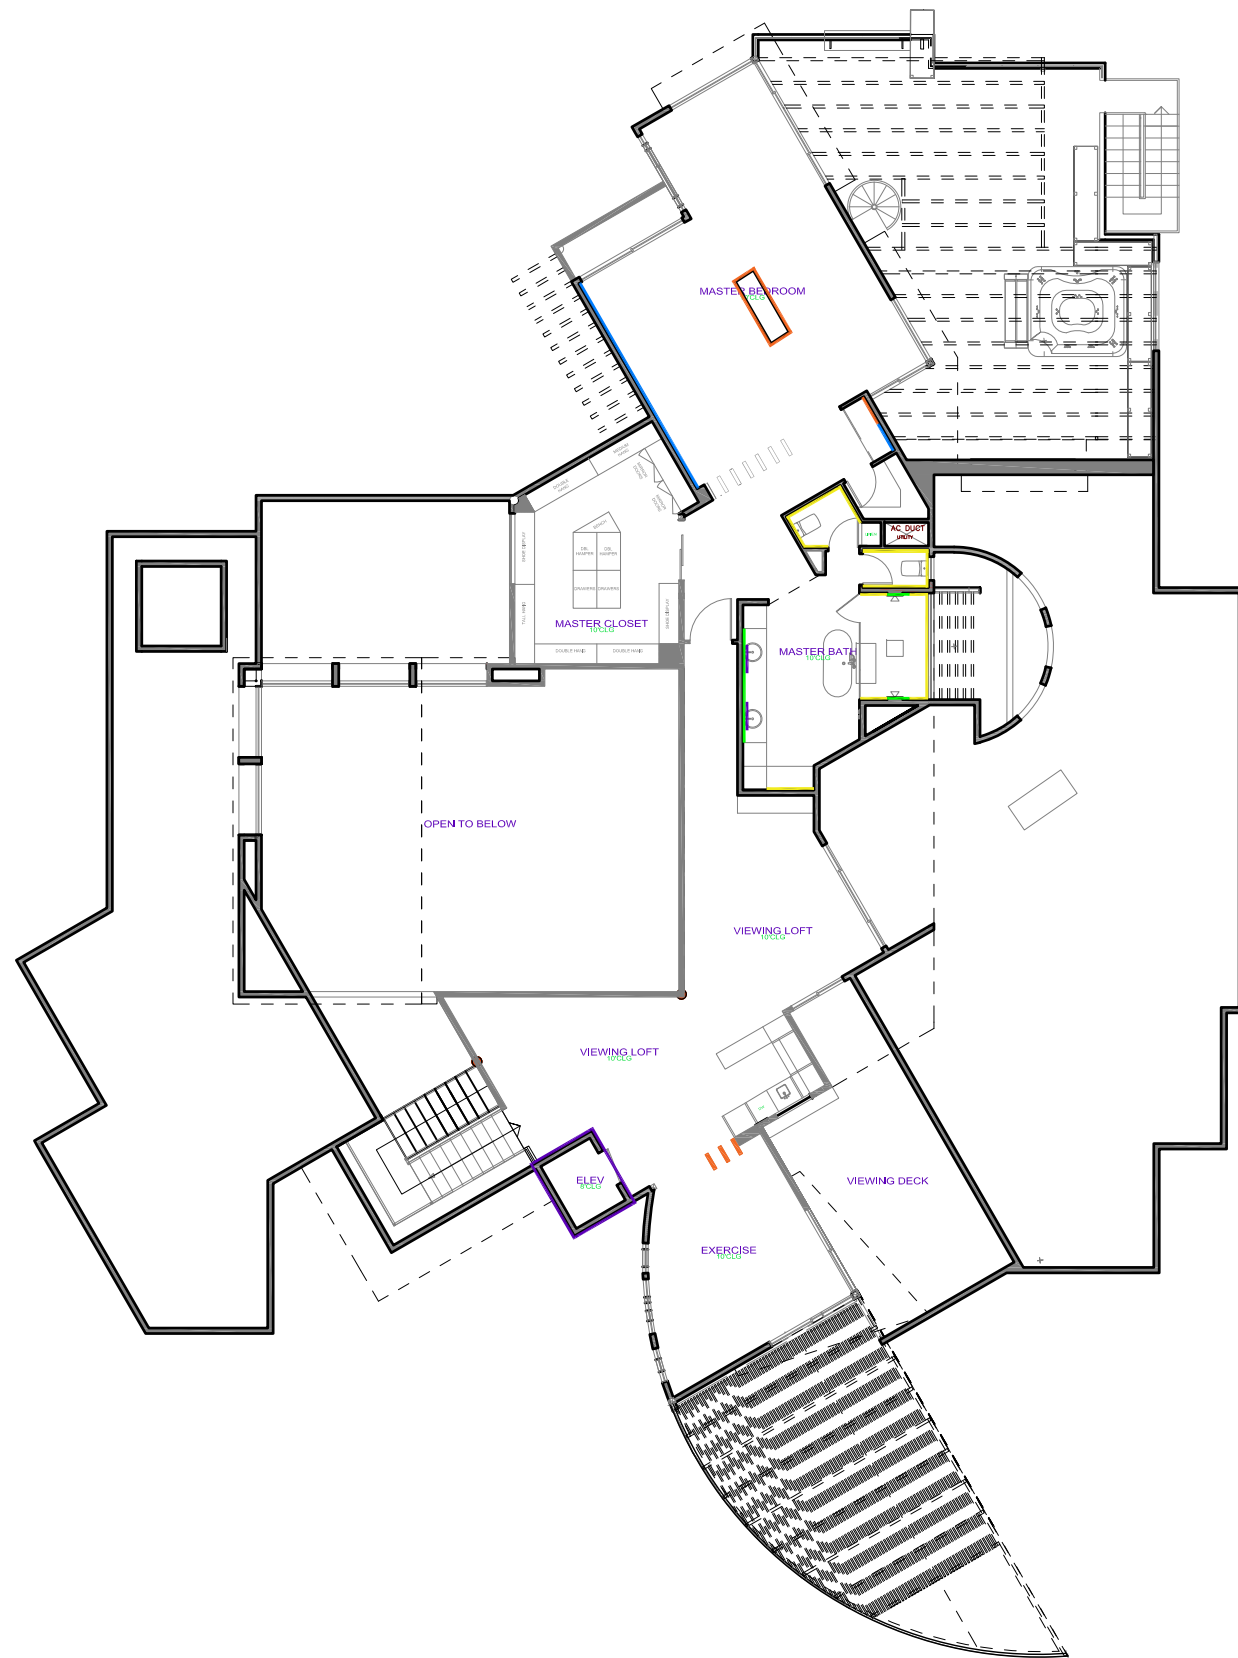

WALL FINISH PLAN KEY	
<span style="color: blue;">—</span>	=WALLPAPER
<span style="color: purple;">—</span>	=MIRROR
<span style="color: pink;">—</span>	=HOUSE STONE
<span style="color: lightblue;">—</span>	=ACCENT STONE
<span style="color: green;">—</span>	=SLAB
<span style="color: yellow;">—</span>	=DECO TILE
<span style="color: orange;">—</span>	=MILLWORK PANEL
<span style="color: red;">—</span>	=METAL WRAP
<span style="color: black;">—</span>	=ACOUSTICAL PANEL

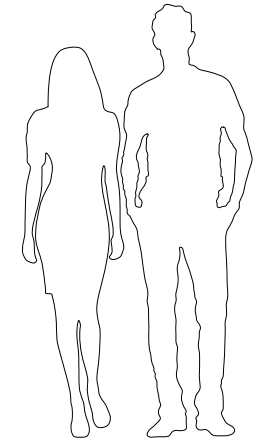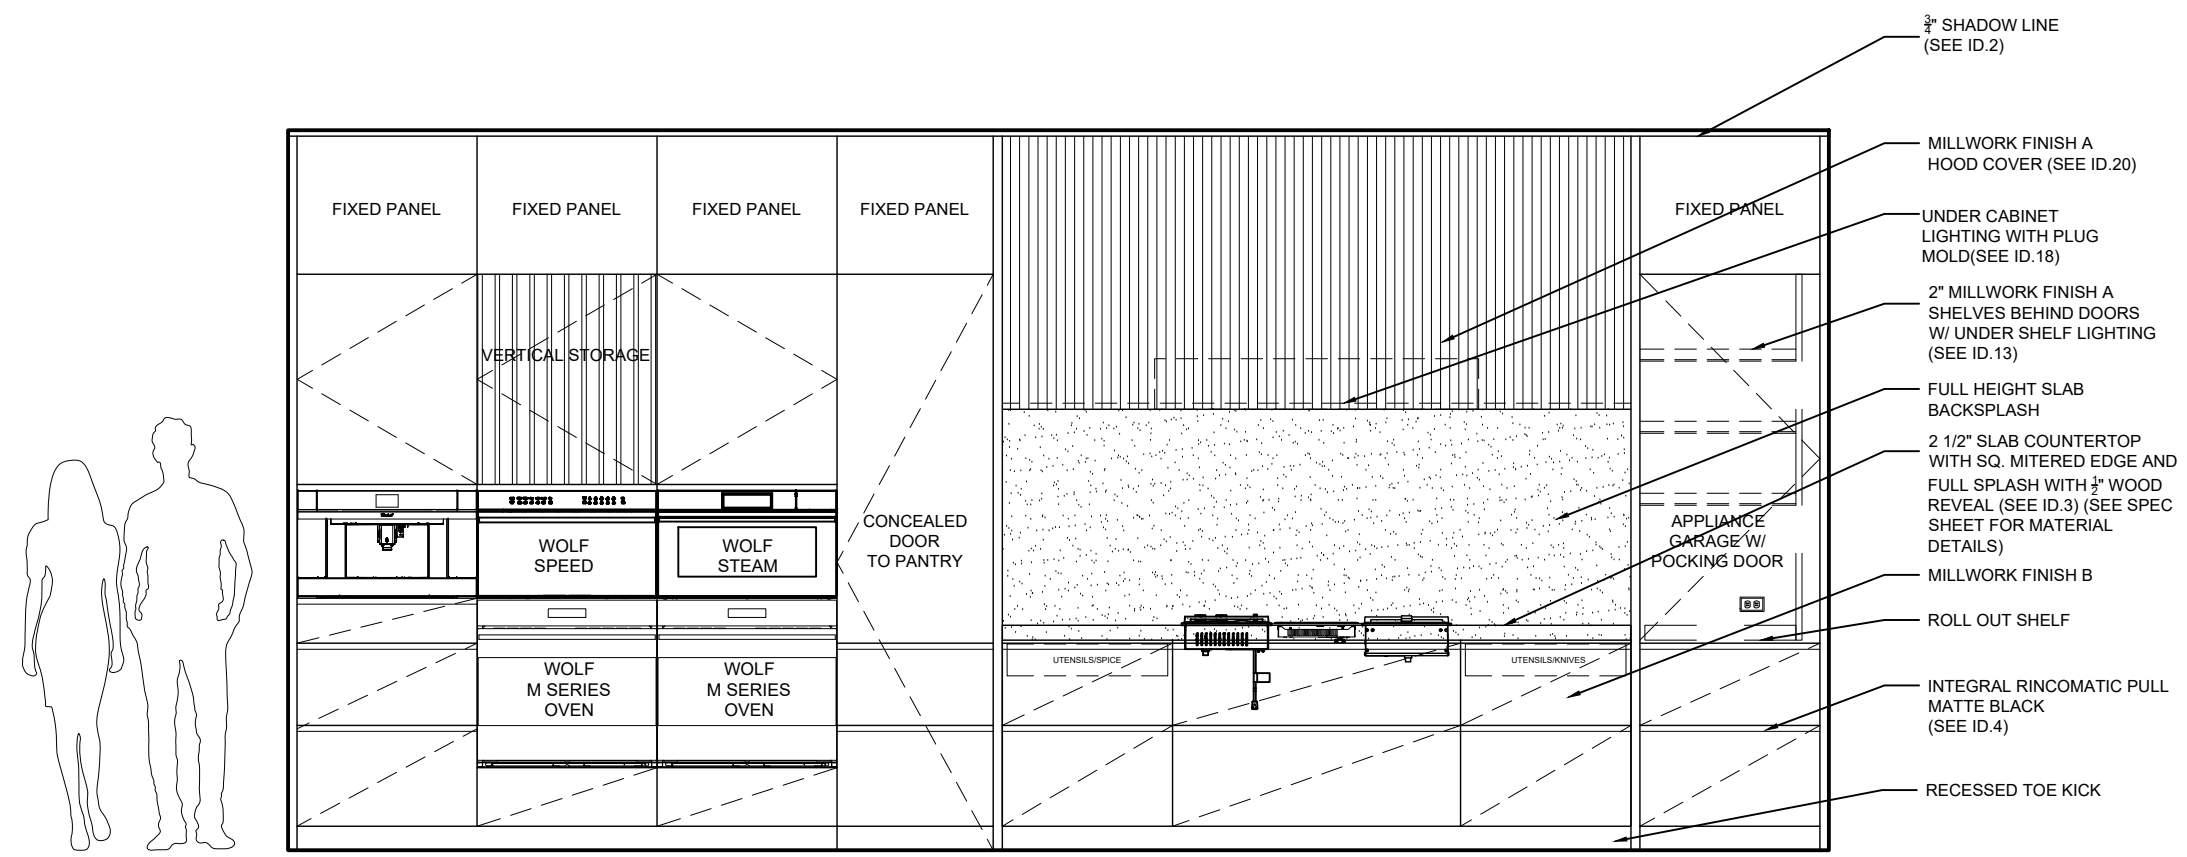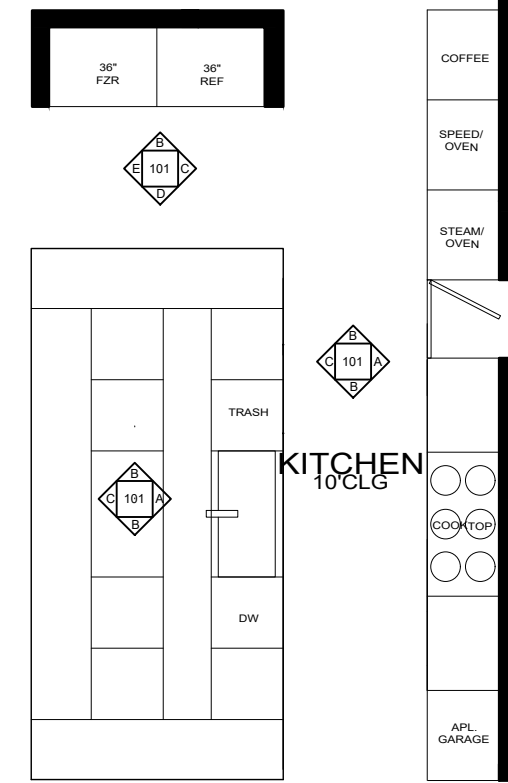

101 KITCHEN - ELEVATION A

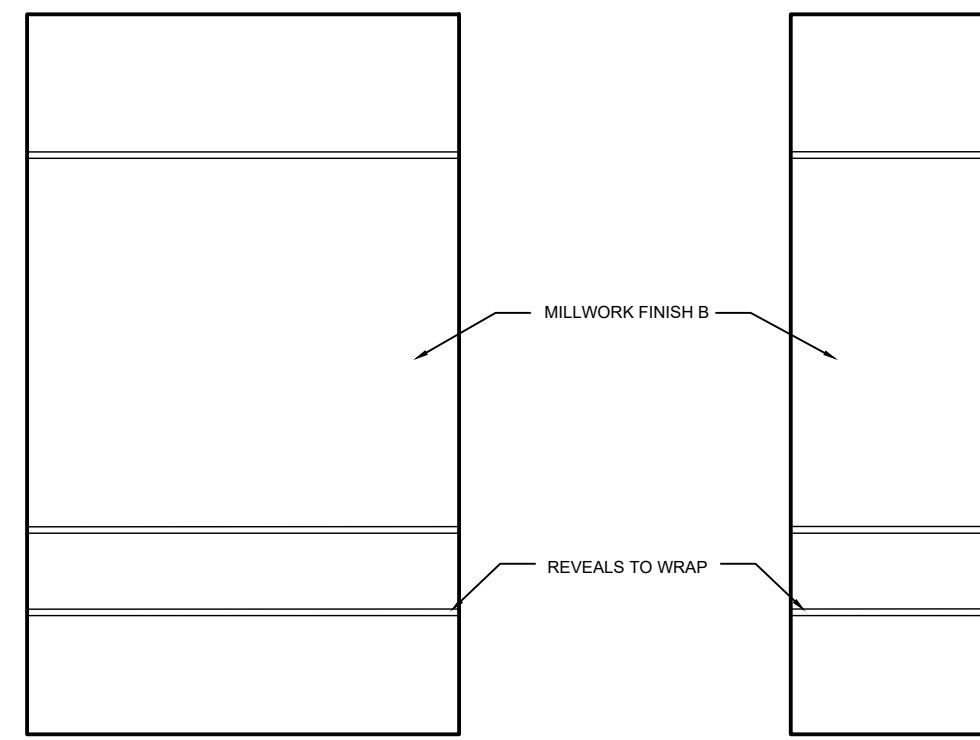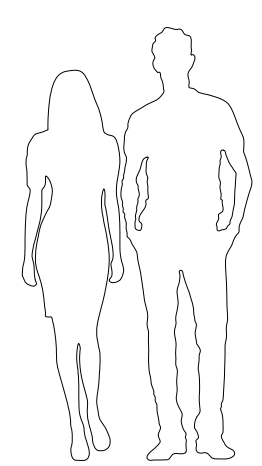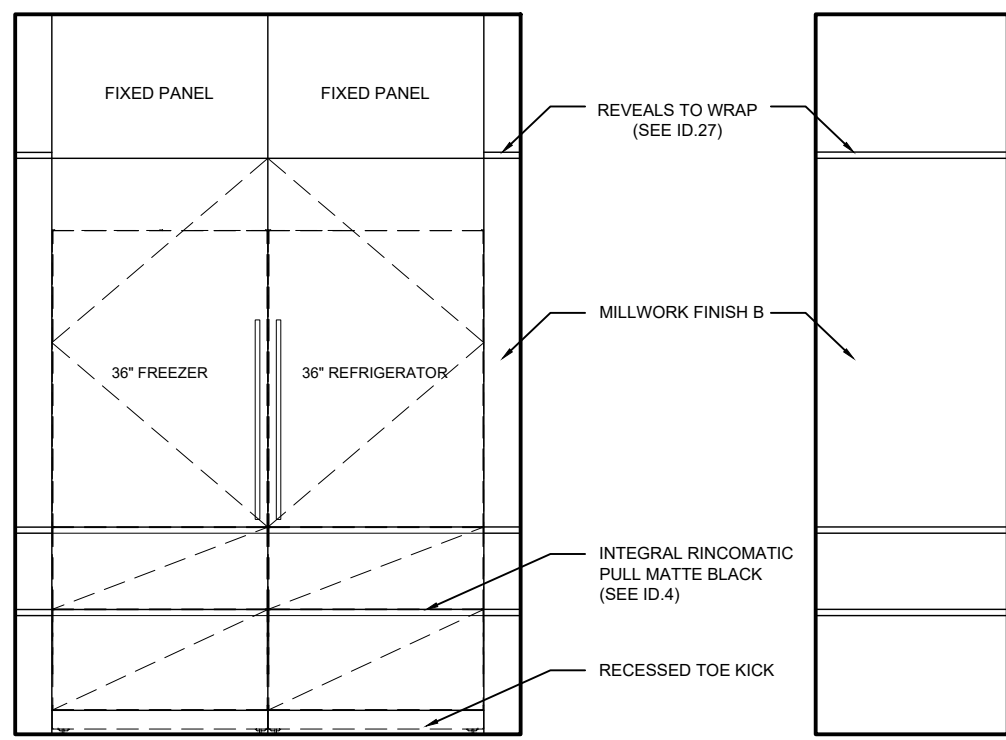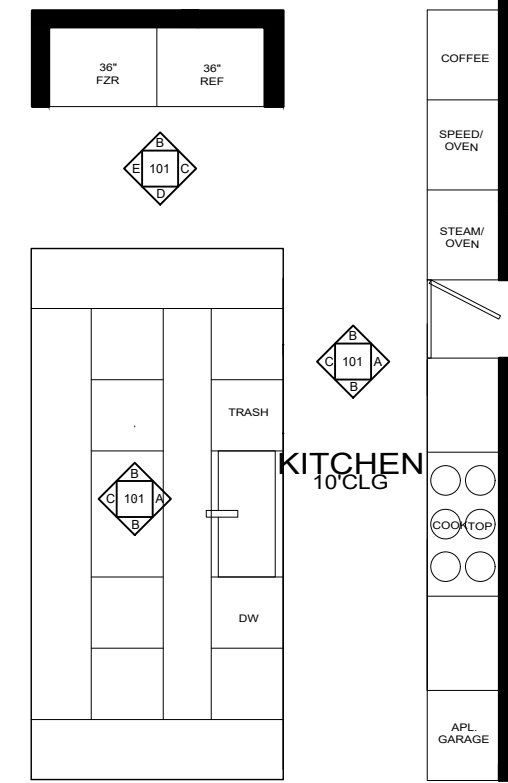



101 KITCHEN - ELEVATION B

101 KITCHEN - ELEVATION C

101 KITCHEN - ELEVATION D


101 KITCHEN - ELEVATION E



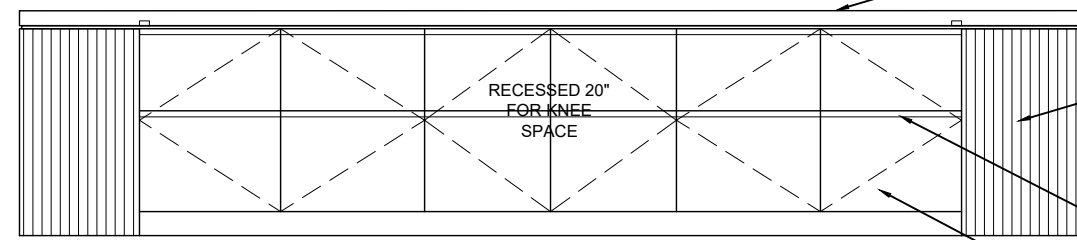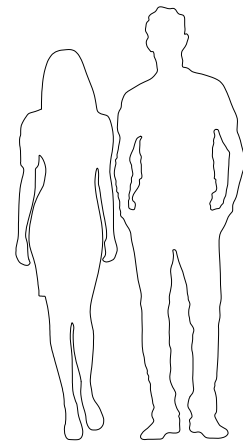


101 KITCHEN ISLAND - ELEVATION D

- 2 1/2" SLAB COUNTERTOP WITH SQ. MITERED EDGE WITH 1/2" WOOD REVEAL (SEE ID.3) (SEE SPEC SHEET FOR MATERIAL DETAILS)
- MILLWORK FINISH A
- INTEGRAL RINCOMATIC PULL MATTE BLACK (SEE ID.4)
- MILLWORK FINISH B LOWER CABINETS

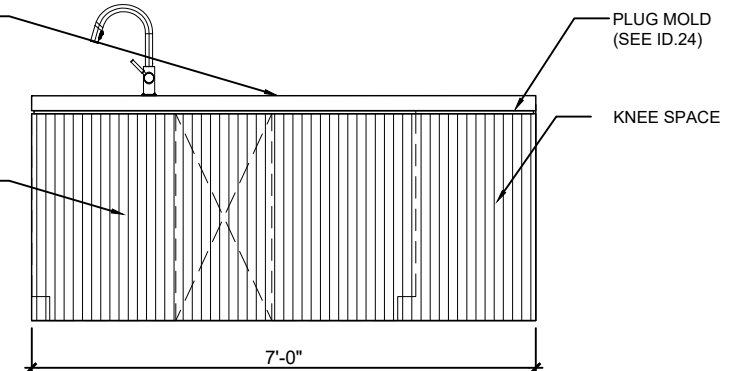


101 KITCHEN ISLAND - ELEVATION C

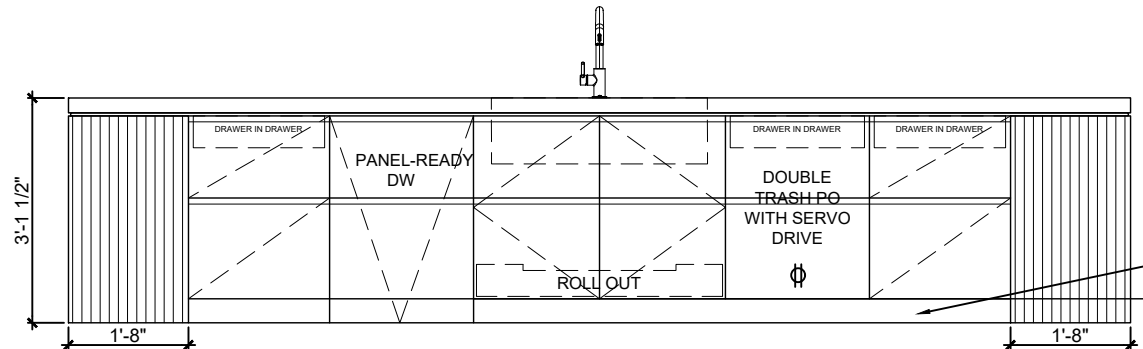





101 KITCHEN ISLAND - ELEVATION A

- 2 1/2" SLAB COUNTERTOP WITH SQ. MITERED EDGE WITH 1/2" WOOD REVEAL (SEE ID.3) (SEE SPEC SHEET FOR MATERIAL DETAILS)
- KNEE SPACE
- RECESSED TOE KICK



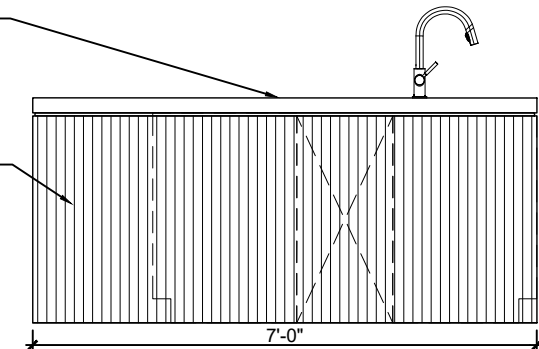


101 KITCHEN ISLAND - ELEVATION B

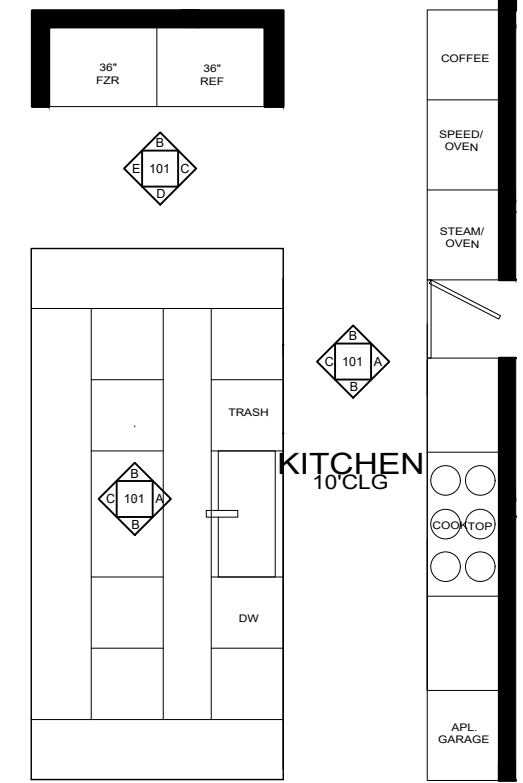

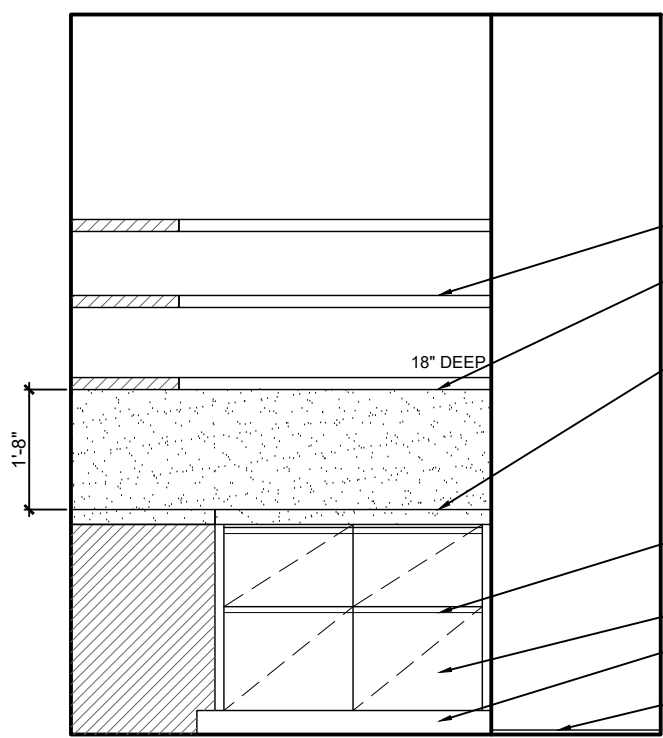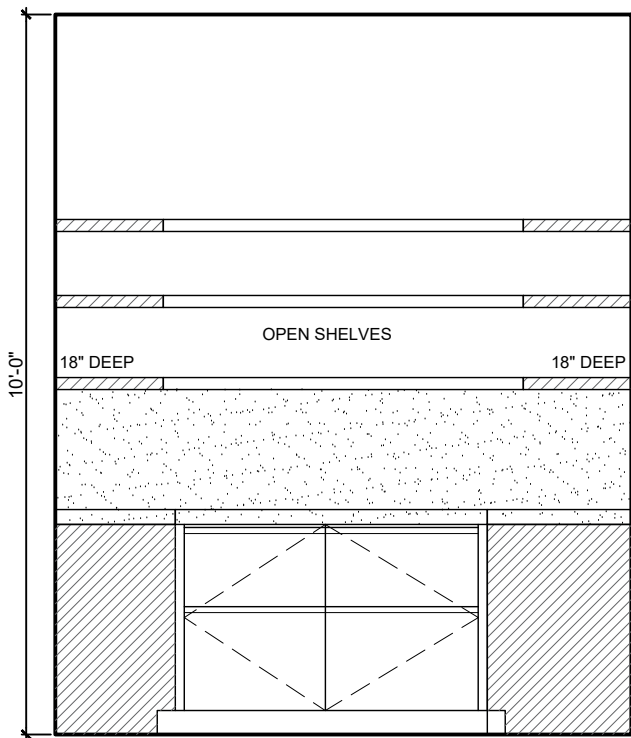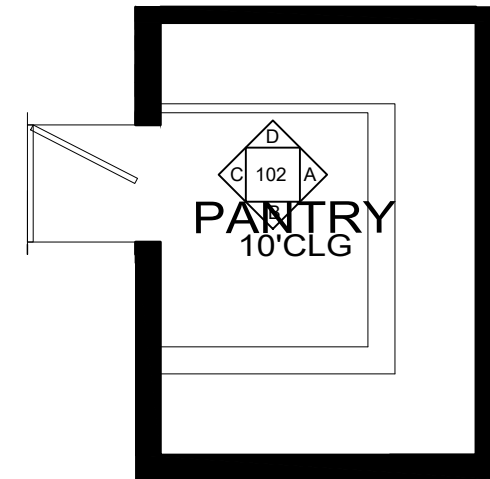

- 2" THICK MILLWORK FINISH A SHELVES
- WOOD SHELF WITH LIGHTING AND PLUG MOLD (SEE ID.14)
- 2 1/2" SLAB COUNTERTOP WITH SQUARE MITERED EDGE AND FULL SPLASH WITH 1/2" WOOD REVEAL (SEE ID.3) (SEE SPEC SHEET FOR MATERIAL DETAILS)
- INTEGRAL RINCOMATIC PULL MATTE BLACK (SEE ID.4)
- MILLWORK FINISH B
- RECESSED TOE KICK
- 3/4" REGLET RECESSED BASE (SEE ID.1)

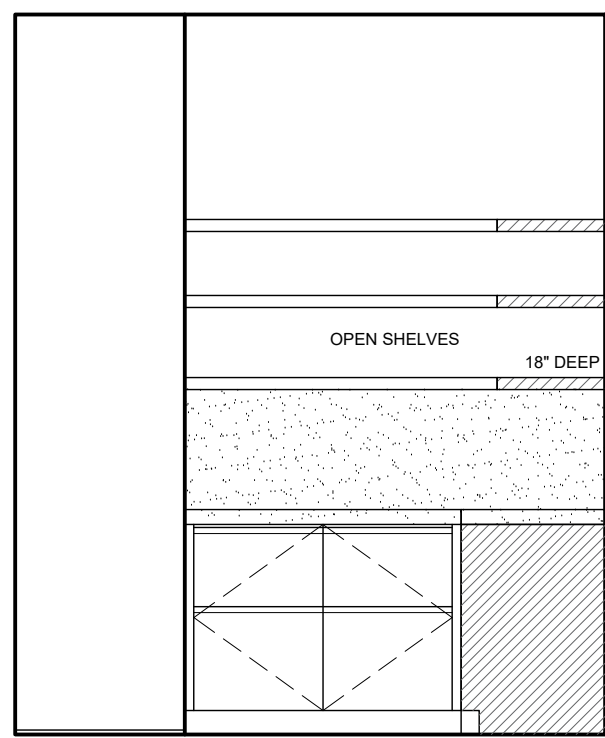
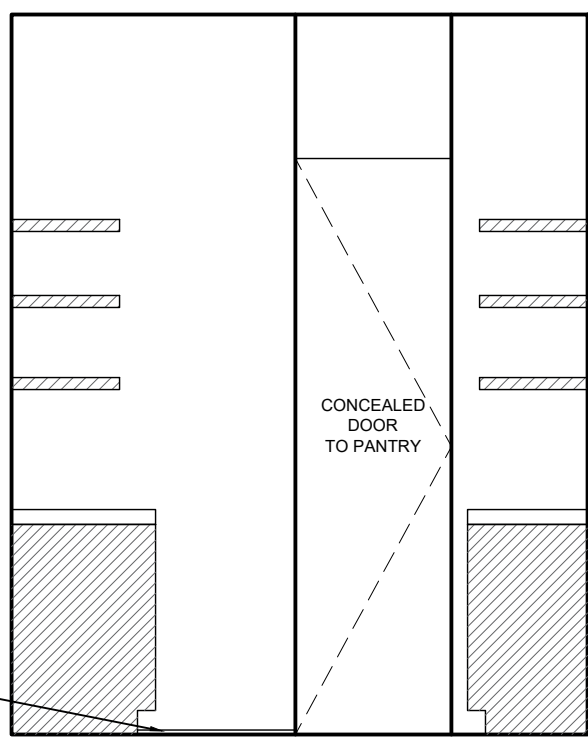


102 PANTRY - ELEVATION A

102 PANTRY - ELEVATION B



102 PANTRY - ELEVATION C

102 PANTRY - ELEVATION D

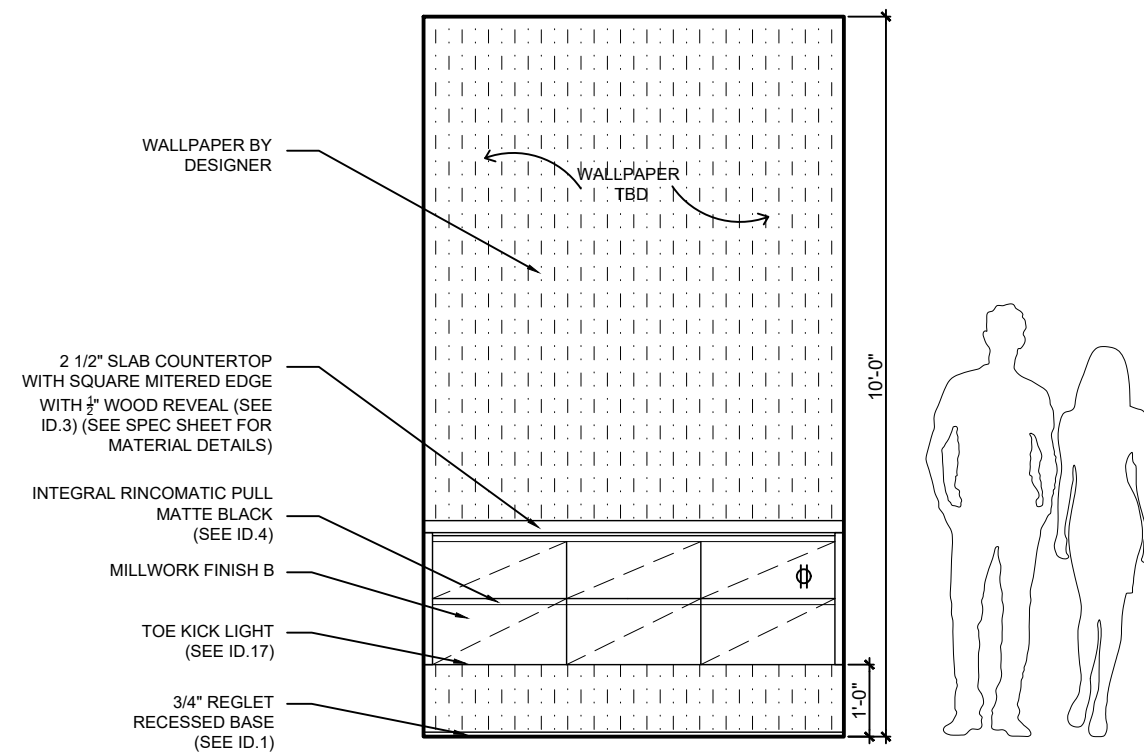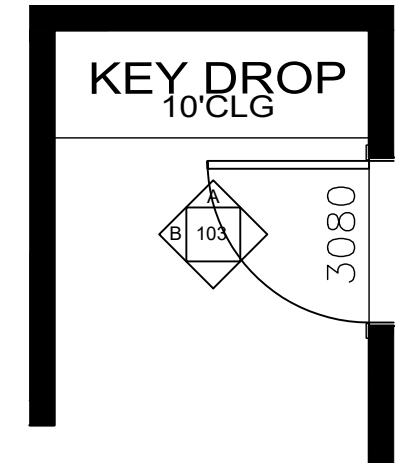


103 KEY DROP - ELEVATION A





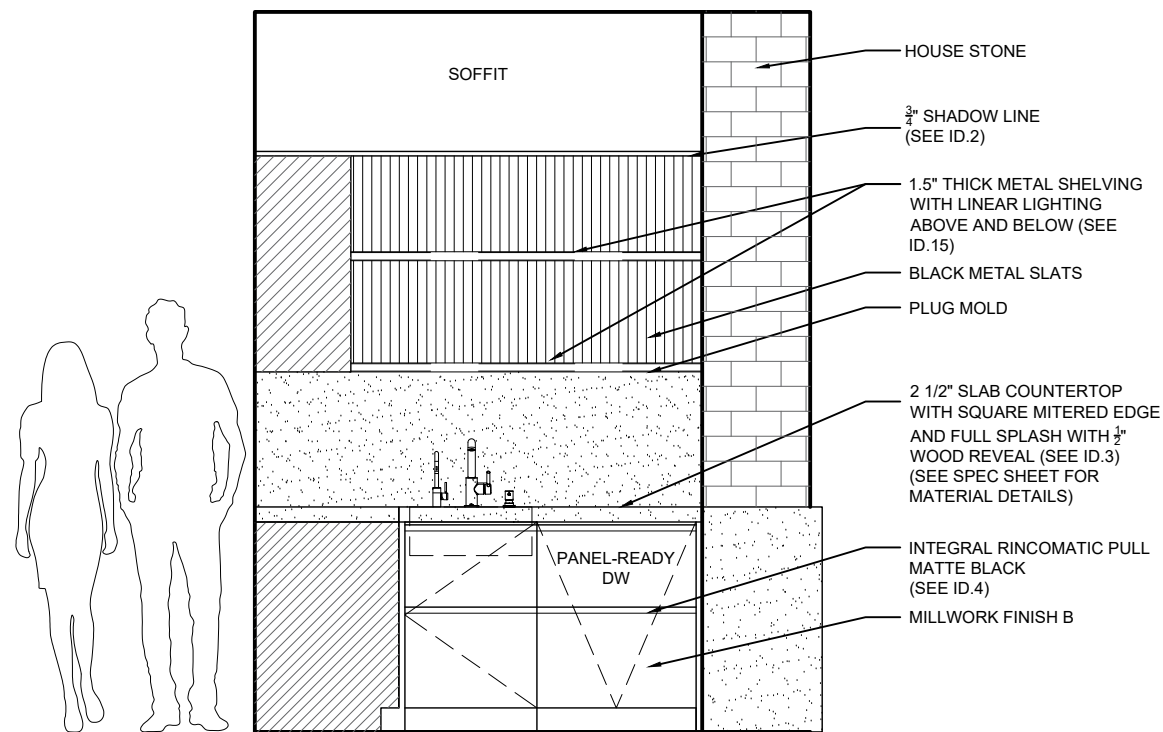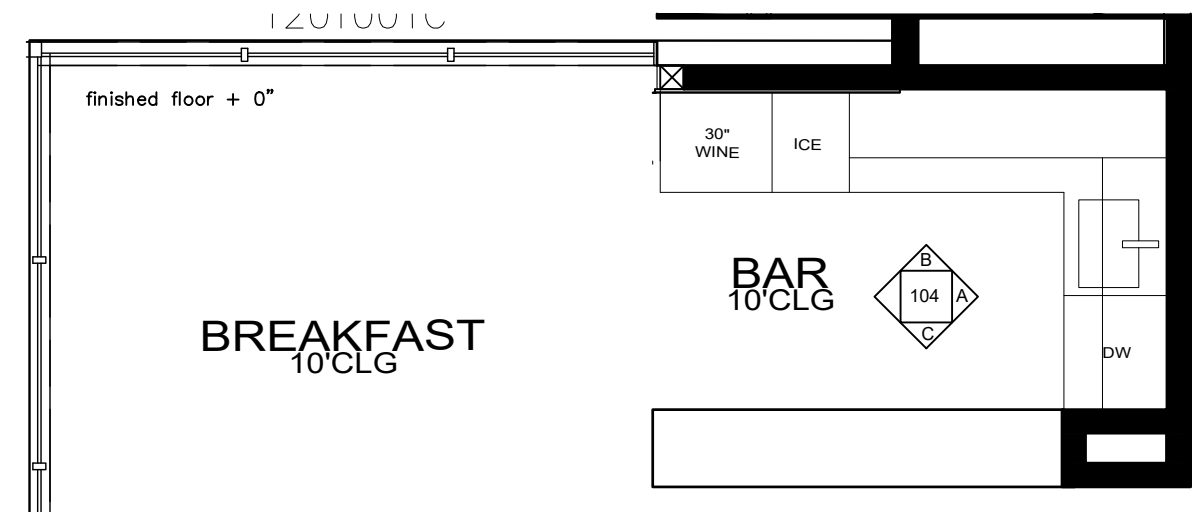

104 BAR - ELEVATION A

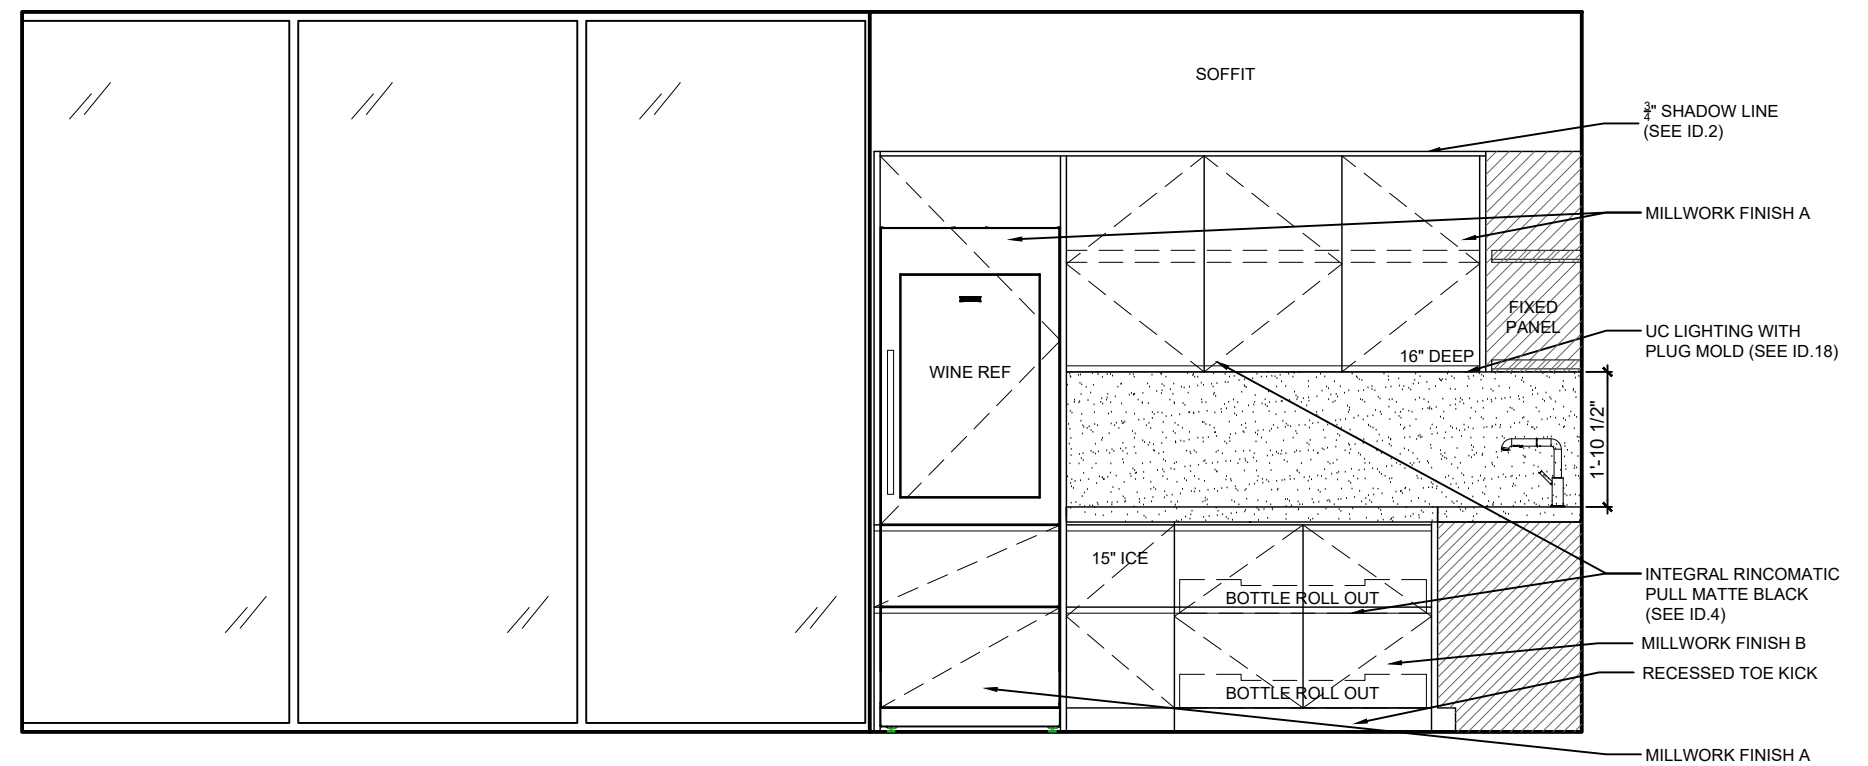


104 BAR - ELEVATION B

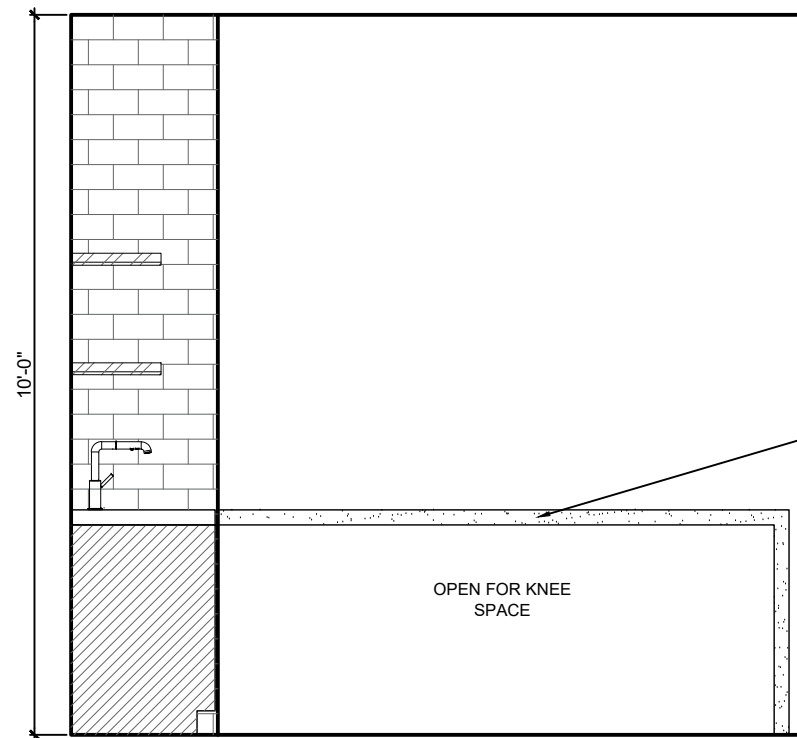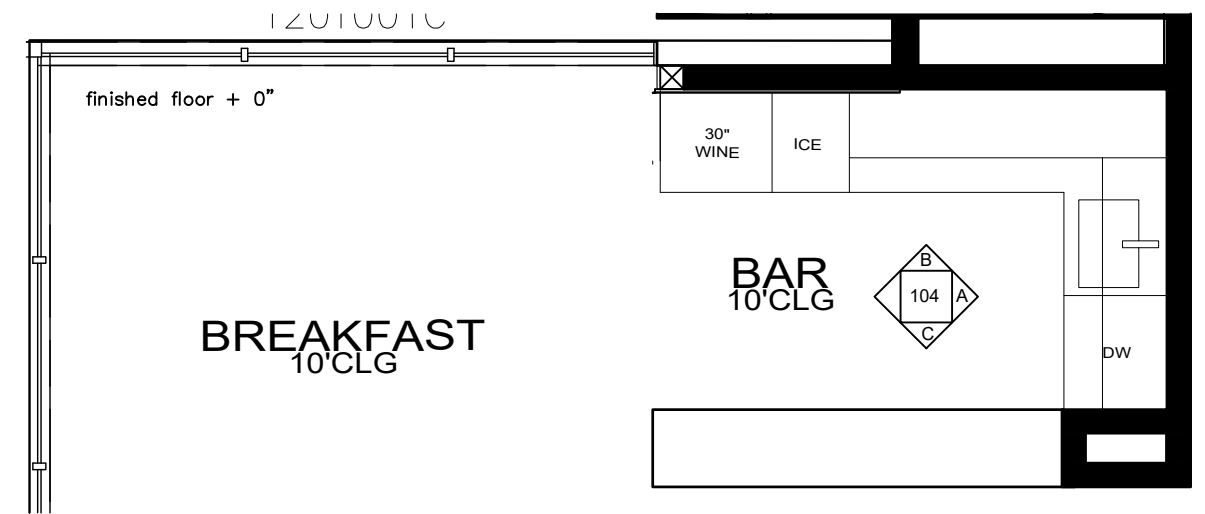



104 BAR - ELEVATION C

2.5" SQUARE MITERED EDGE  
COUNTERTOP, WATERFALL  
EDGE SLAB  
(SEE SPEC SHEET FOR  
MATERIAL DETAILS)

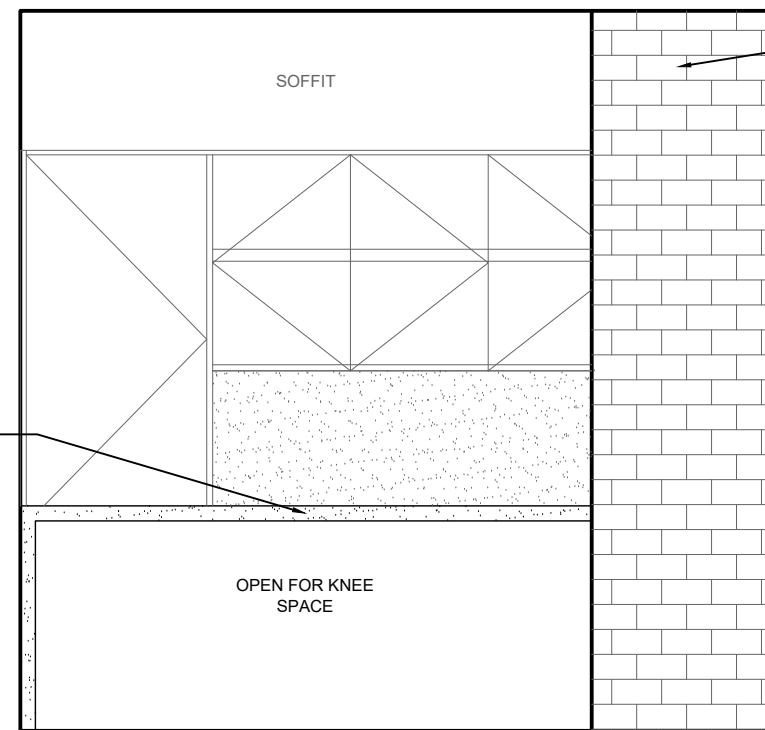


104 BAR - ELEVATION D



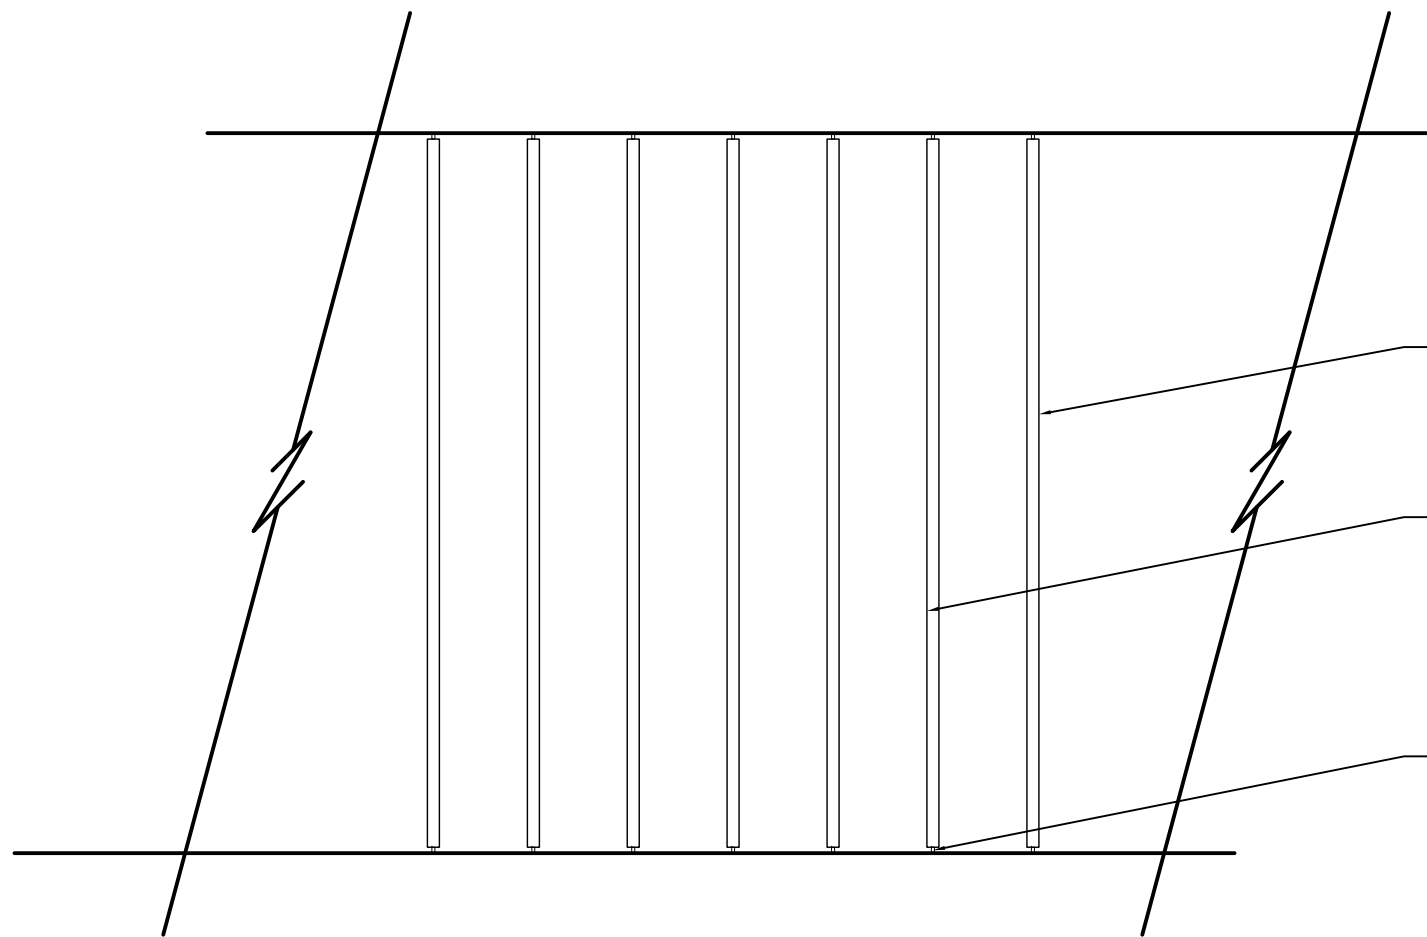

105 Foyer - Elevation A


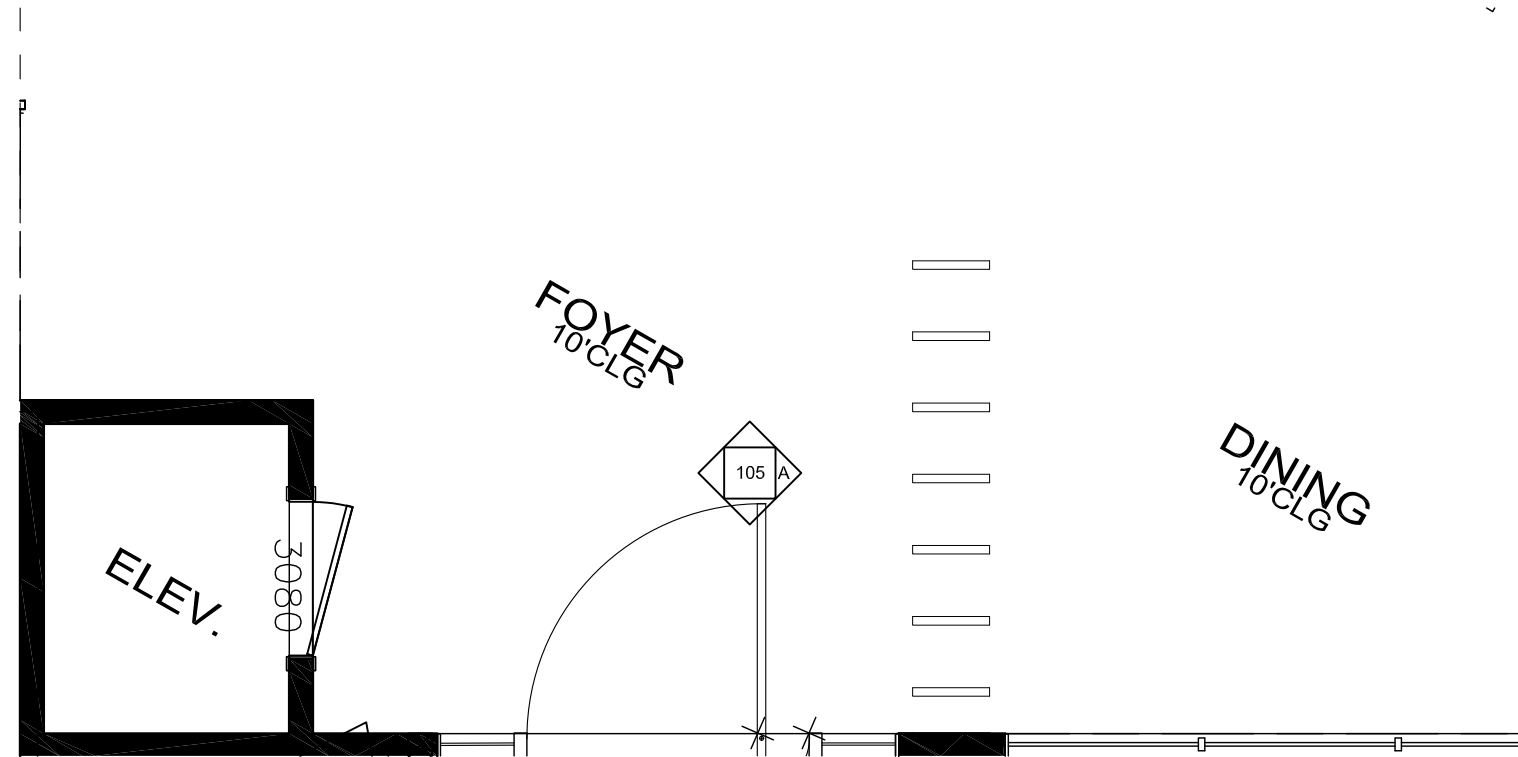


PIVOTING MILLWORK  
PANELS TO ACT AS  
ROOM DIVIDER

MILLWORK FINISH A


PIVOT MECHANISM AT  
LID AND FLOOR





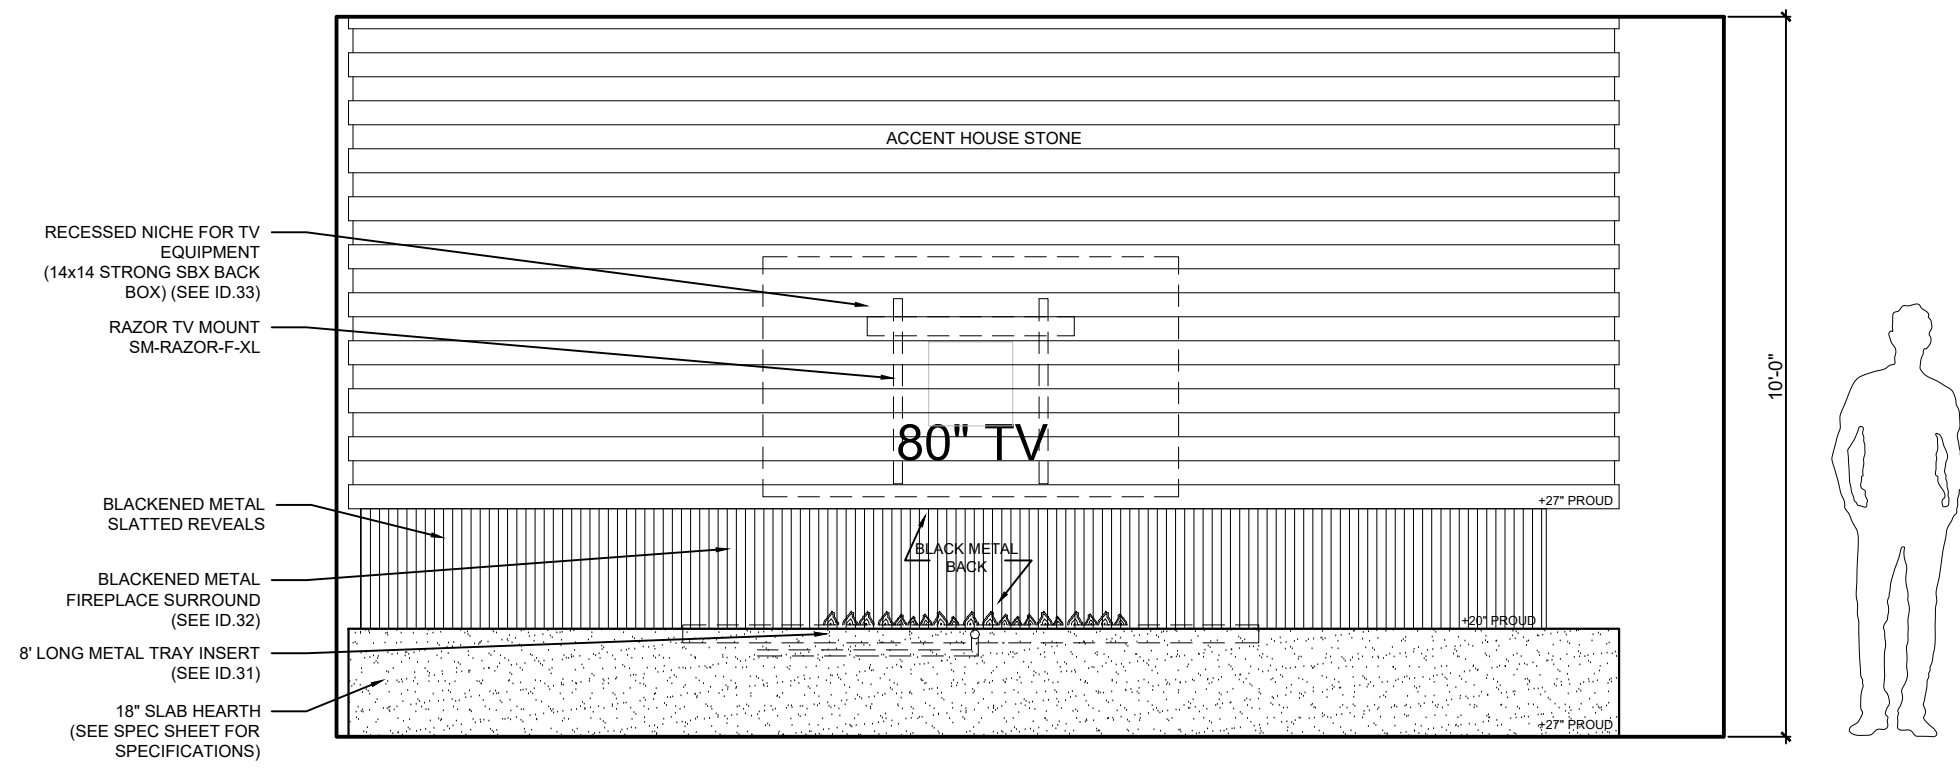
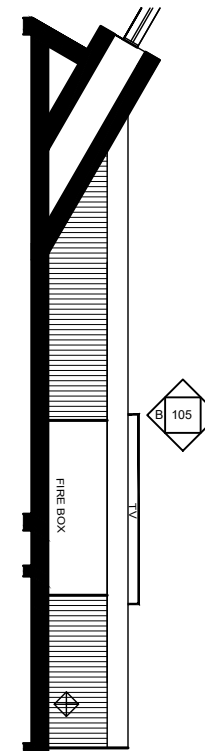


- RECESSED NICHE FOR TV EQUIPMENT (14x14 STRONG SBX BACK BOX) (SEE ID.33)
- RAZOR TV MOUNT SM-RAZOR-F-XL
- BLACKENED METAL SLATTED REVEALS
- BLACKENED METAL FIREPLACE SURROUND (SEE ID.32)
- 8' LONG METAL TRAY INSERT (SEE ID.31)
- 18" SLAB HEARTH (SEE SPEC SHEET FOR SPECIFICATIONS)

10'-0"






105 GREAT ROOM - ELEVATION B

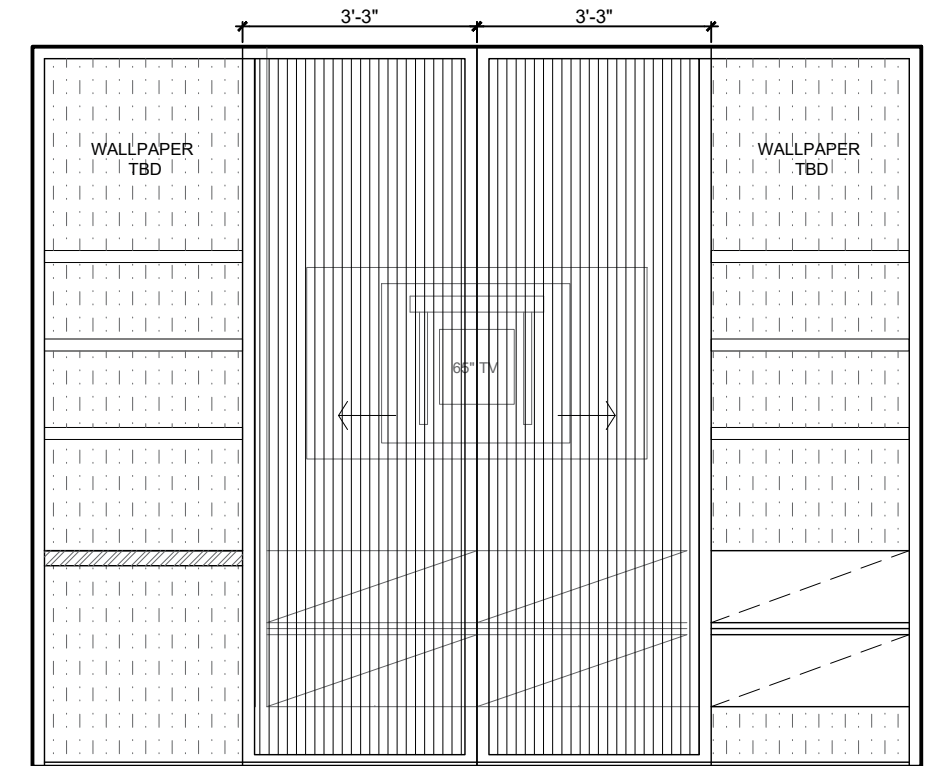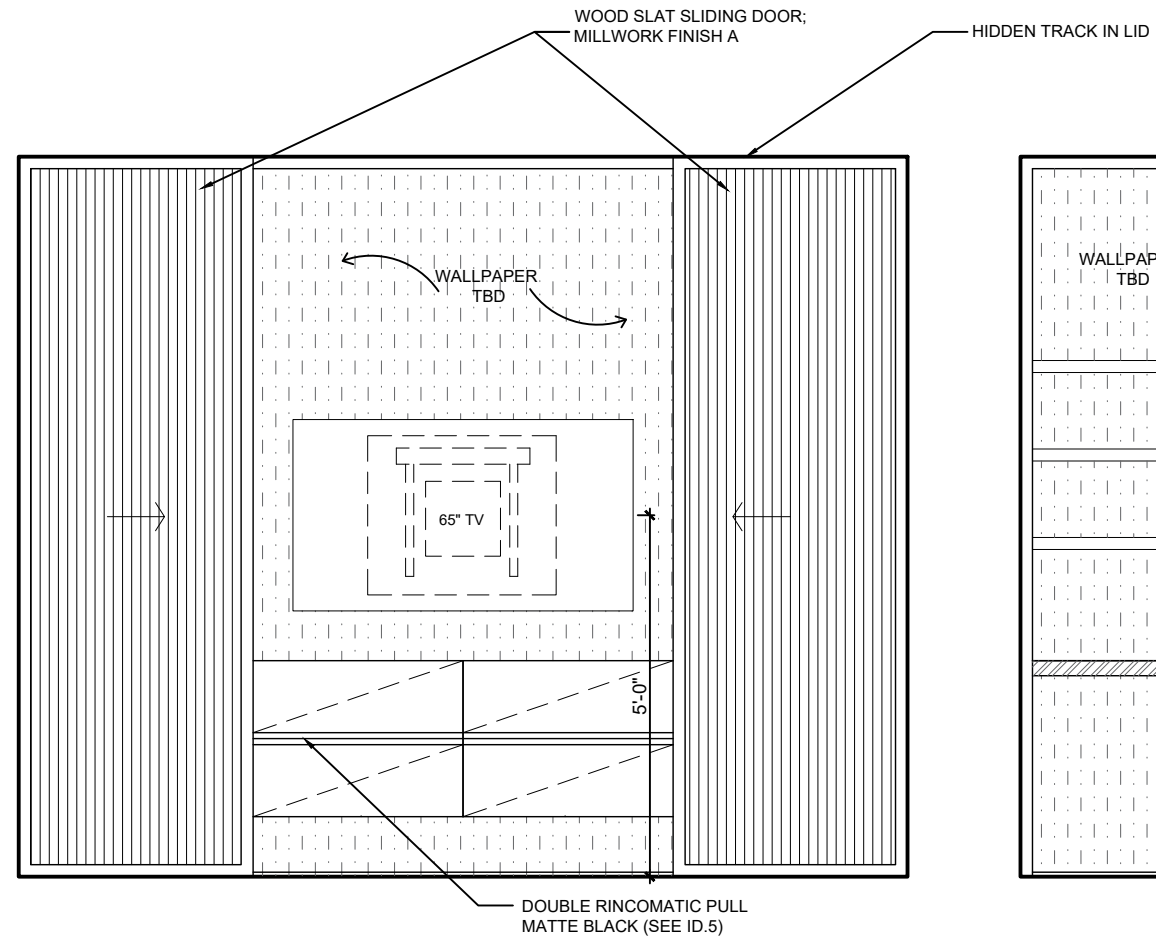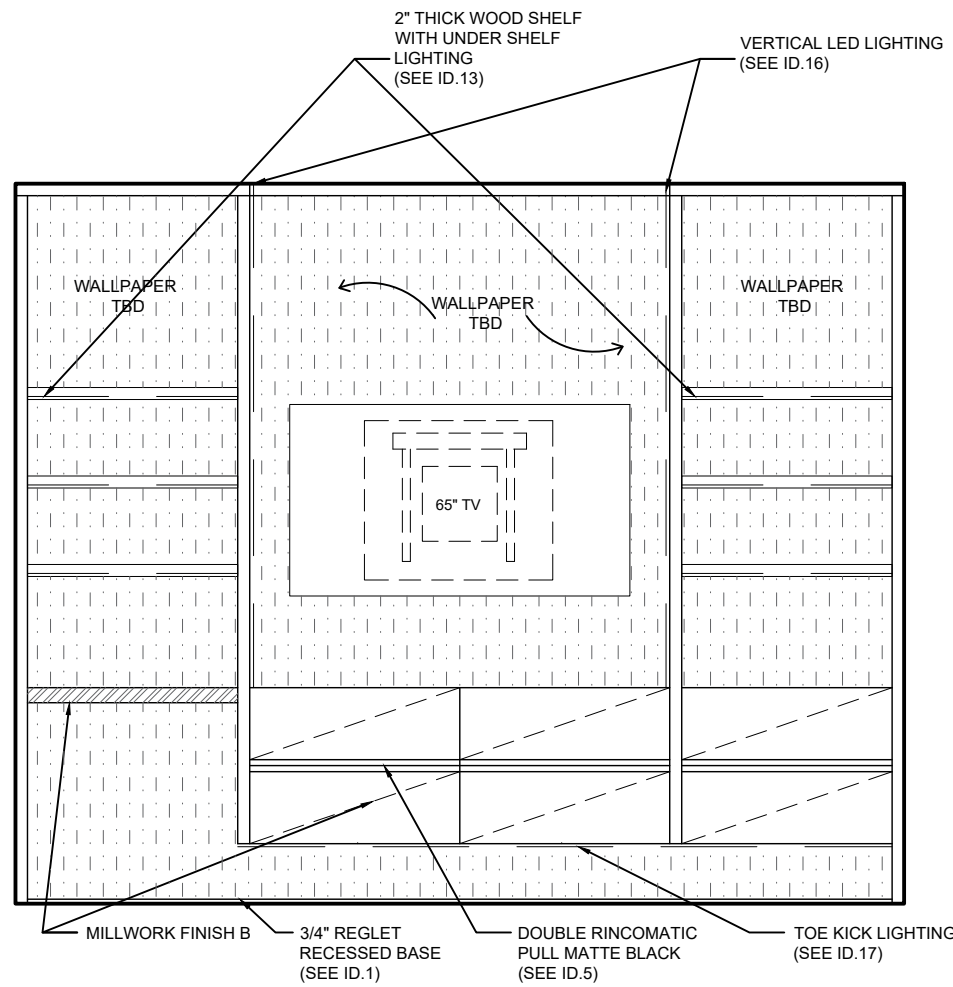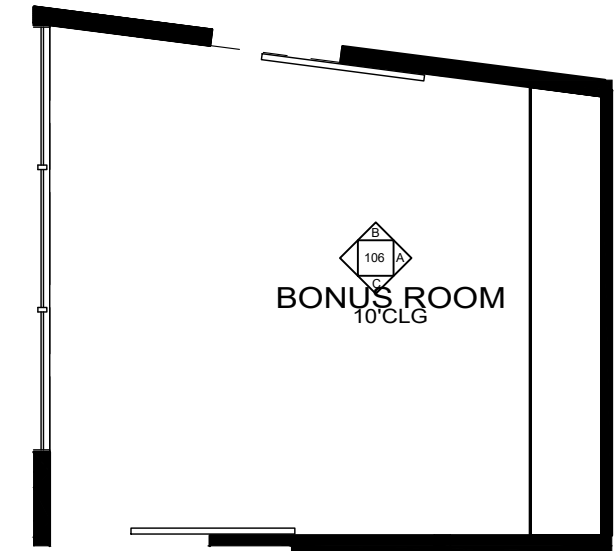

106 BONUS ROOM (OPEN) - ELEVATION A

106 BONUS ROOM (OPEN) - ELEVATION A




106 BONUS ROOM (CLOSED) - ELEVATION A

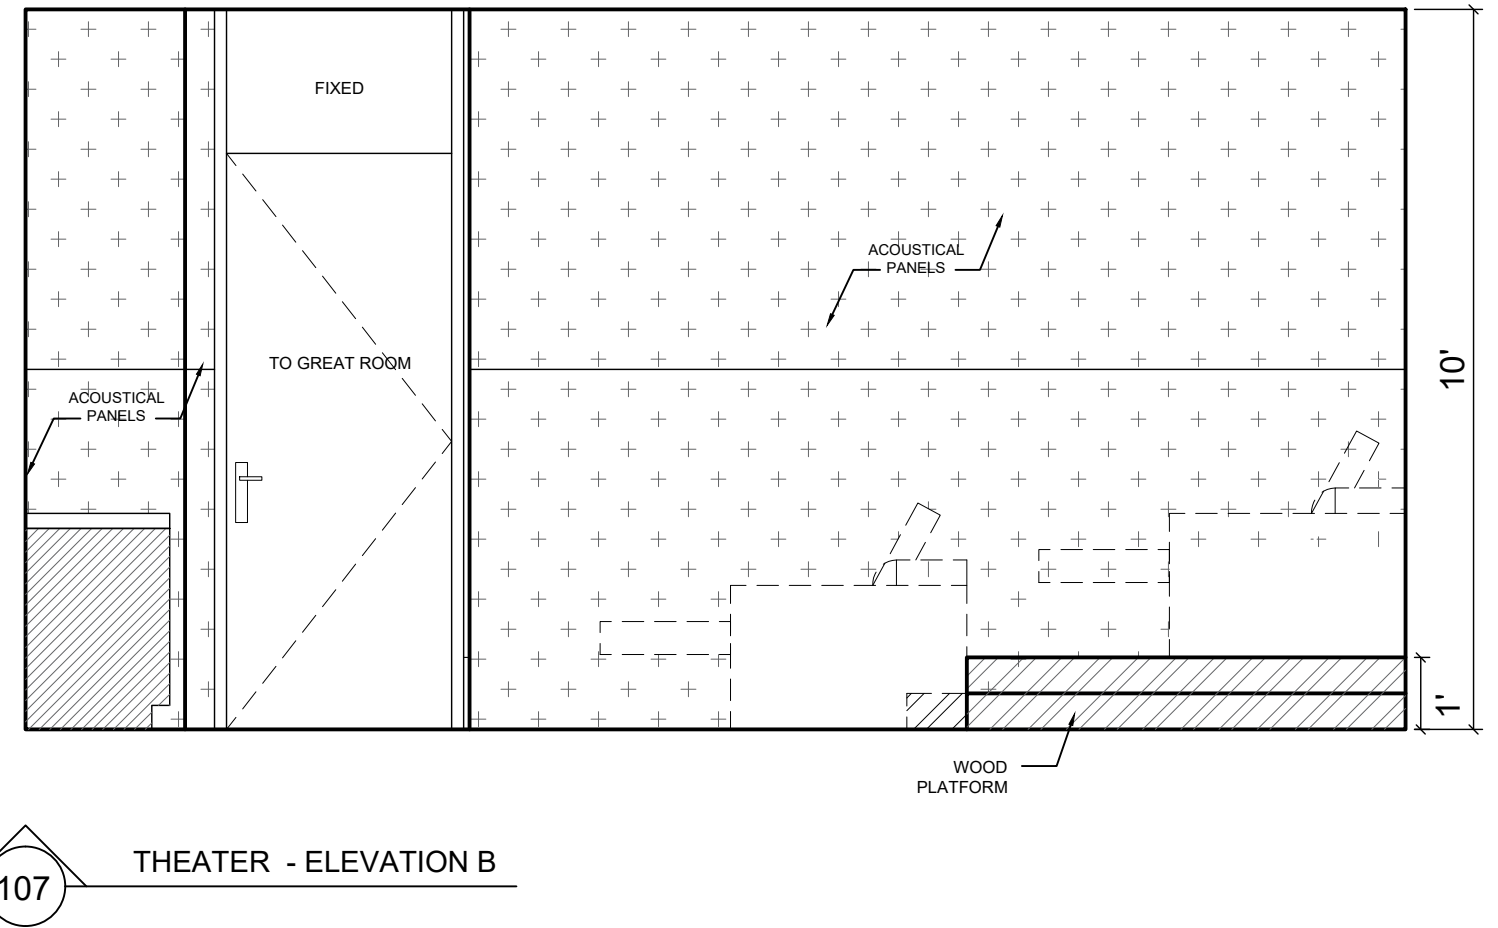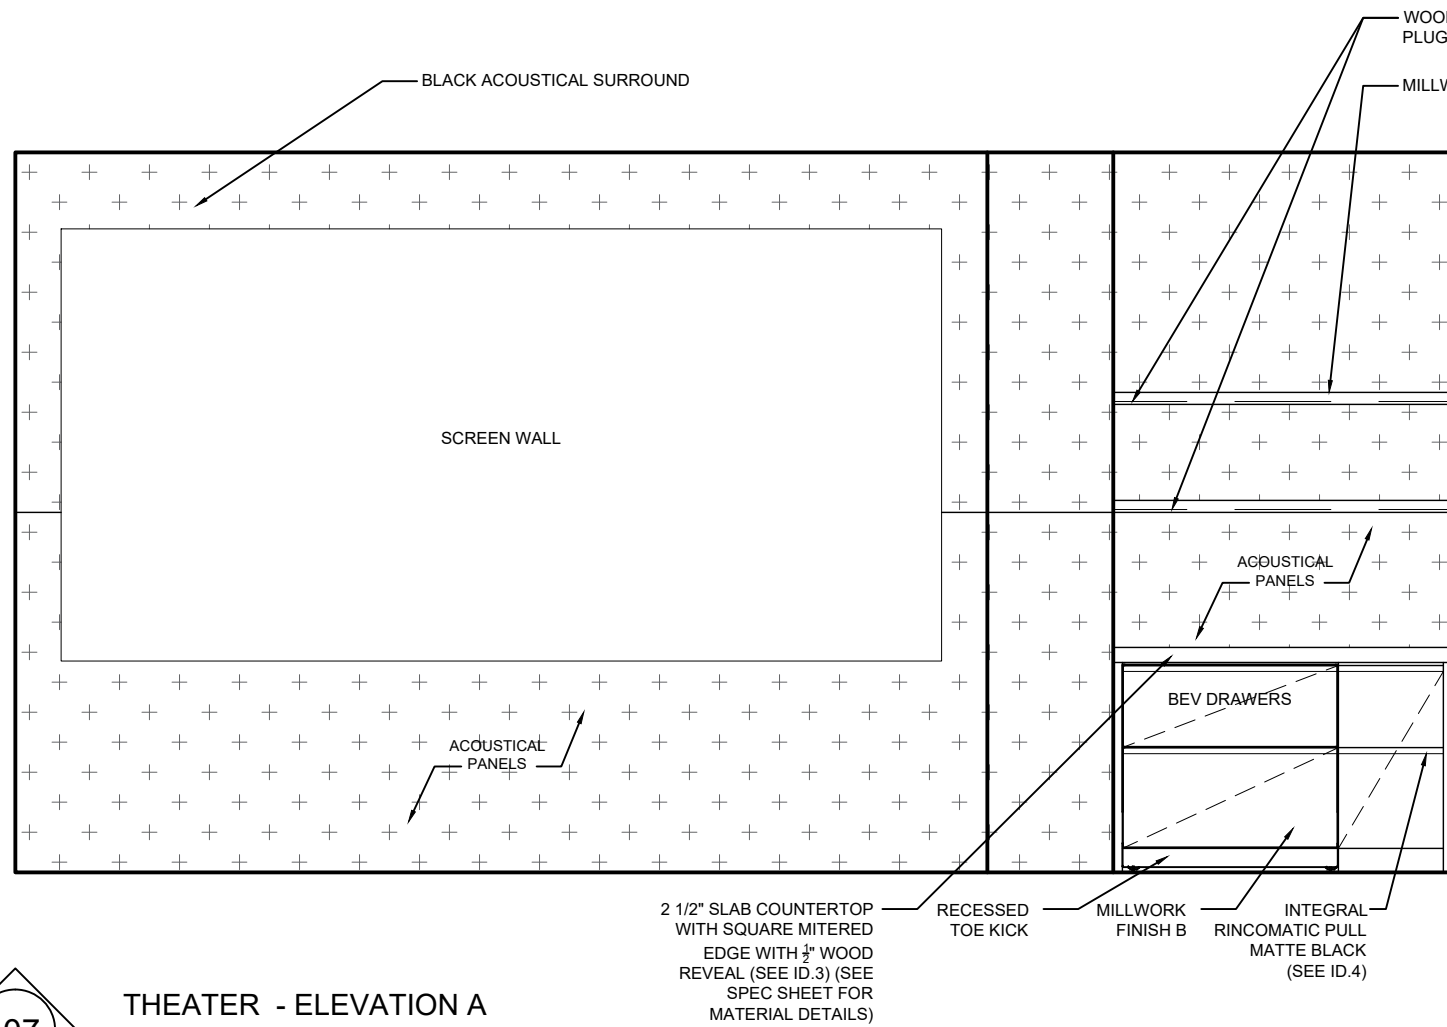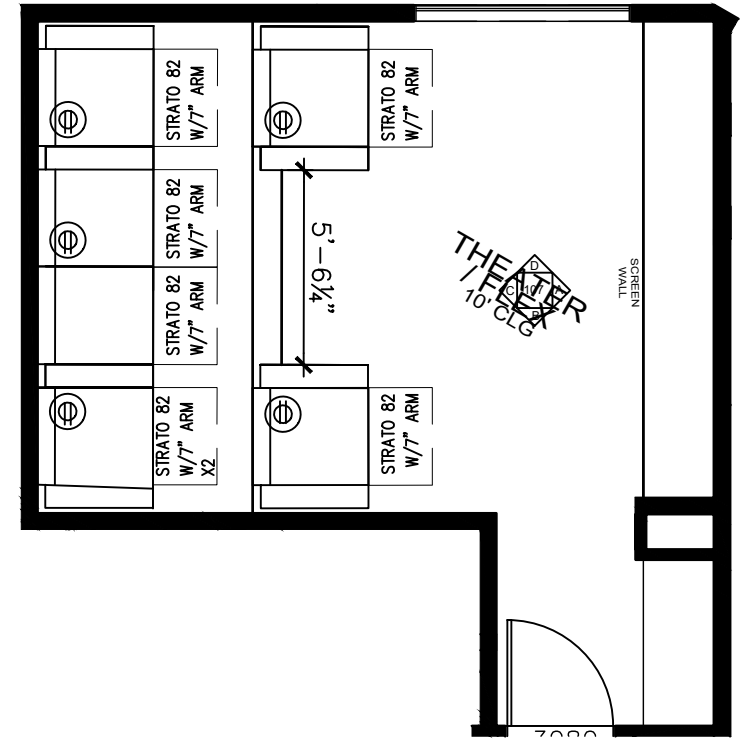

107 THEATER - ELEVATION A







107 THEATER - ELEVATION B



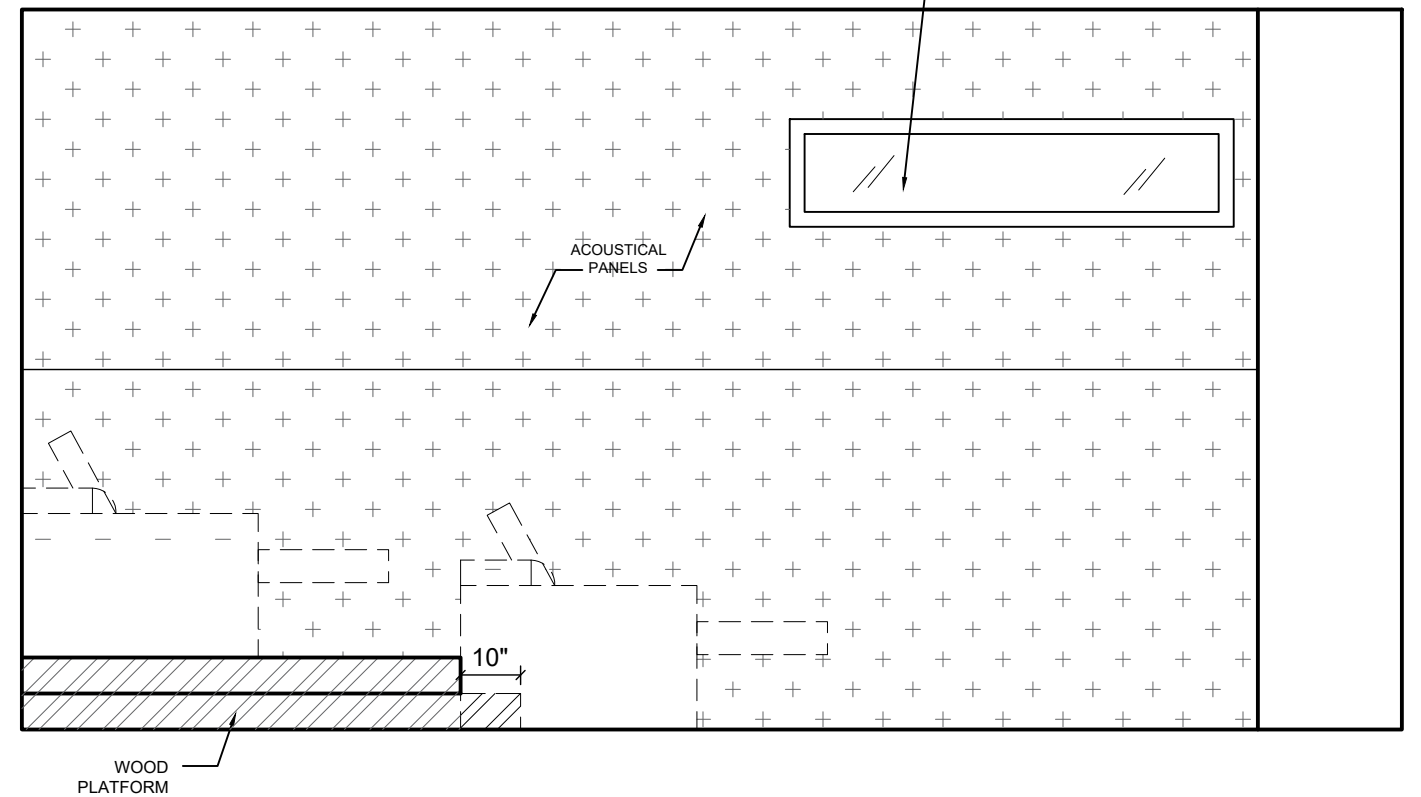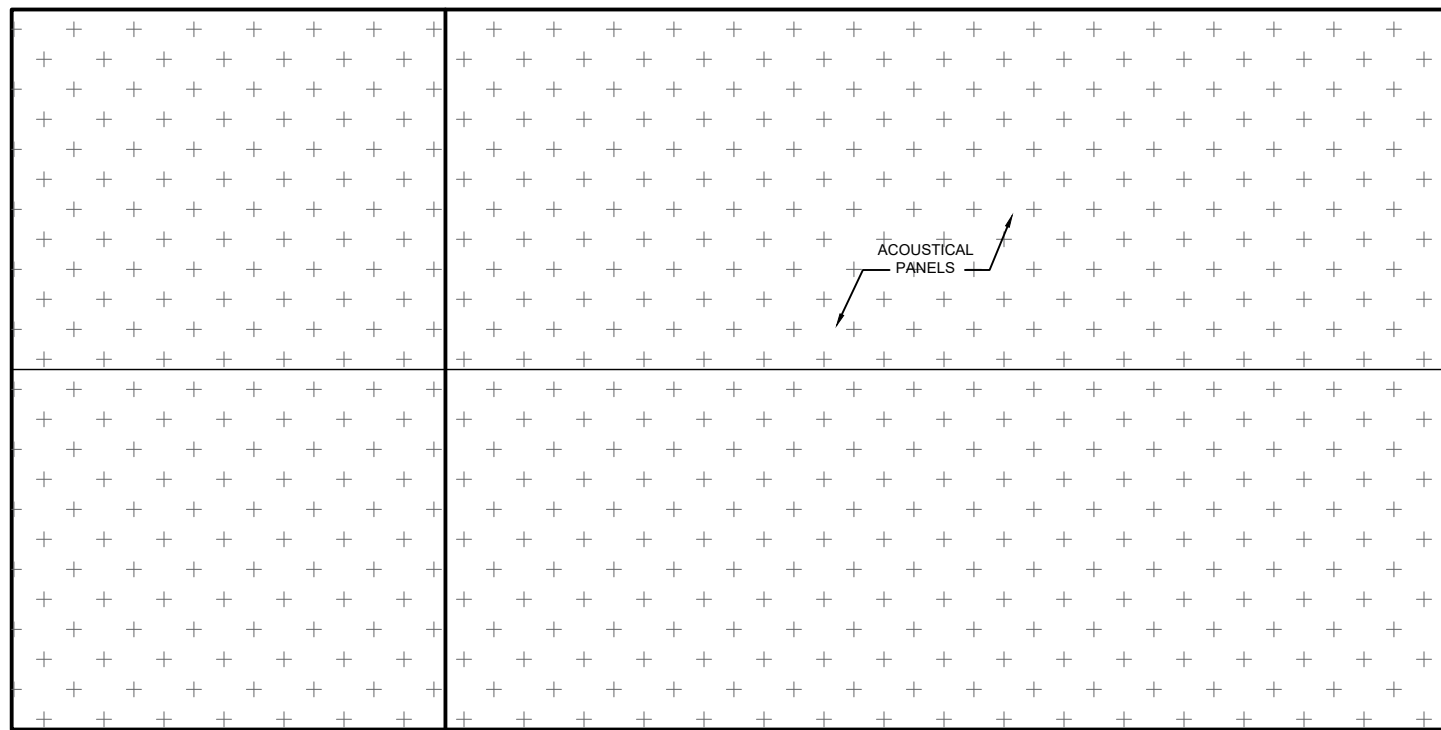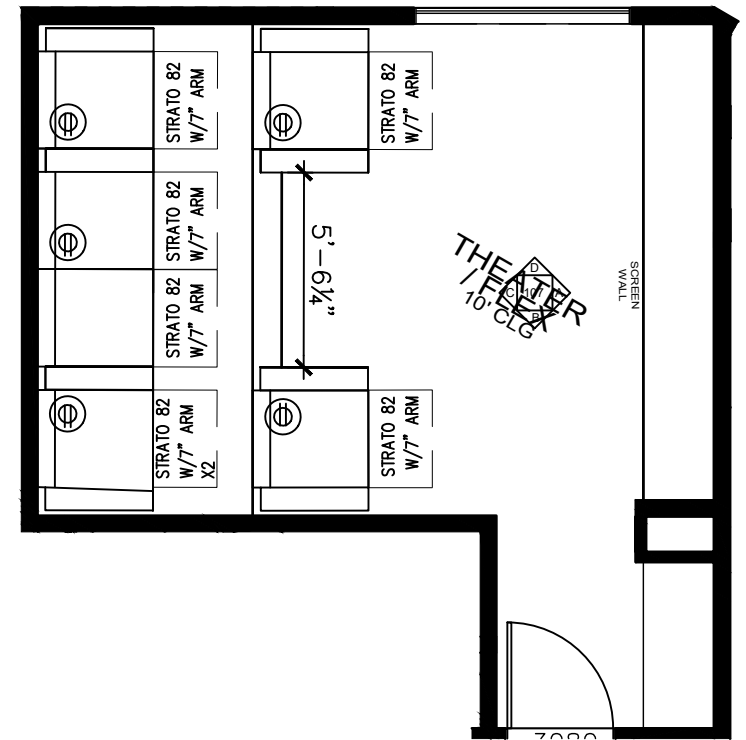

107 THEATER - ELEVATION C

107 THEATER - ELEVATION D

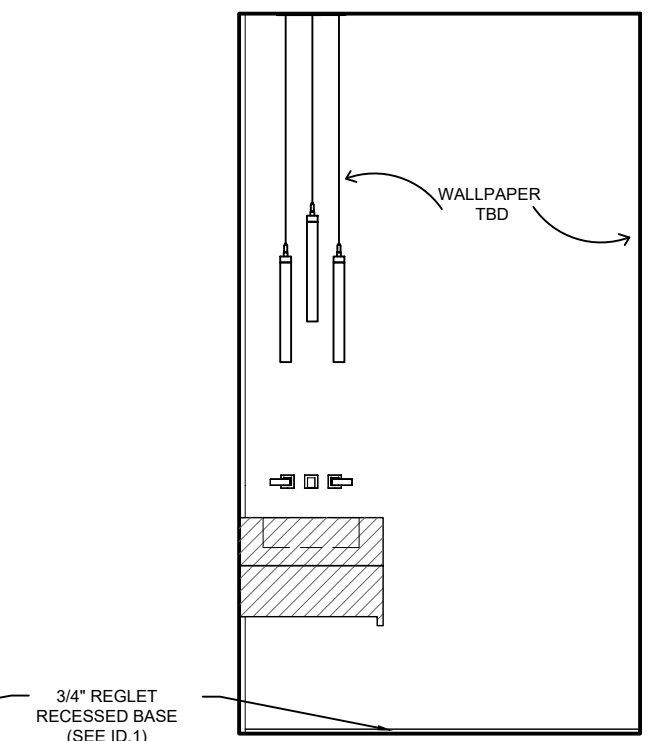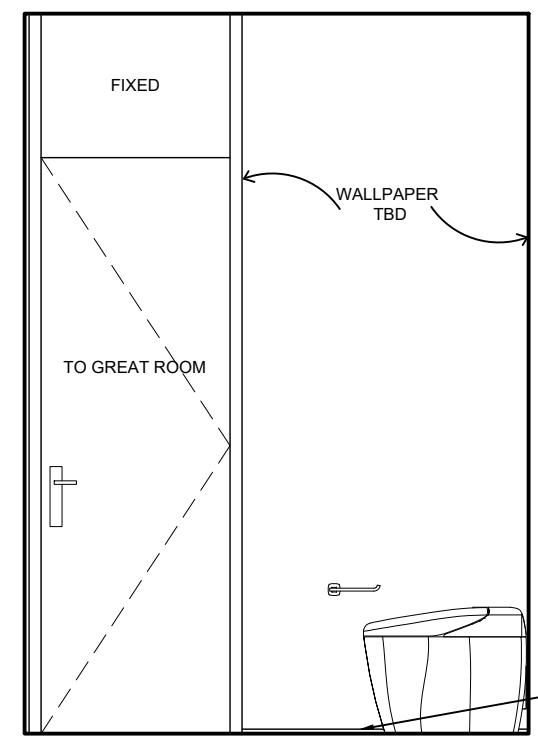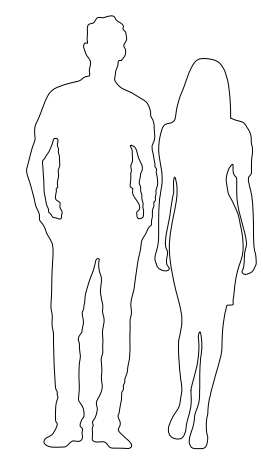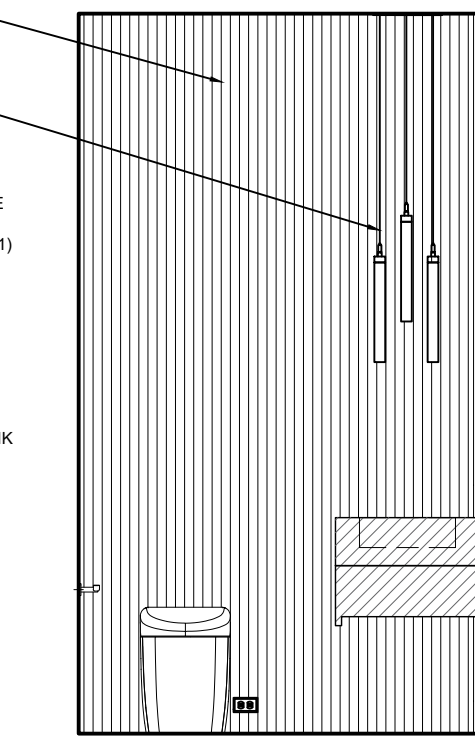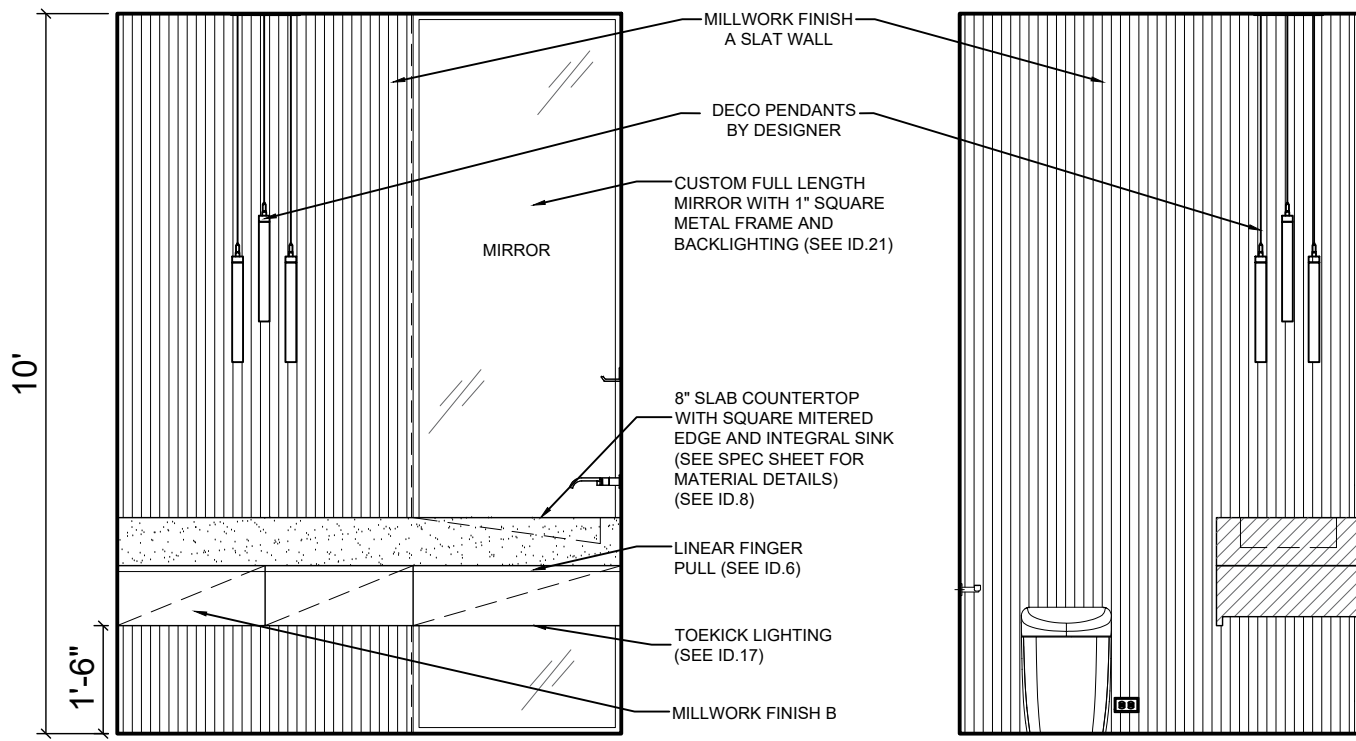
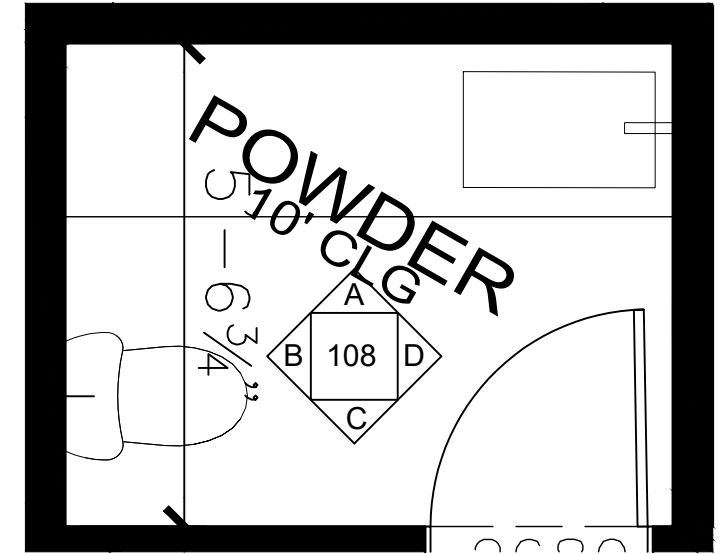


108 POWDER - ELEVATION A

108 POWDER - ELEVATION B



108 POWDER - ELEVATION C

108 POWDER - ELEVATION D

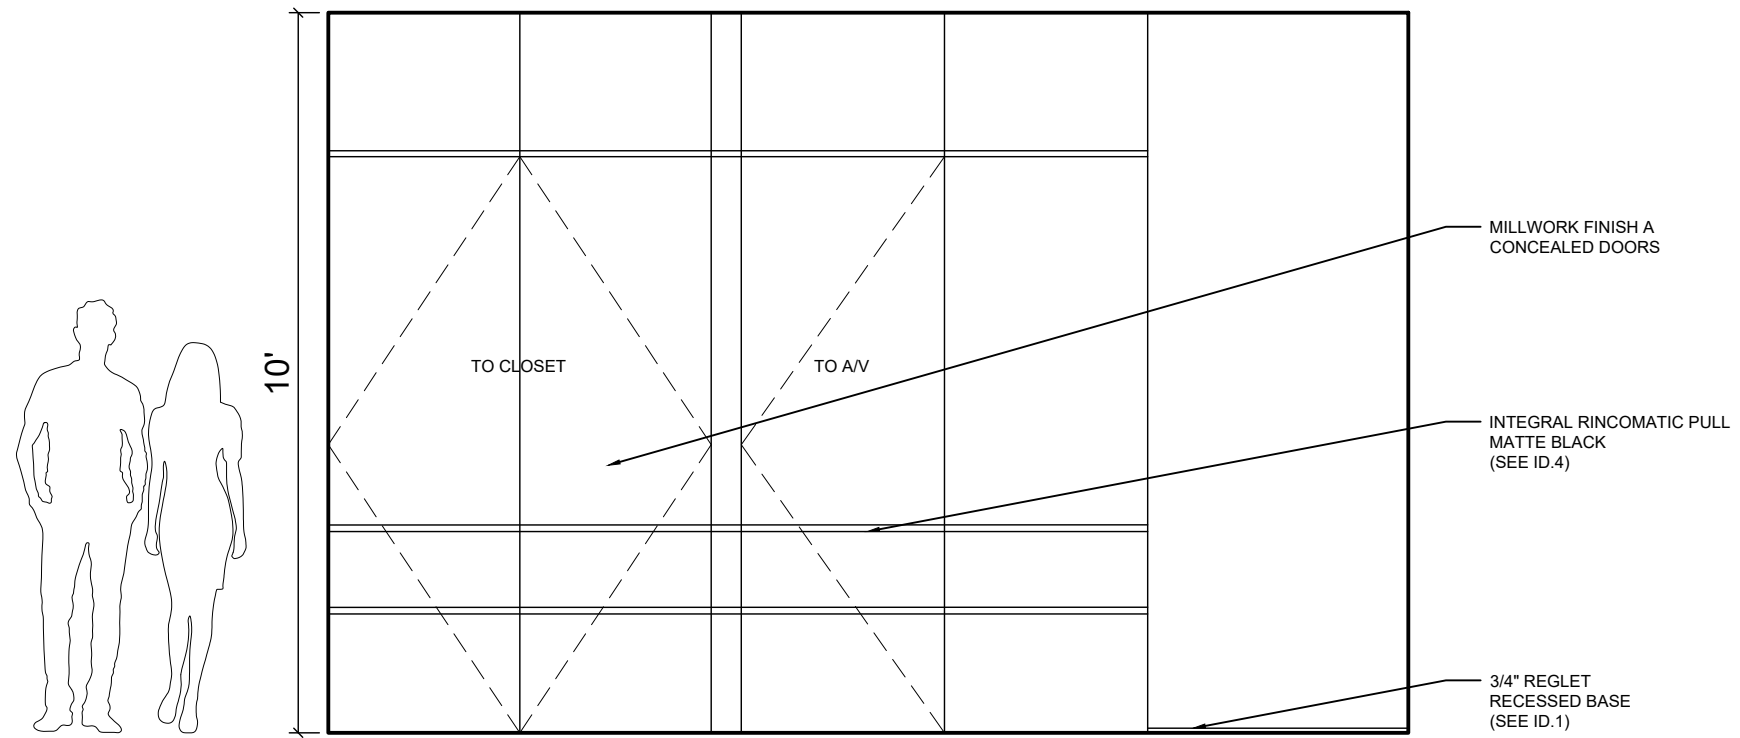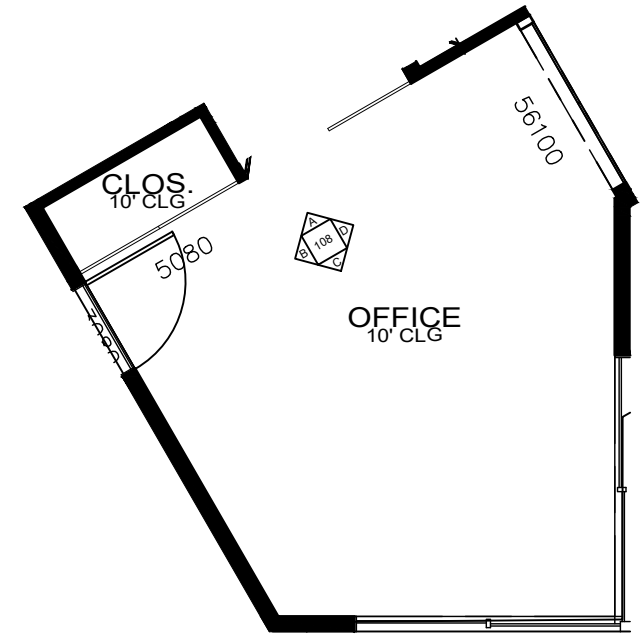


109 OFFICE - ELEVATION A




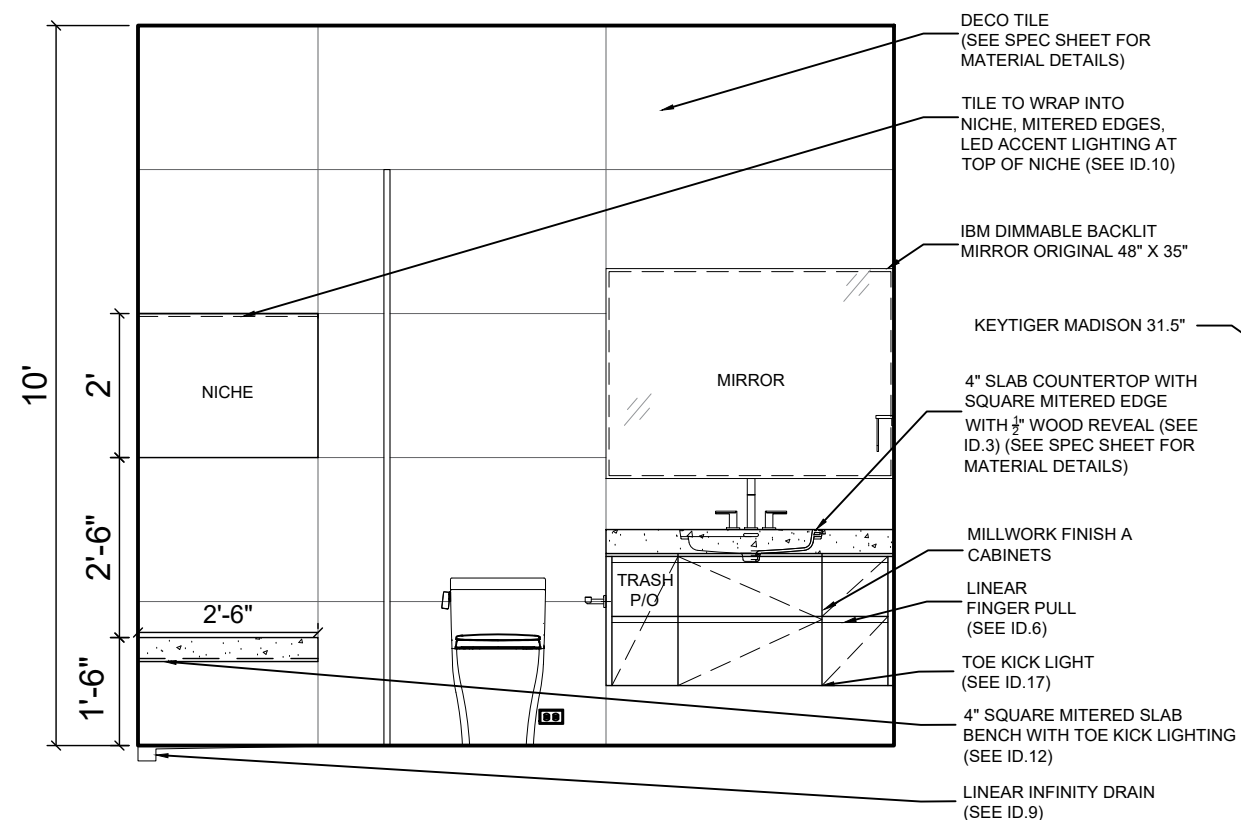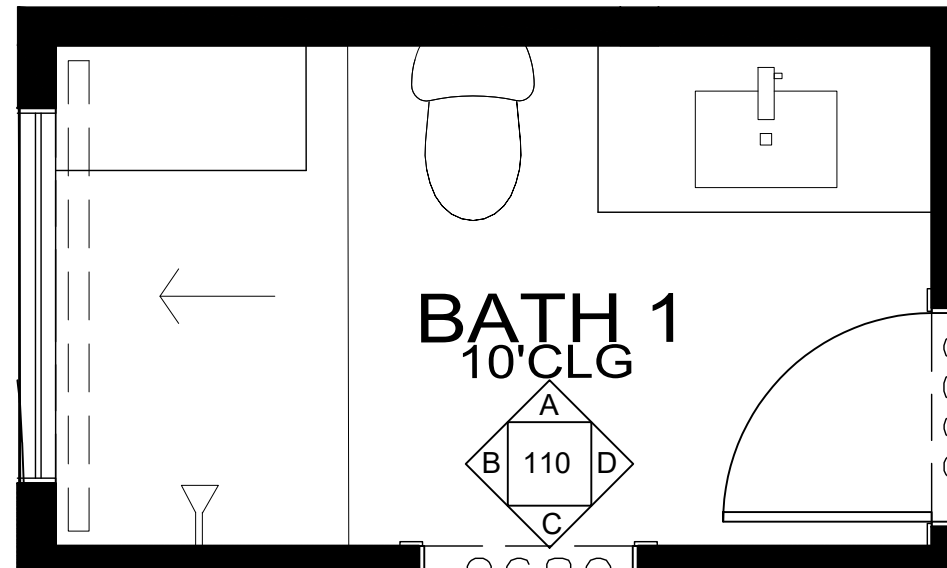



110 BATH 1 - ELEVATION A

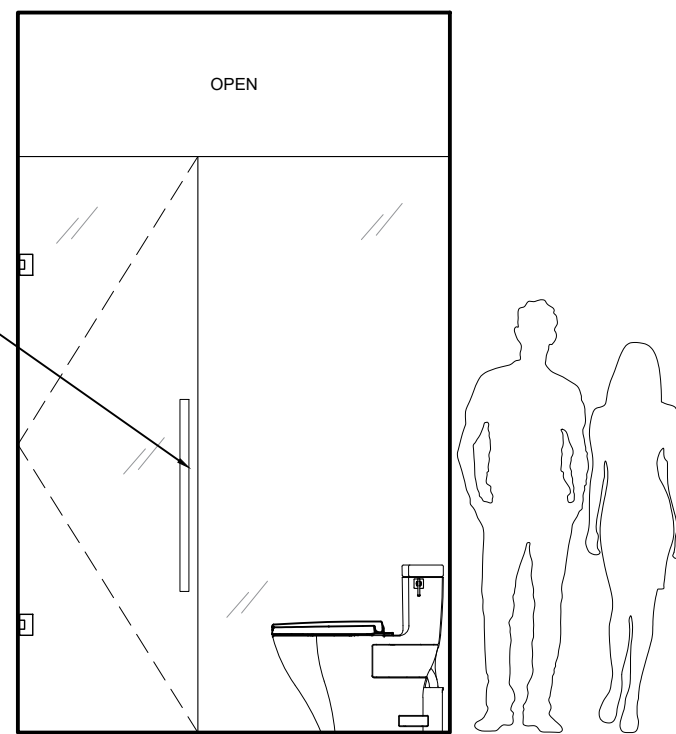



110 BATH 1 - ELEVATION B

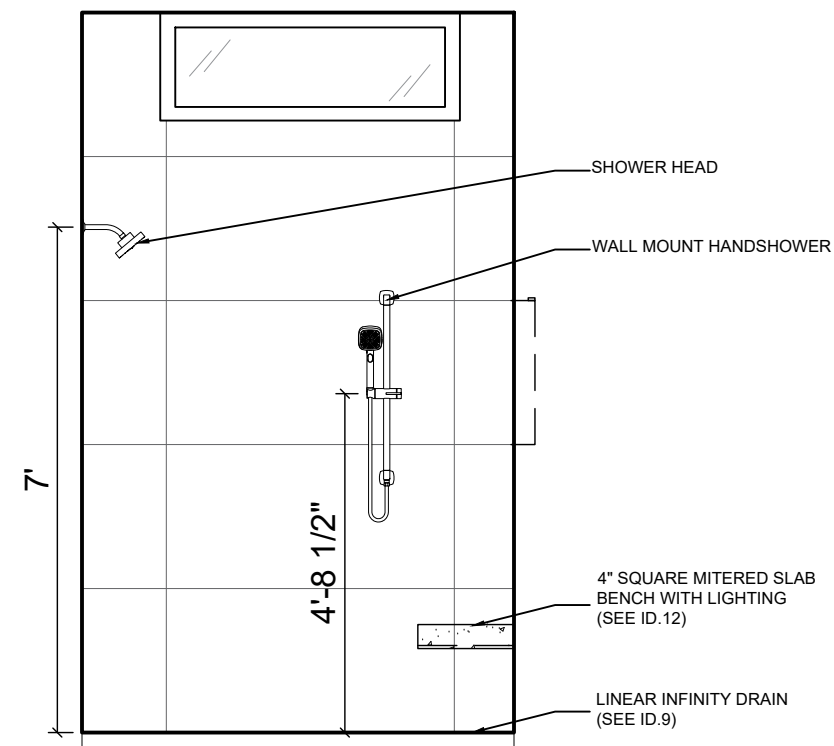






110 BATH 1 - ELEVATION B.1

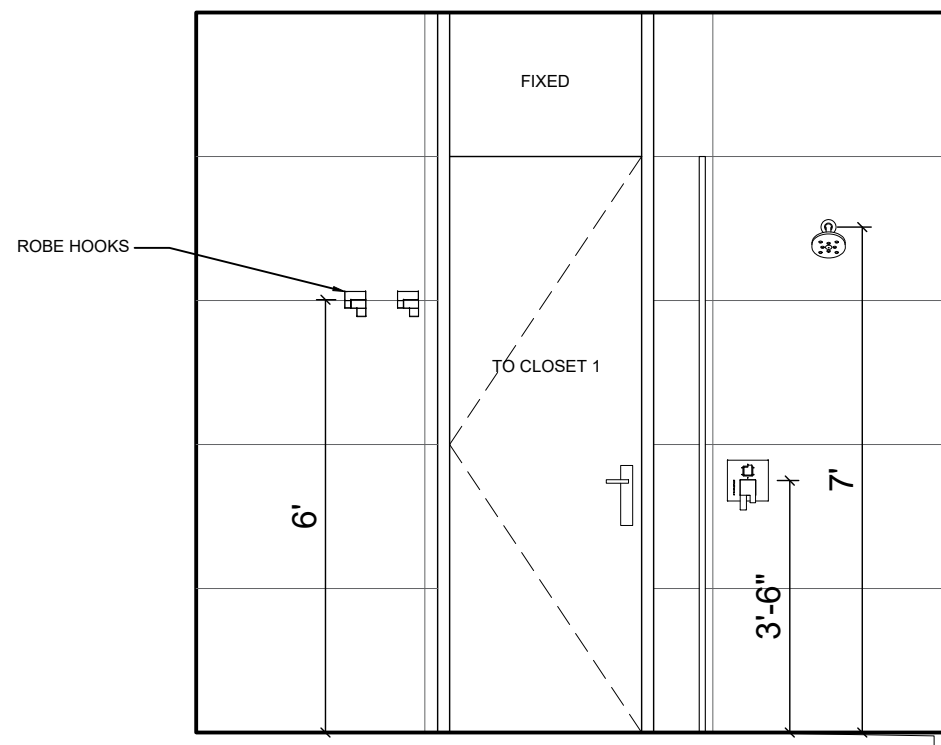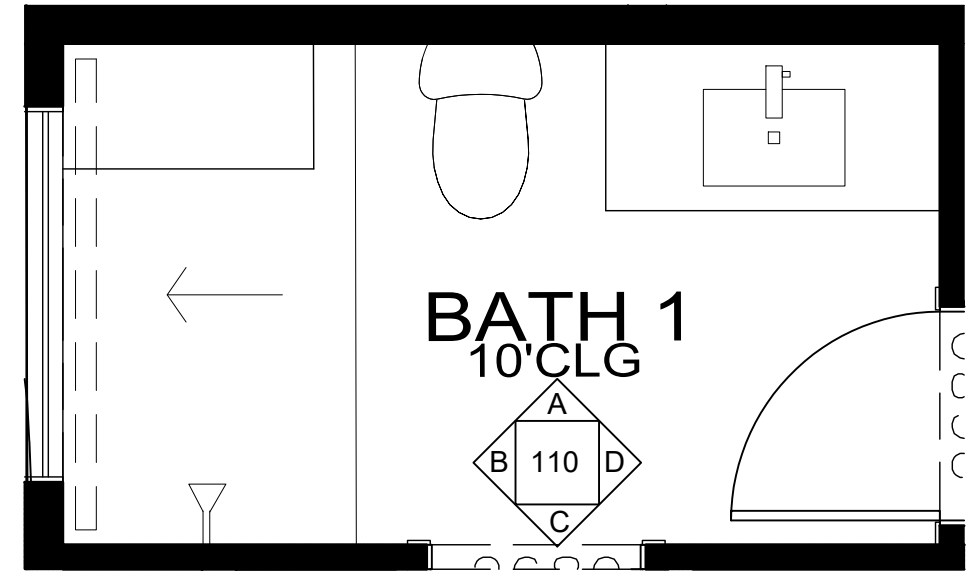


110 BATH 1 - ELEVATION C

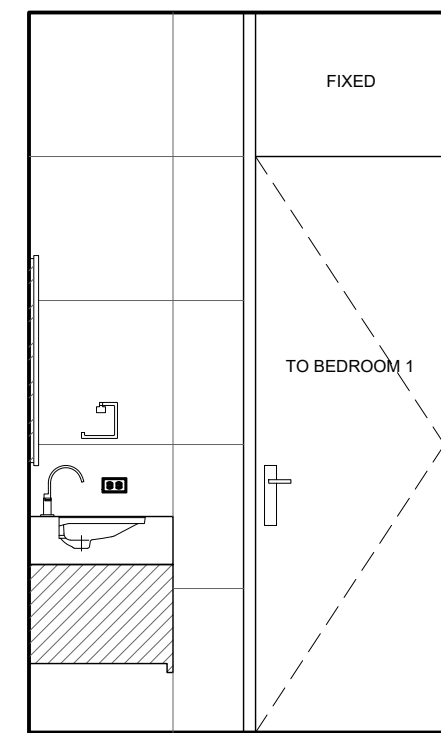

110 BATH 1 - ELEVATION D

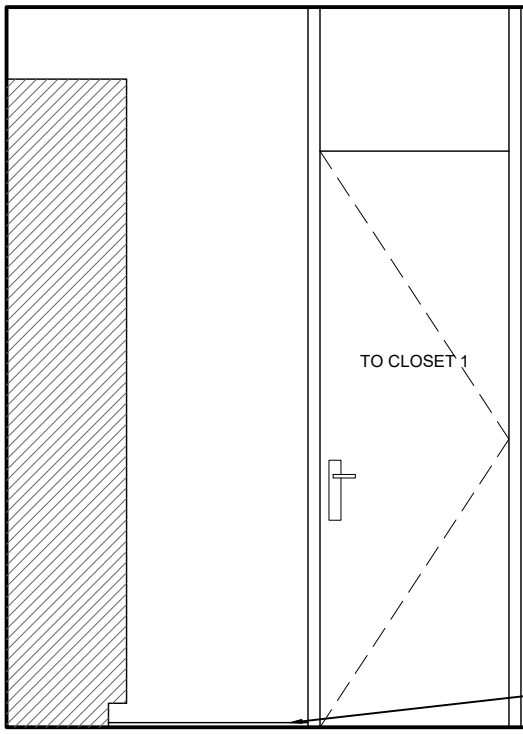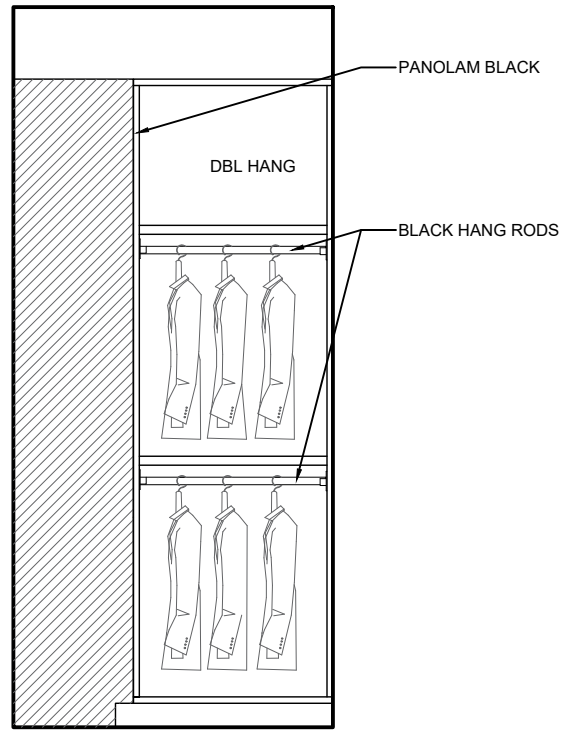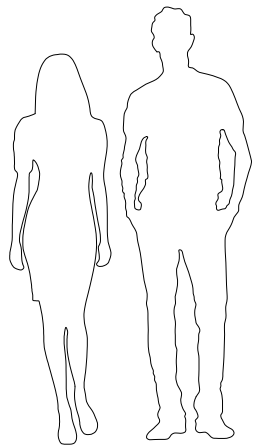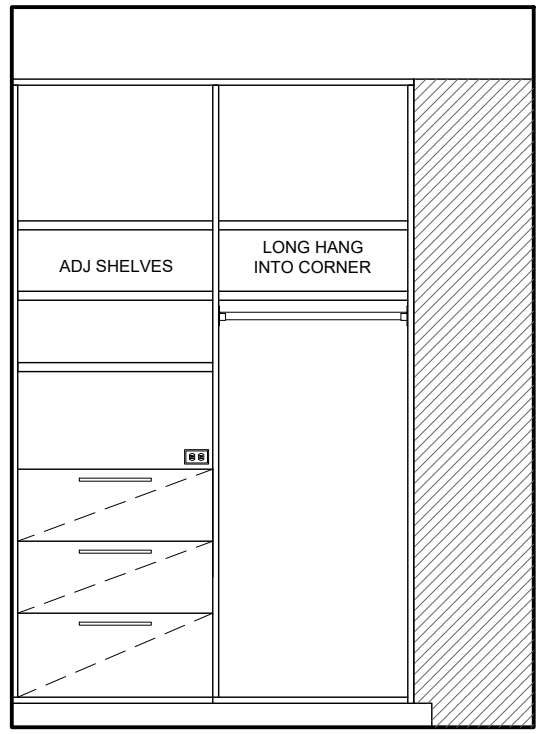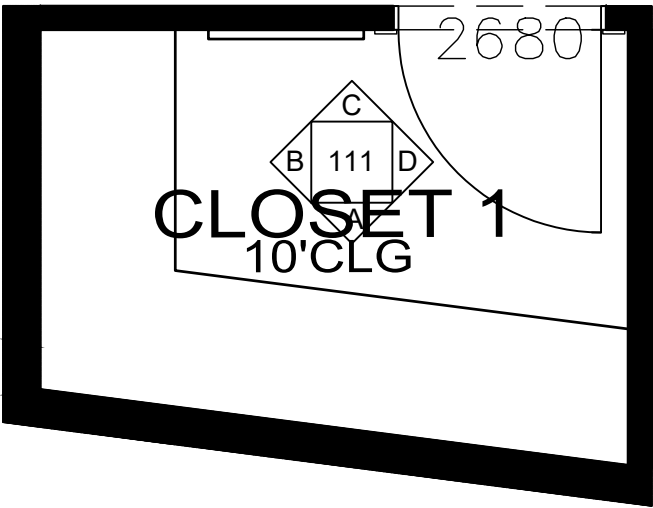

3/4" REGLET  
RECESSED BASE  
(SEE ID.1)


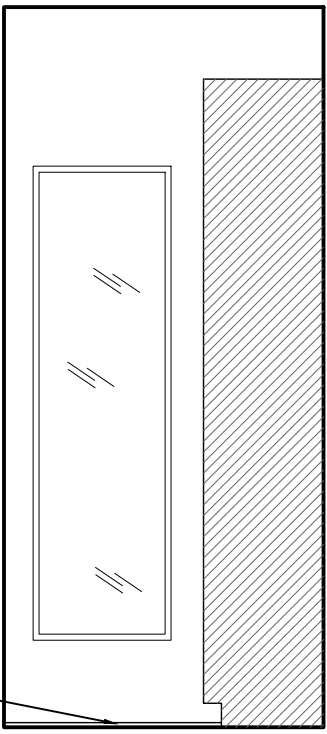


111 W.I.C 1 - ELEVATION A


111 W.I.C 1 - ELEVATION B

111 W.I.C 1 - ELEVATION C


111 W.I.C 1 - ELEVATION D

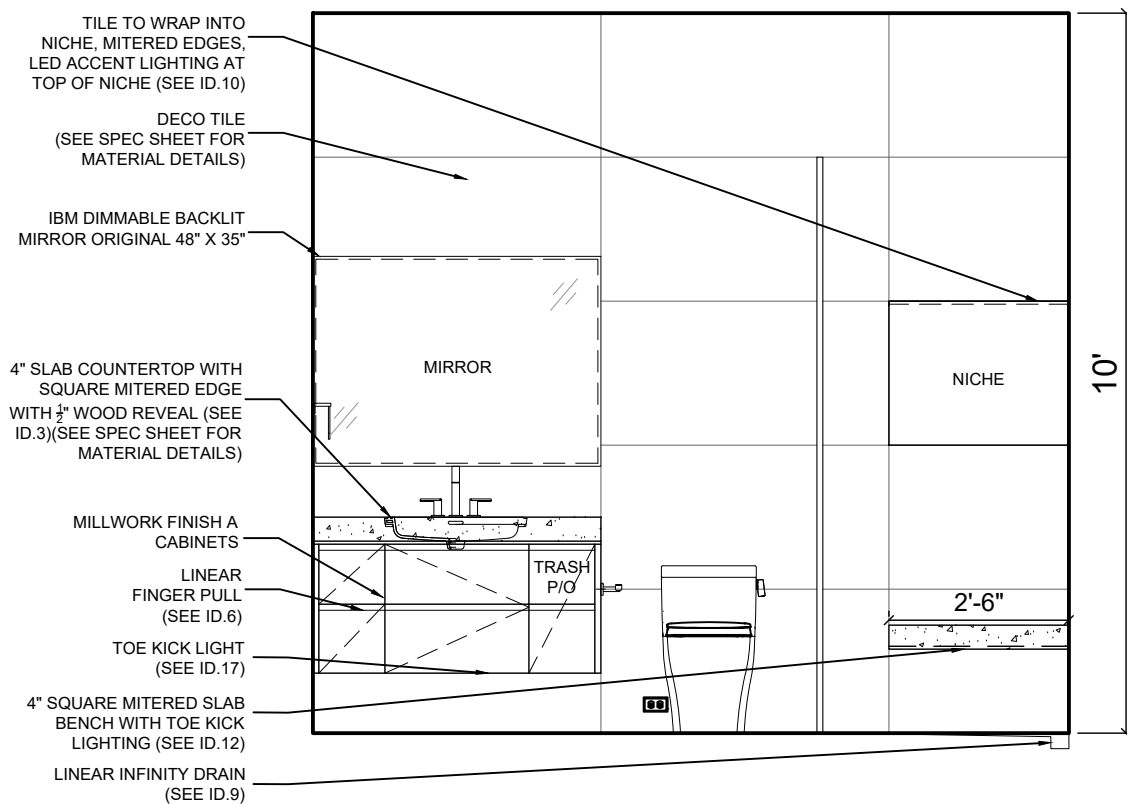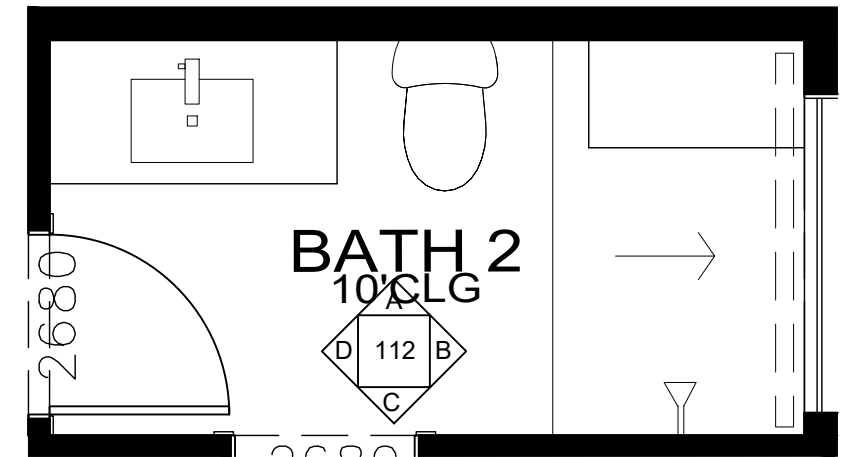

112 BATH 2 - ELEVATION A


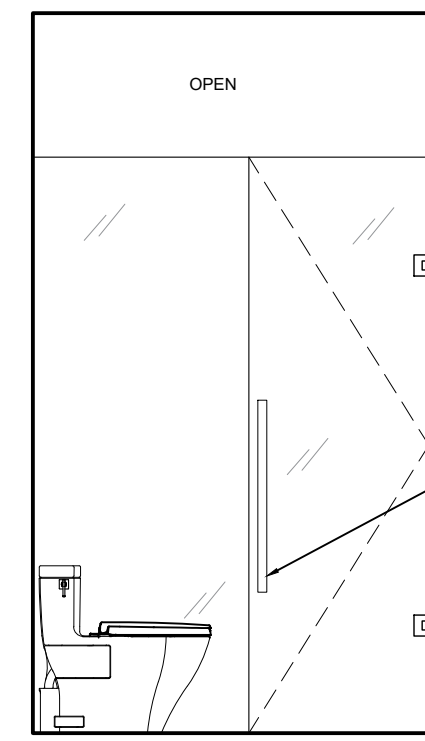


112 BATH 2 - ELEVATION B

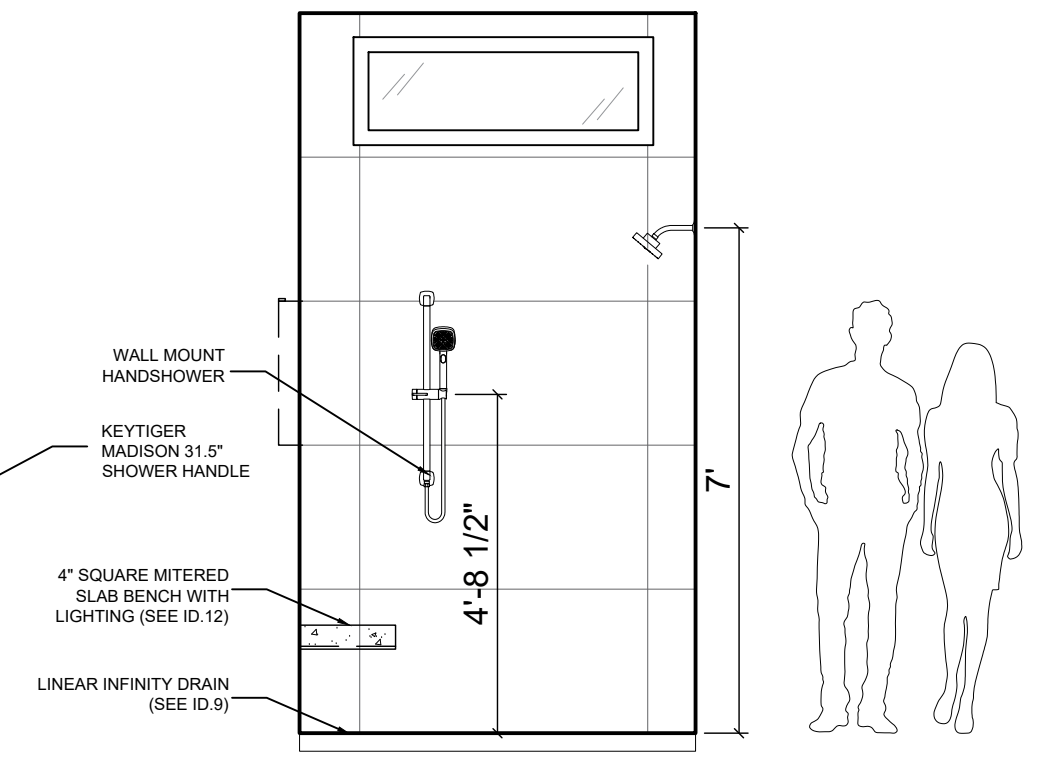






112 BATH 2 - ELEVATION B.1



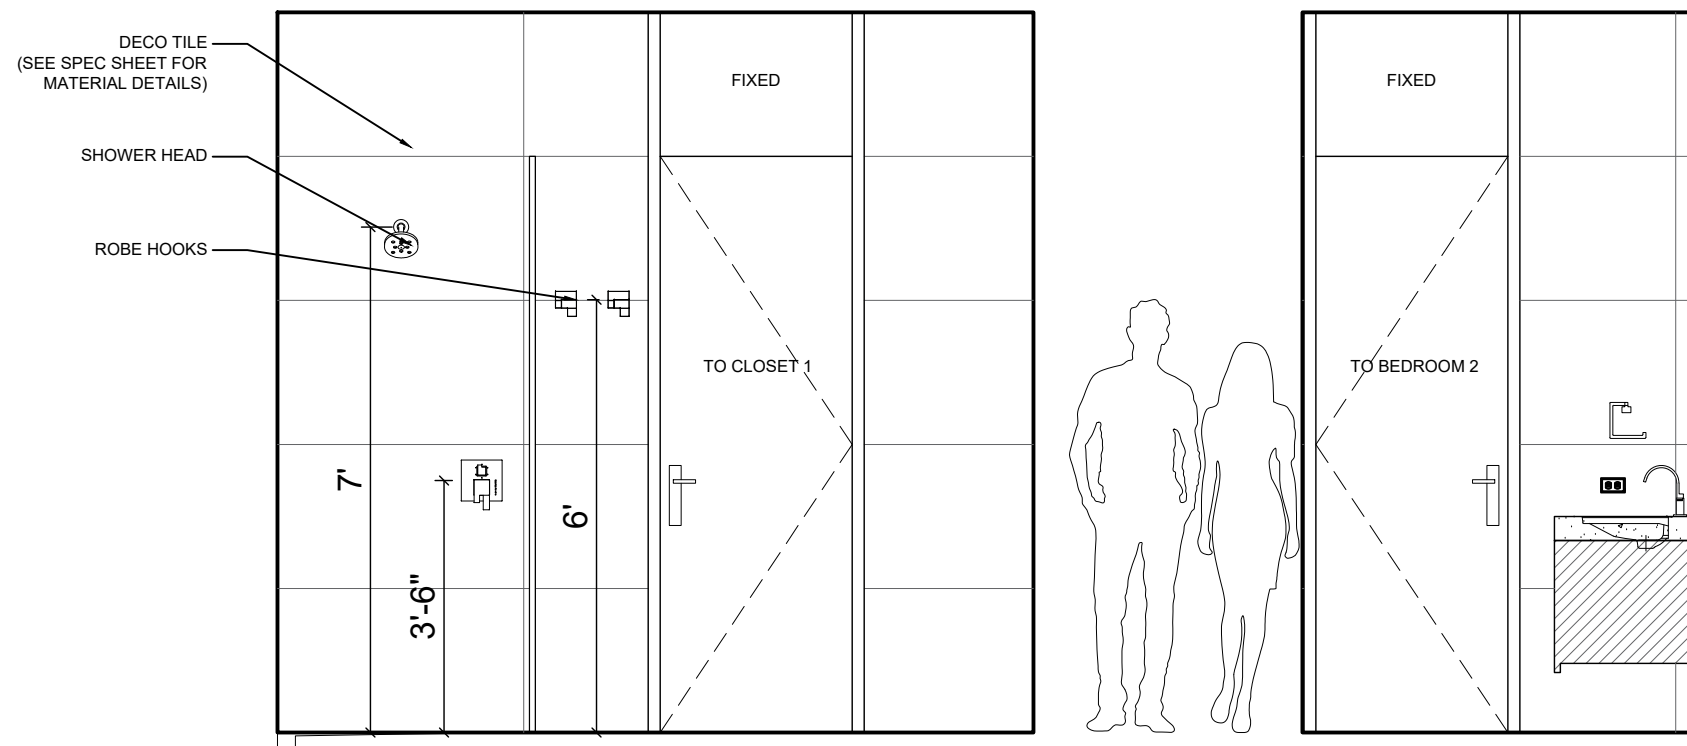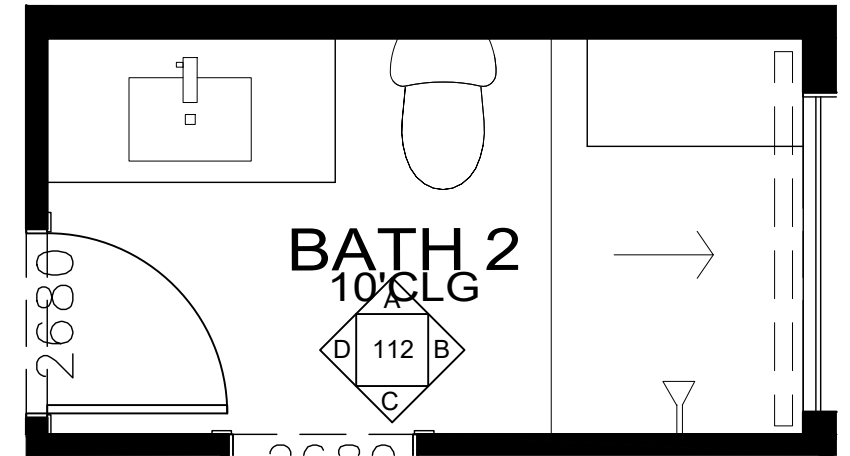

112 BATH 2 - ELEVATION C

112 BATH 2 - ELEVATION D

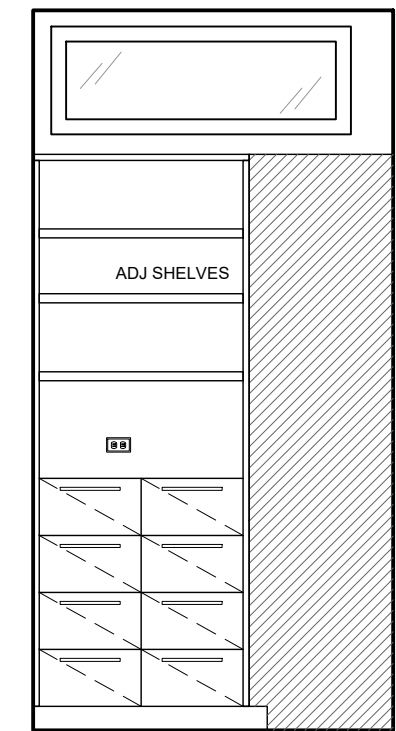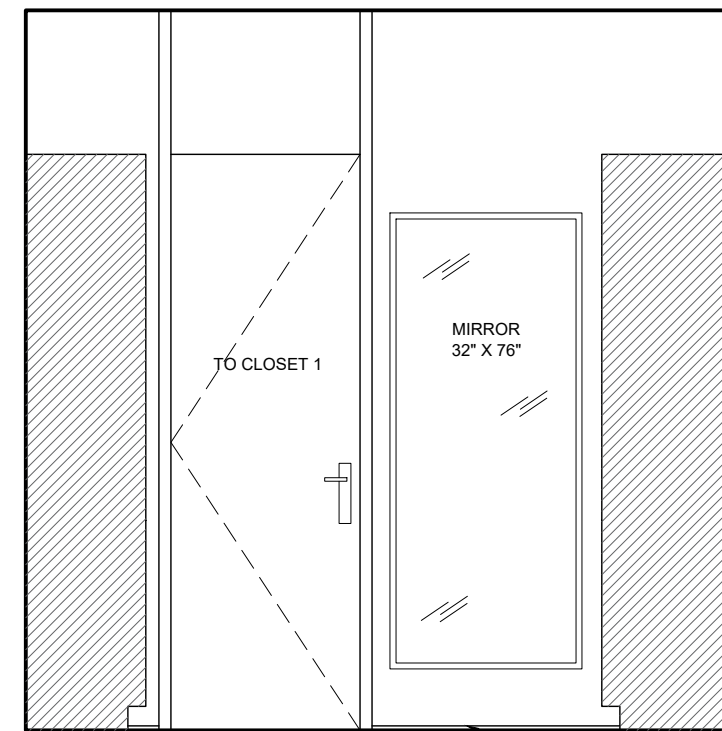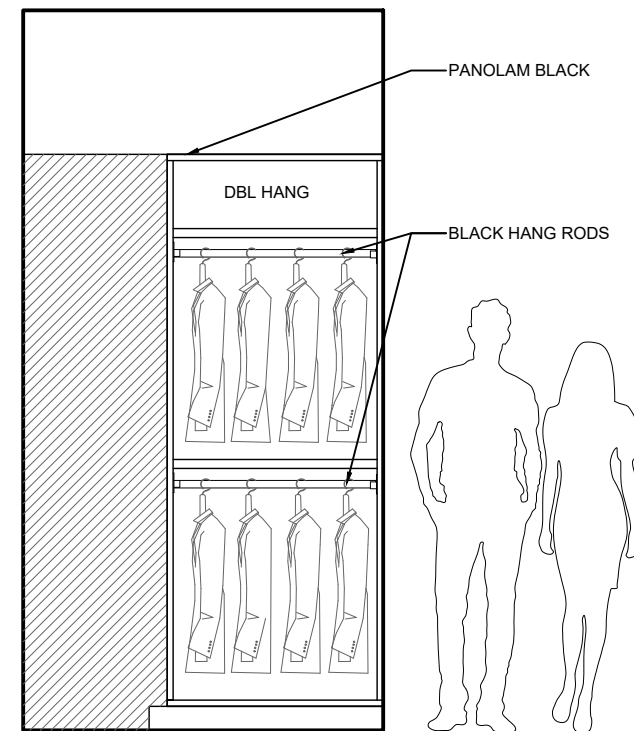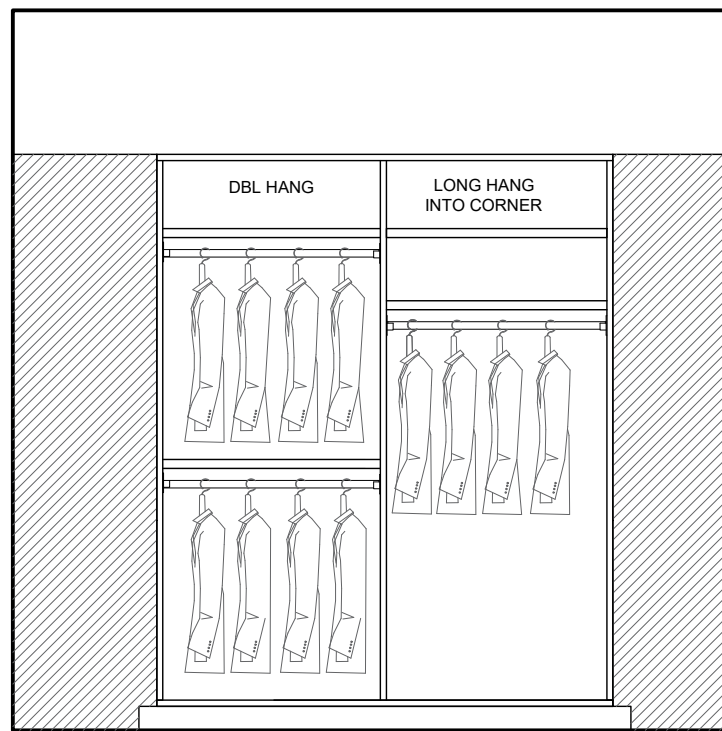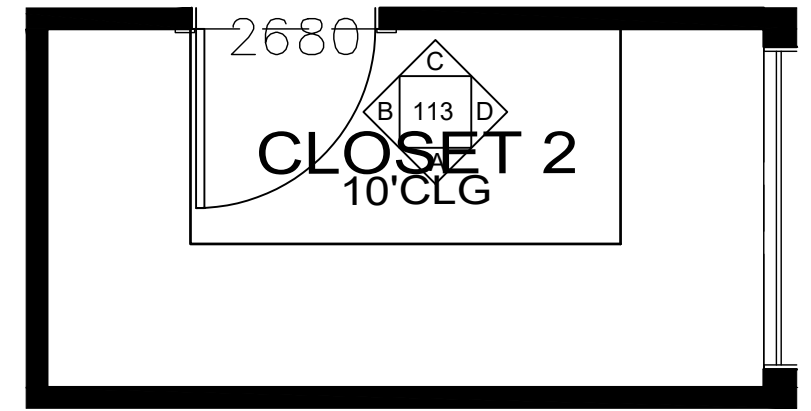



3/4" REGLET  
RECESSED BASE  
(SEE ID.1)

113 W.I.C 2 - ELEVATION A


113 W.I.C 2 - ELEVATION B

113 W.I.C 2 - ELEVATION C


113 W.I.C 2 - ELEVATION D

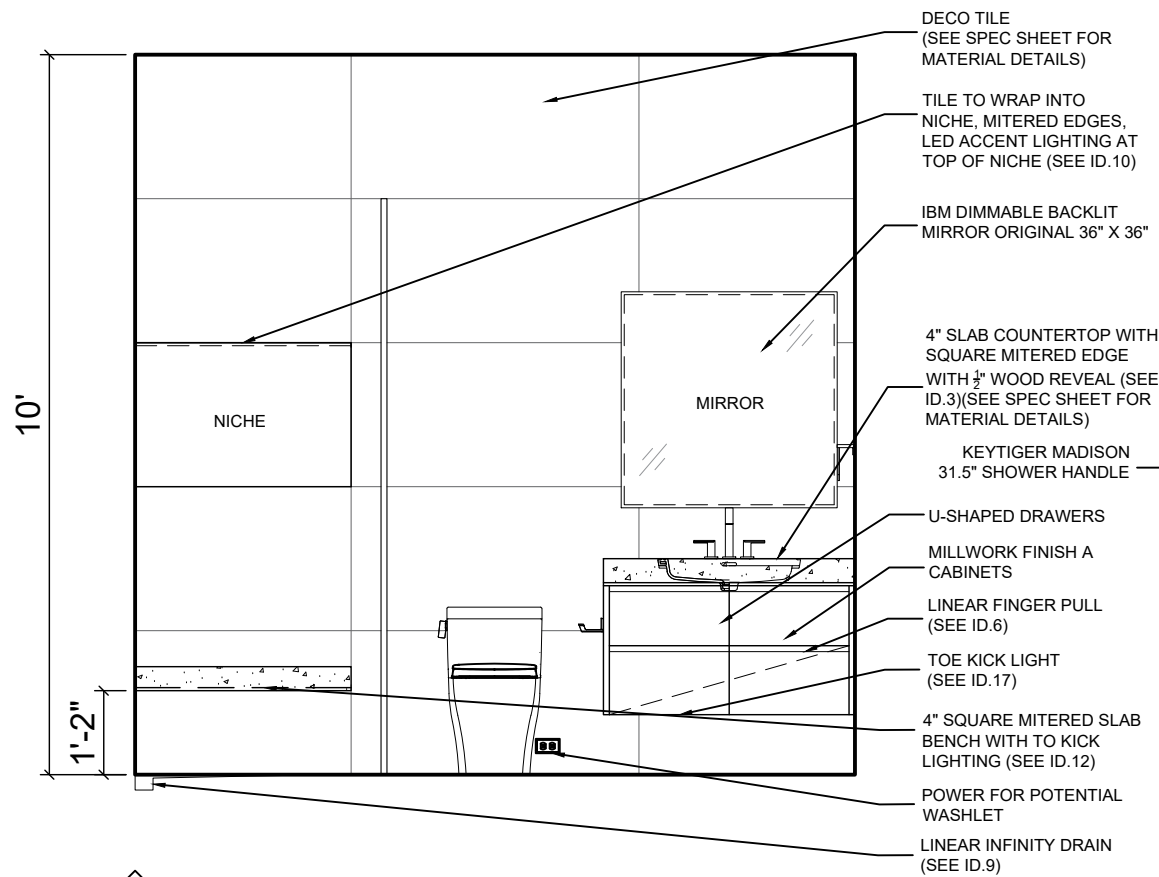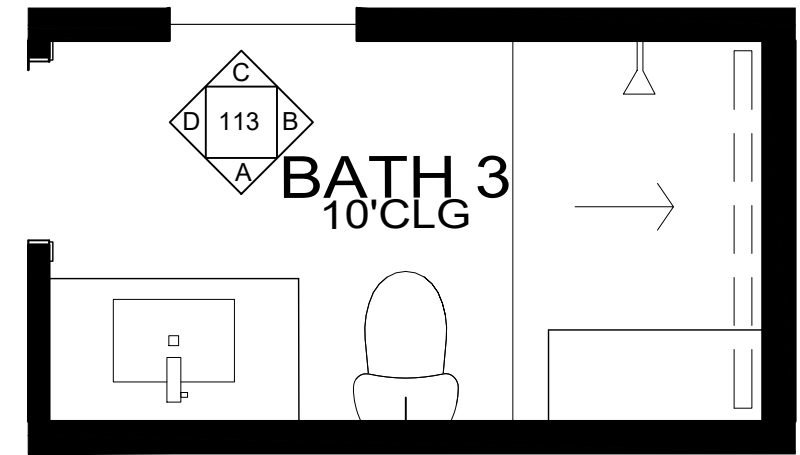



114 BATH 3 - ELEVATION A

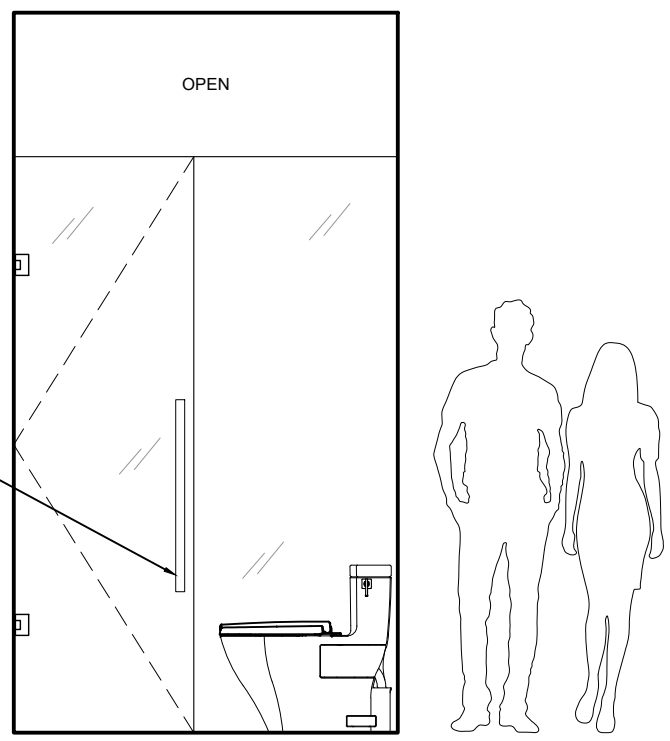


114 BATH 3 - ELEVATION B

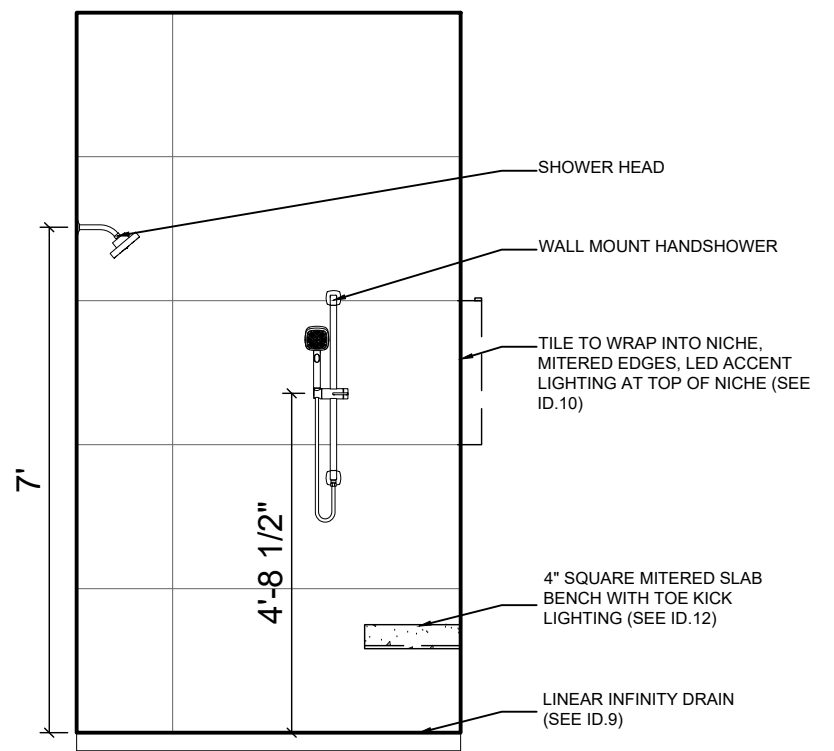

114 BATH 3 - ELEVATION B.1




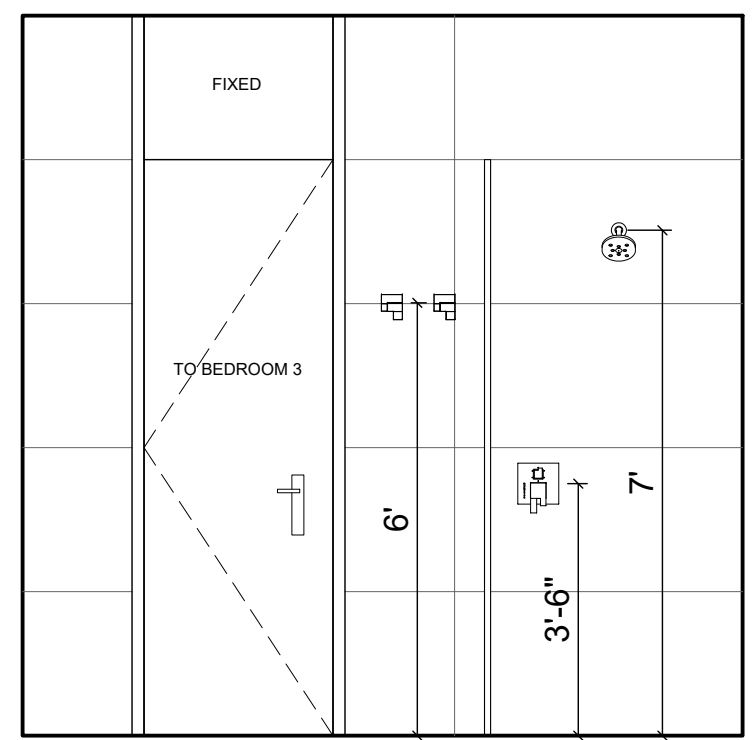
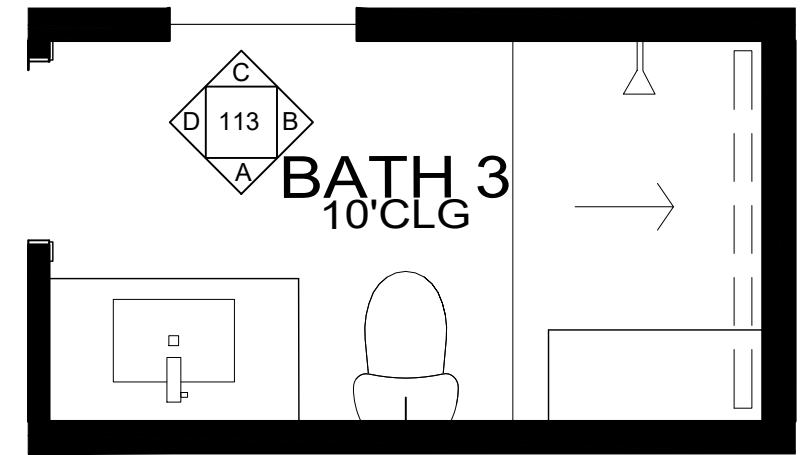


114 BATH 3 - ELEVATION C

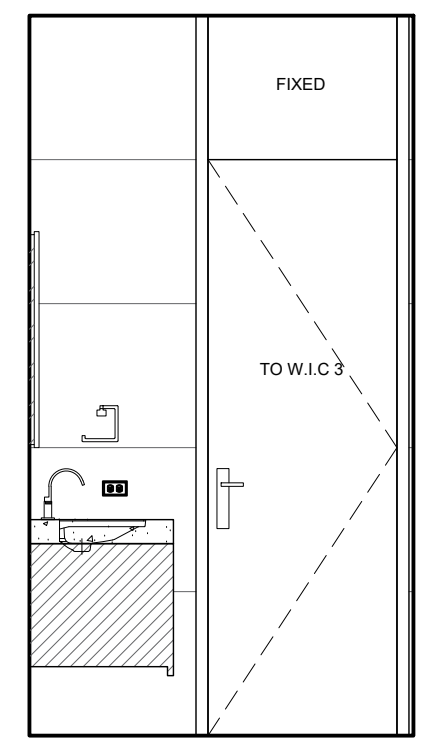

114 BATH 3 - ELEVATION D



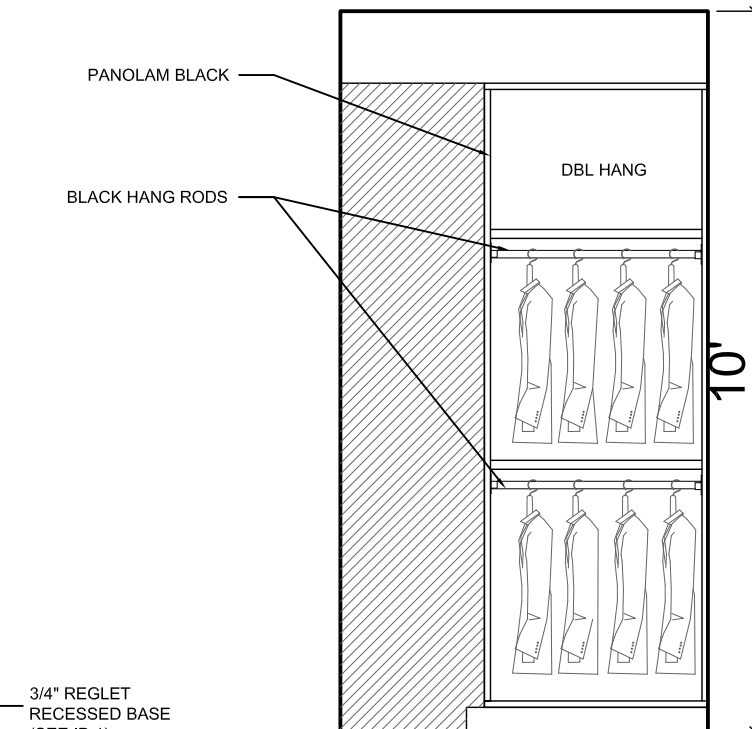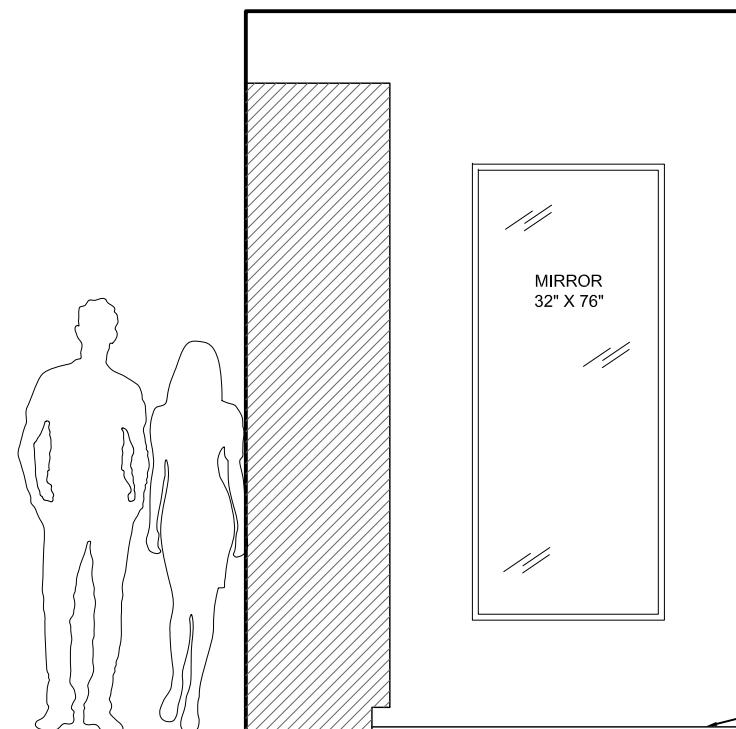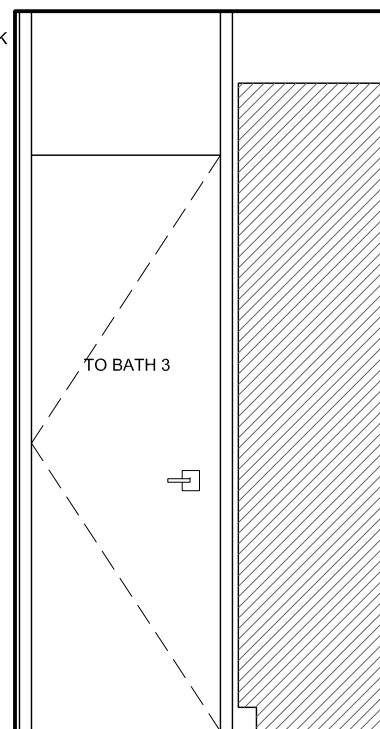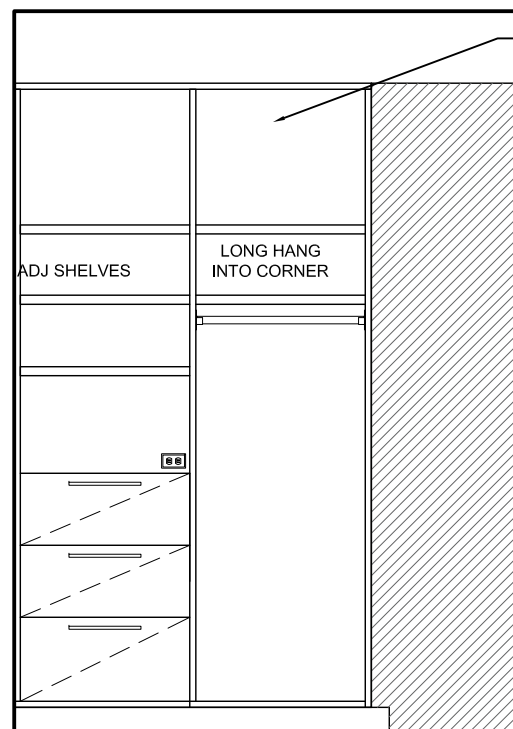
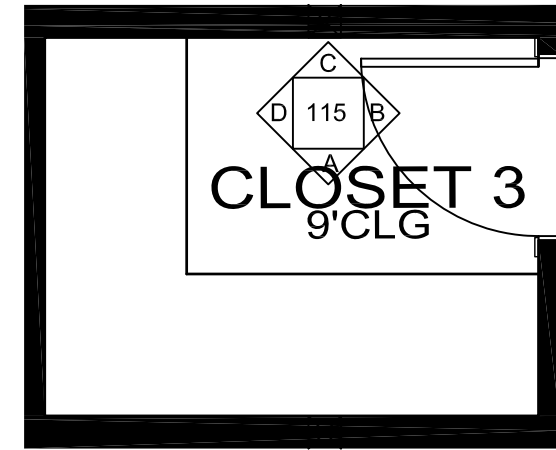


115 W.I.C 3 - ELEVATION A


115 W.I.C 3 - ELEVATION B

115 W.I.C 3 - ELEVATION C


115 W.I.C 3 - ELEVATION D

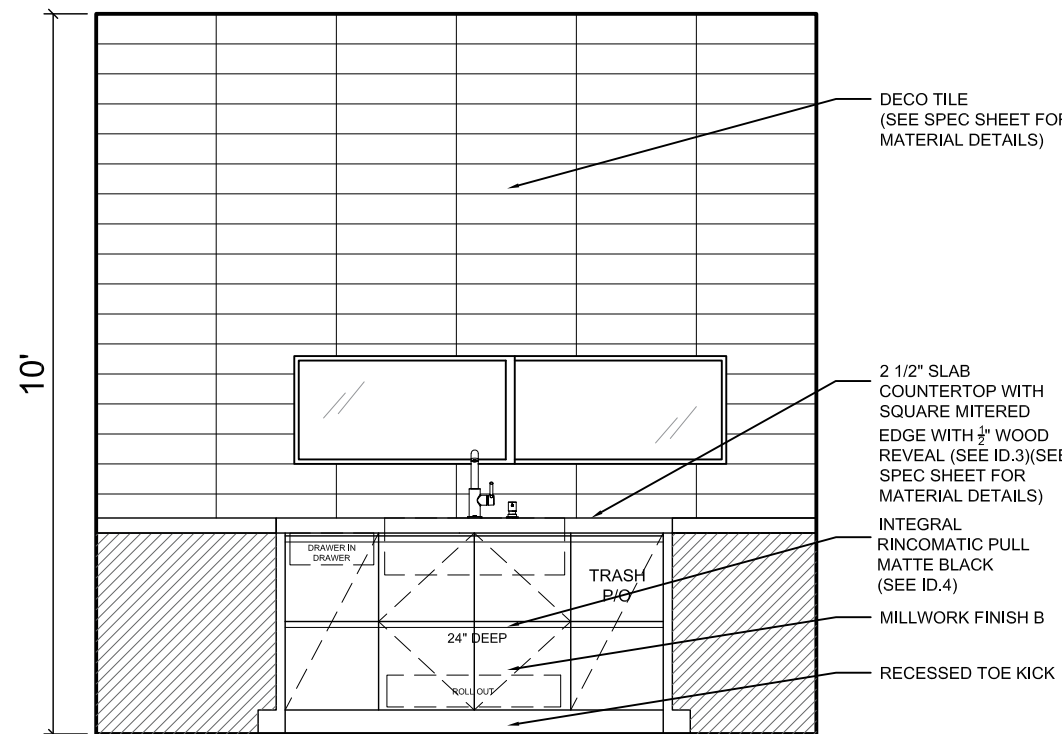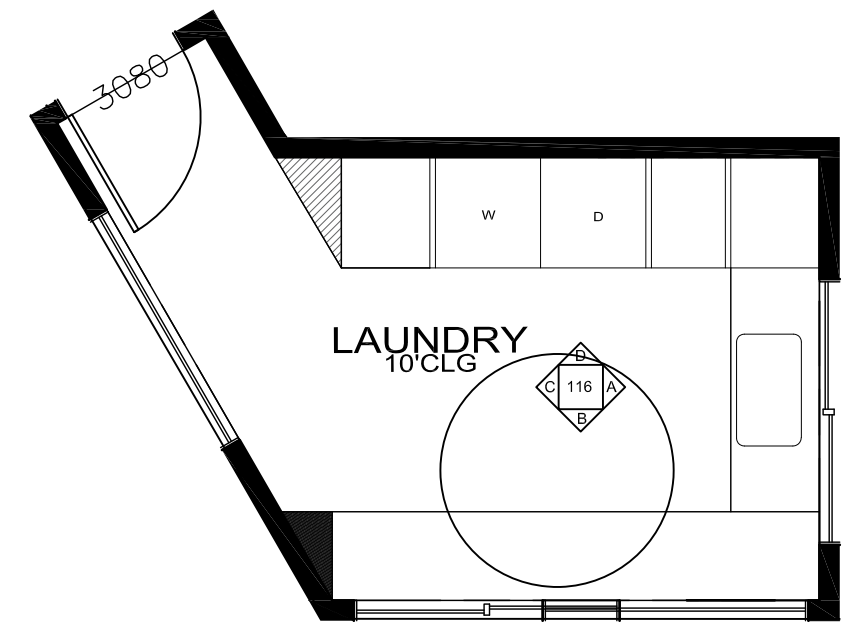



116 LAUNDRY - ELEVATION A


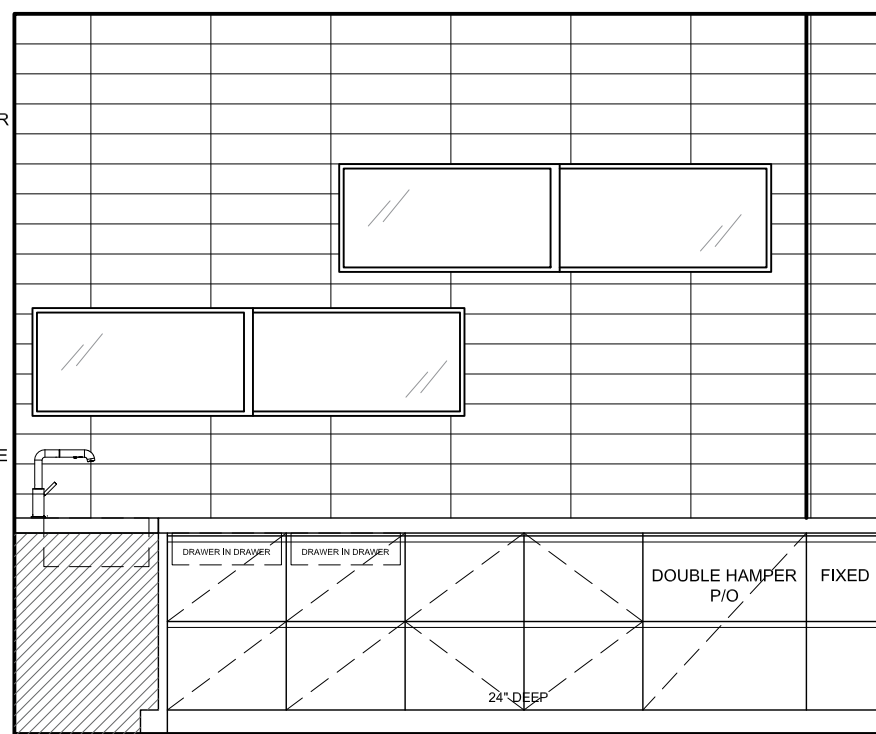


116 LAUNDRY - ELEVATION B

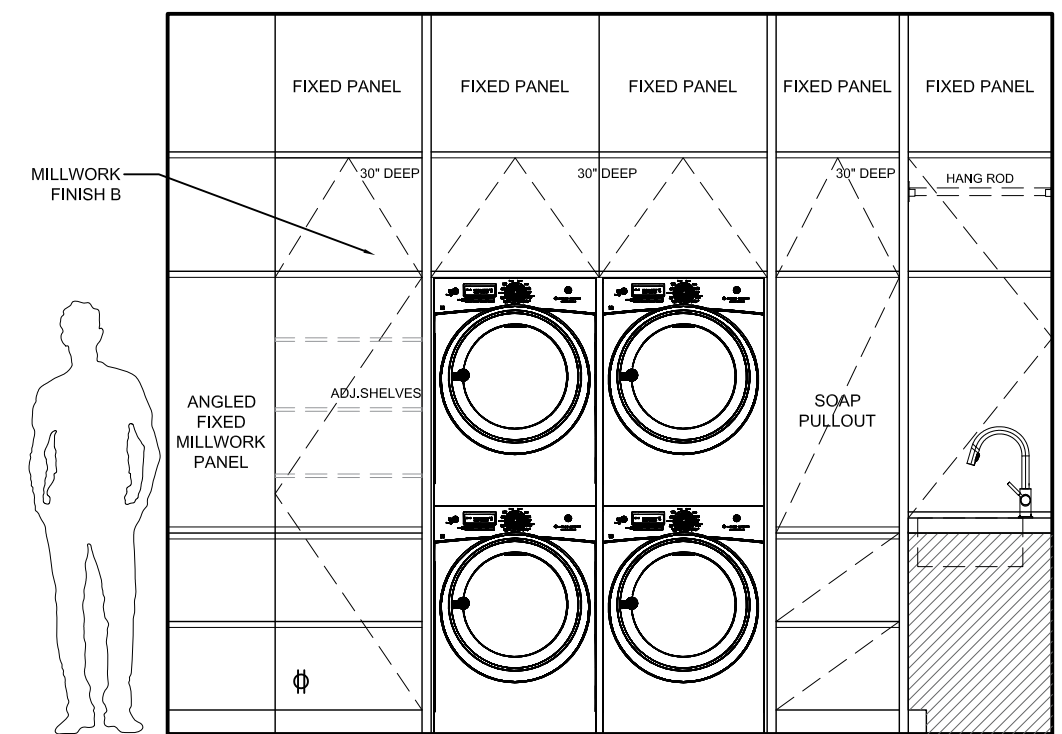


116 LAUNDRY - ELEVATION C

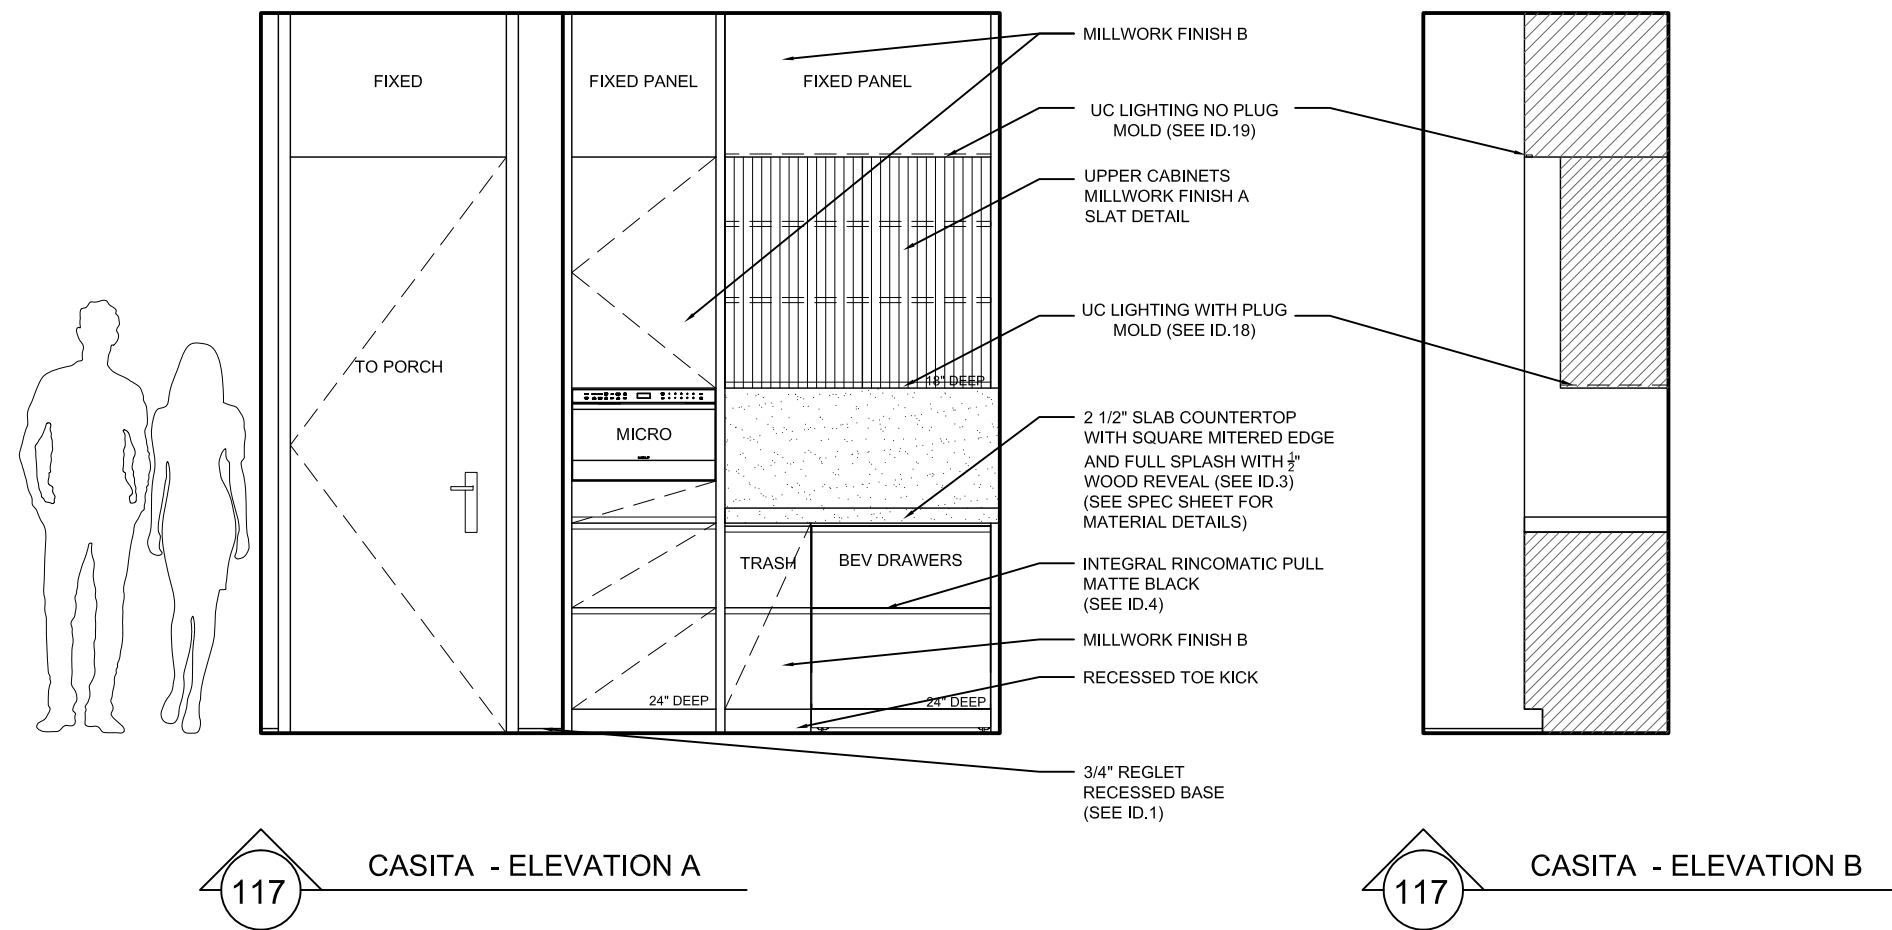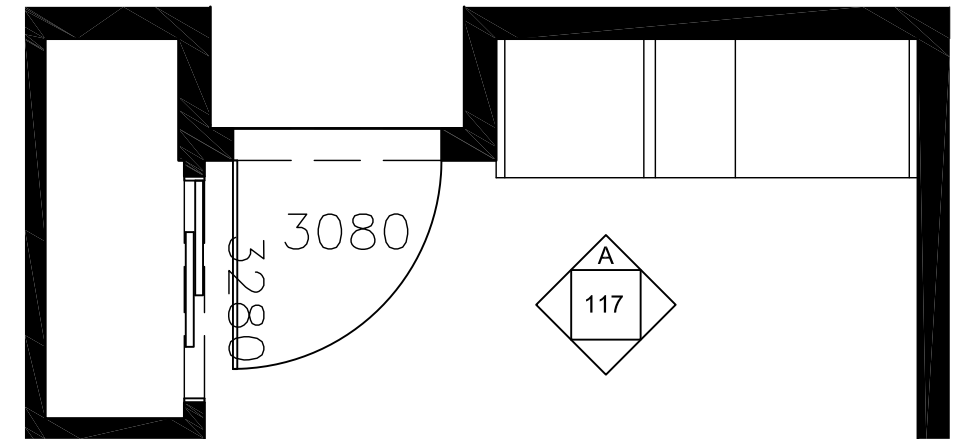


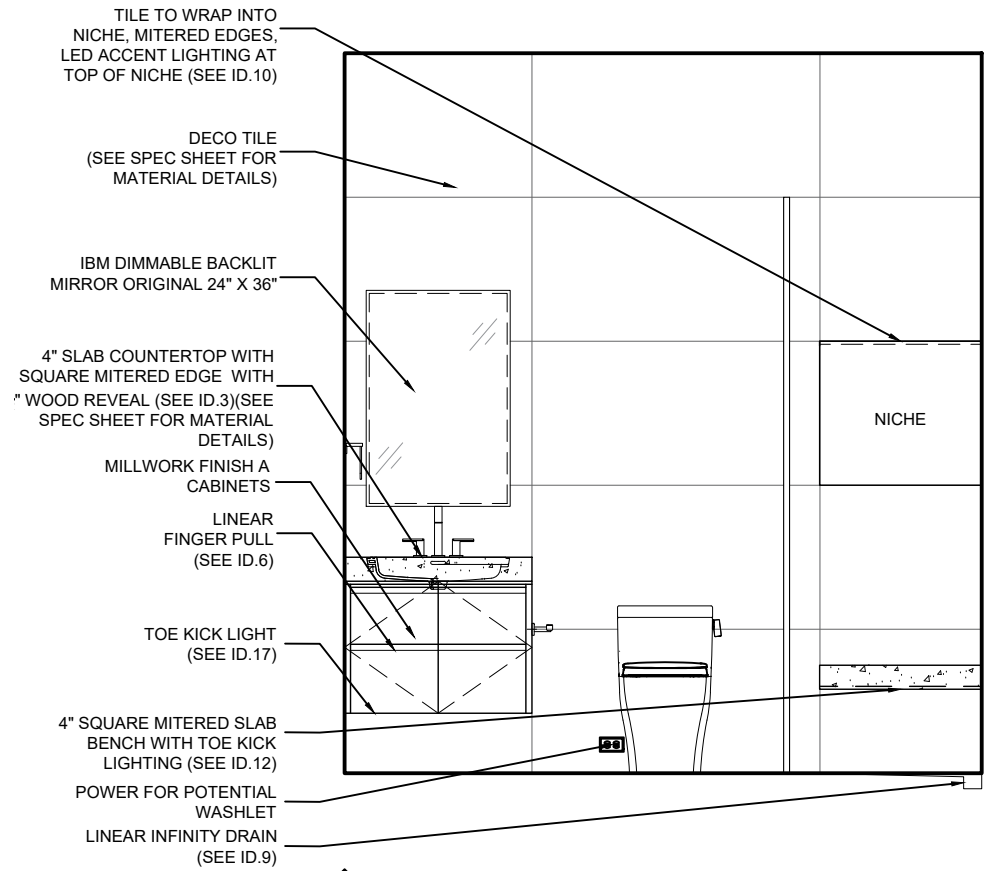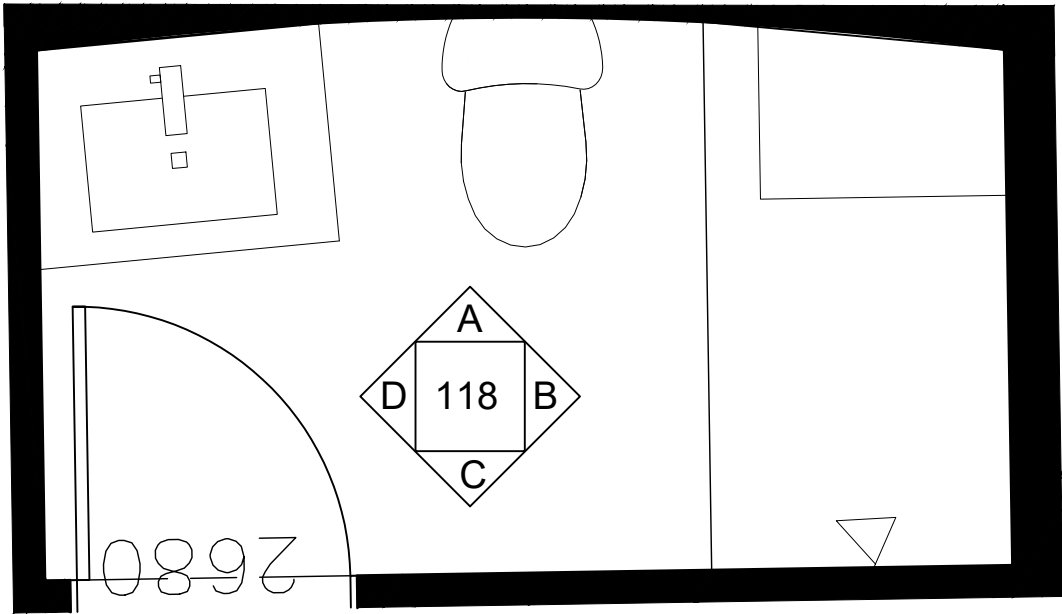

118 CASITA BATH - ELEVATION A


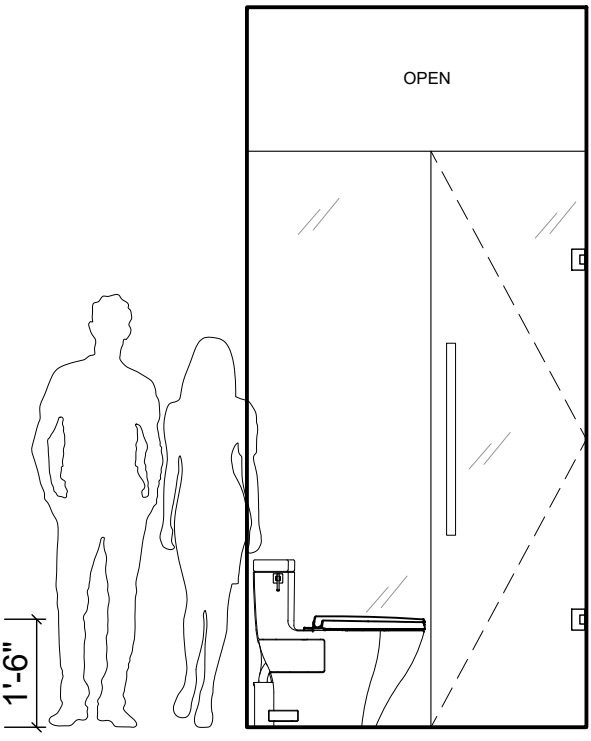


118 CASITA BATH - ELEVATION B

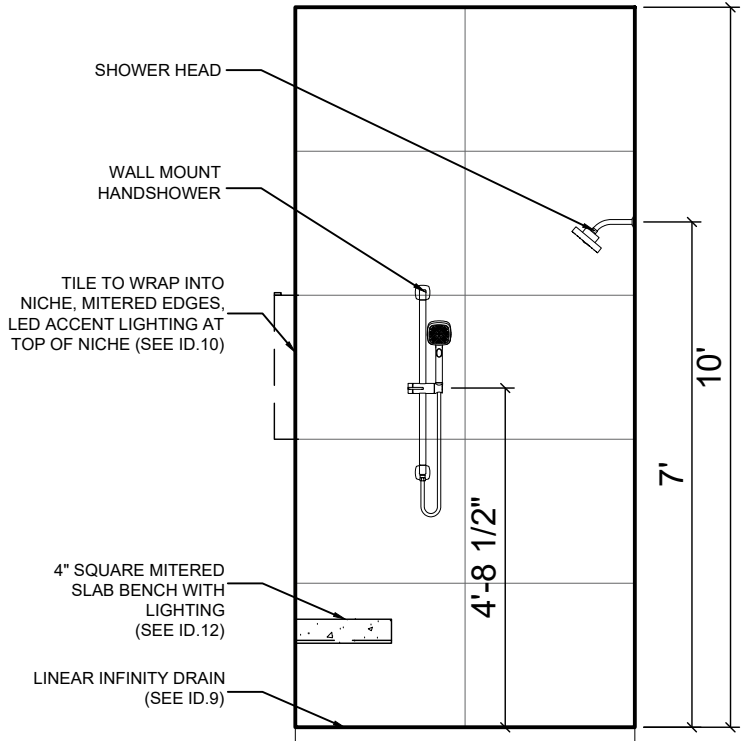


118 CASITA BATH - ELEVATION B.1





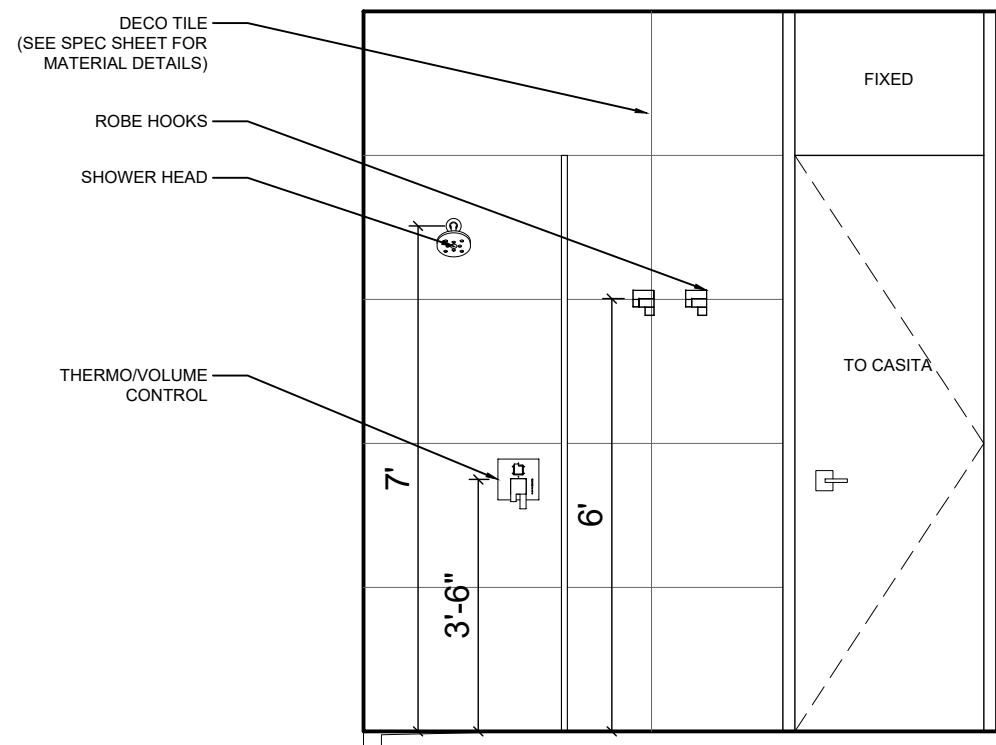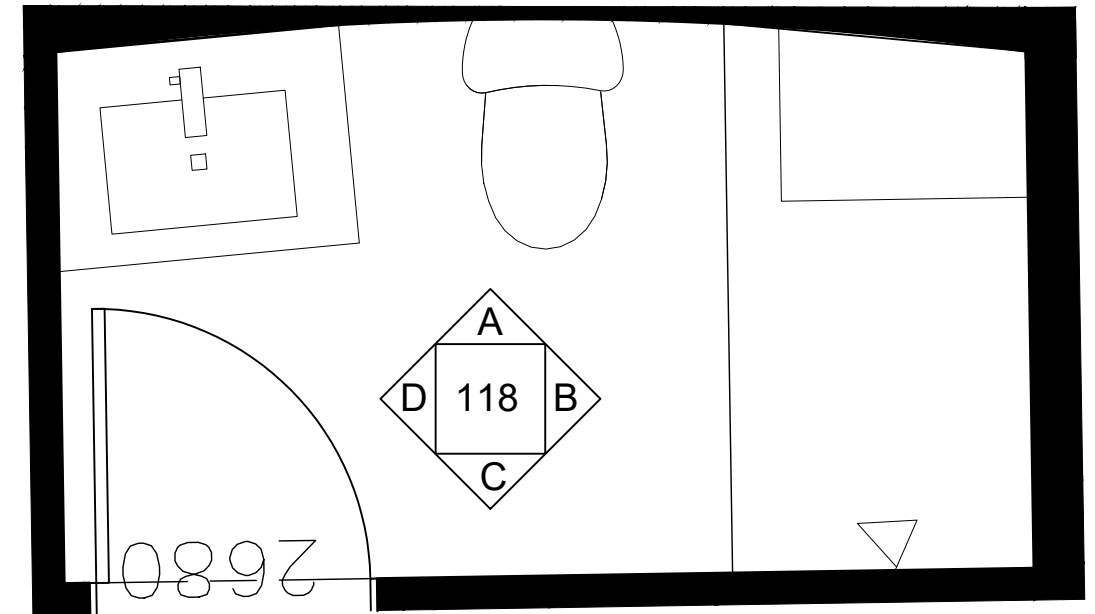




118 CASITA BATH - ELEVATION C

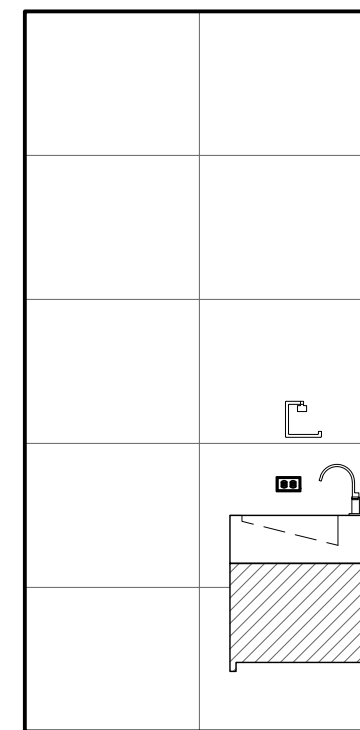

118 CASITA BATH - ELEVATION D


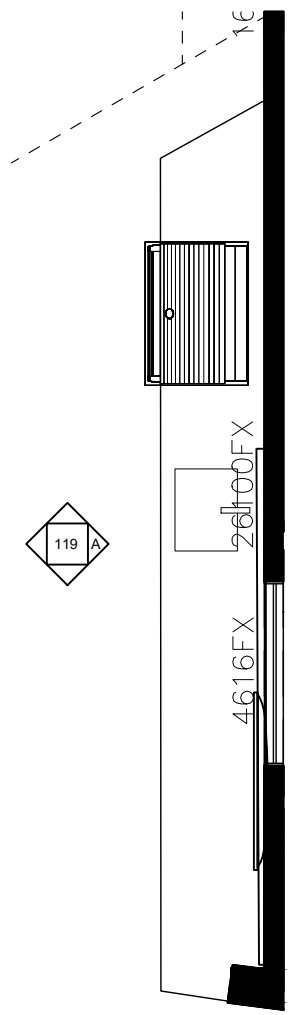
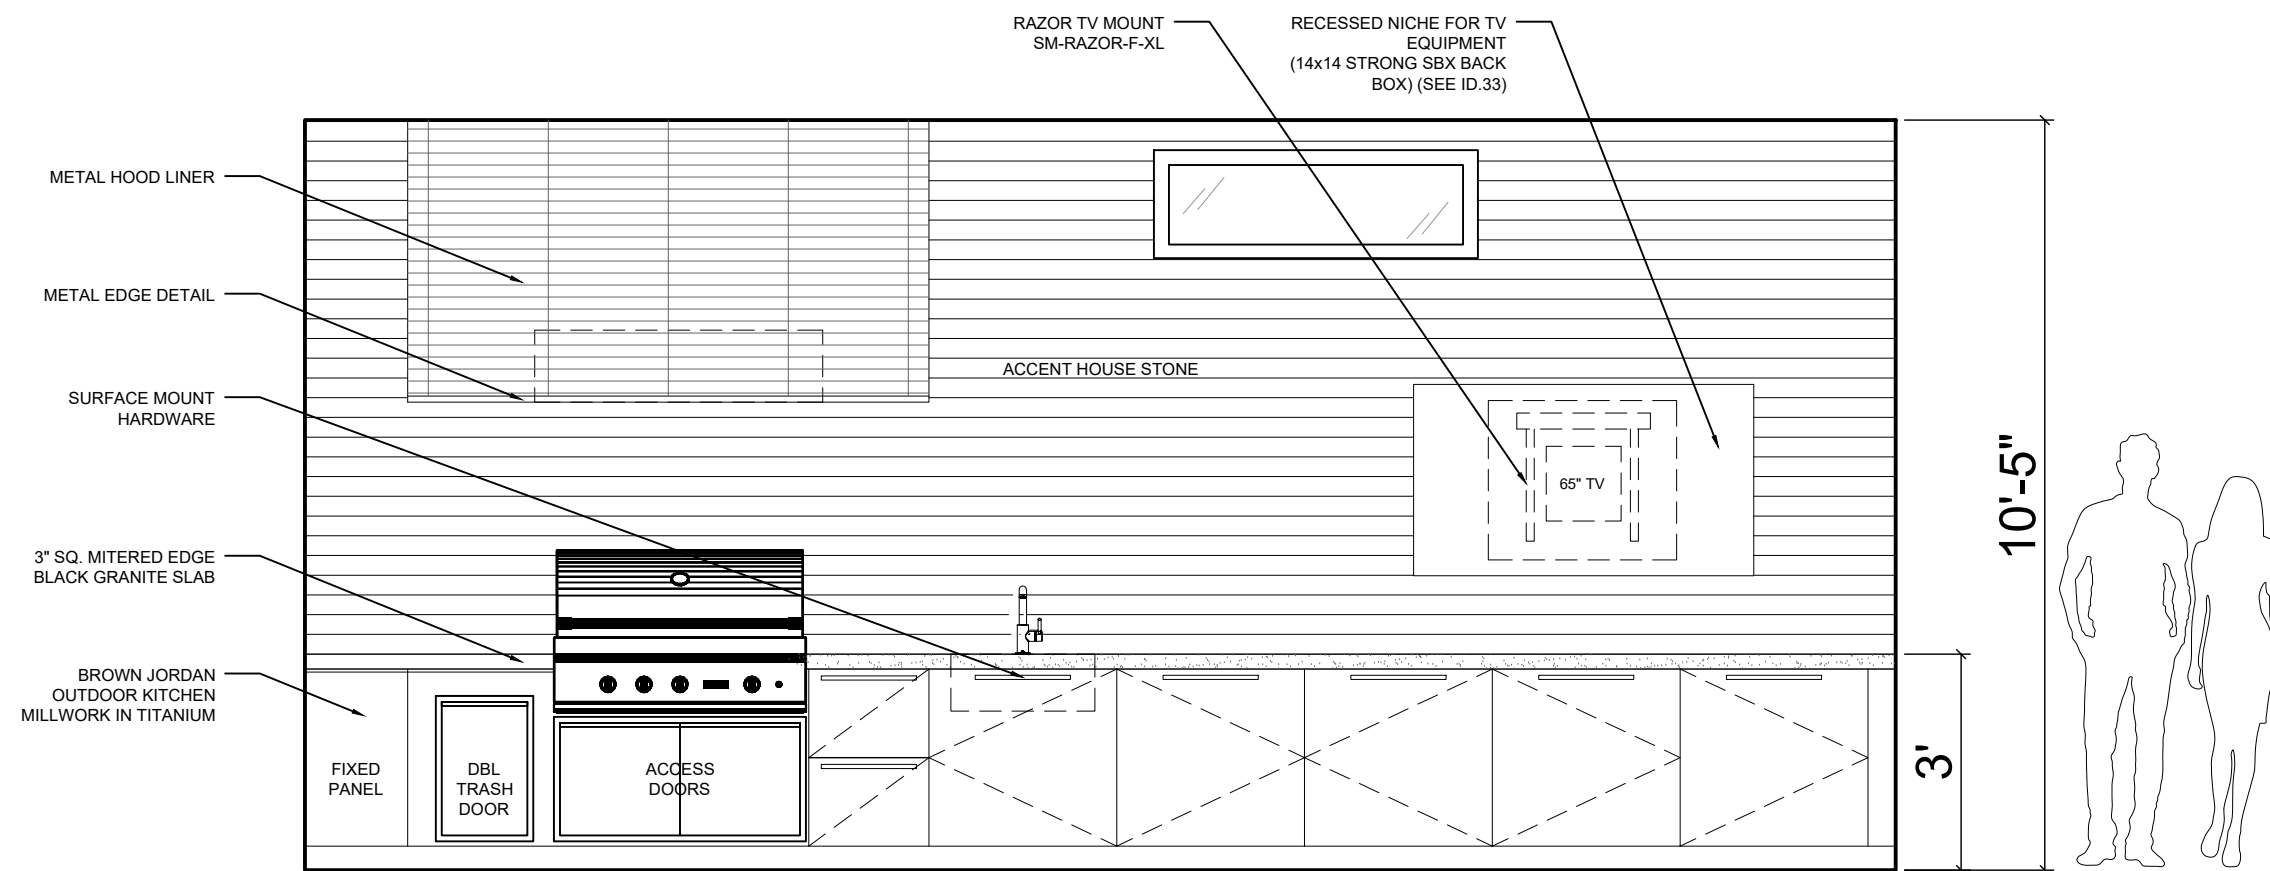


119 BBQ - ELEVATION A

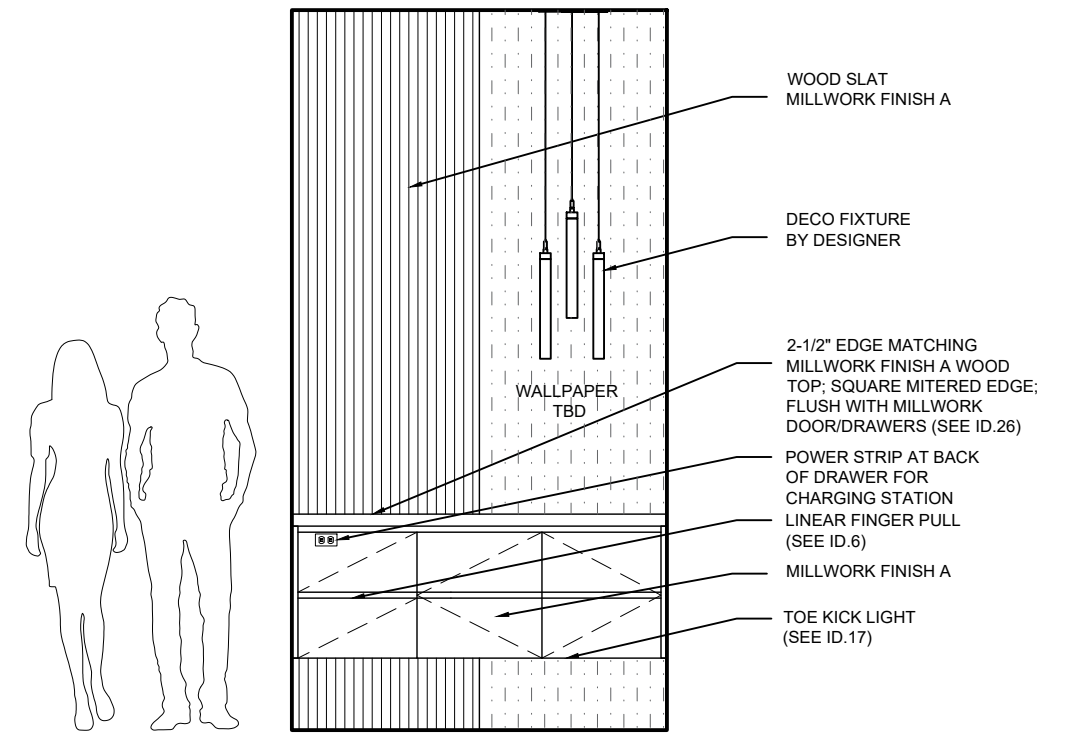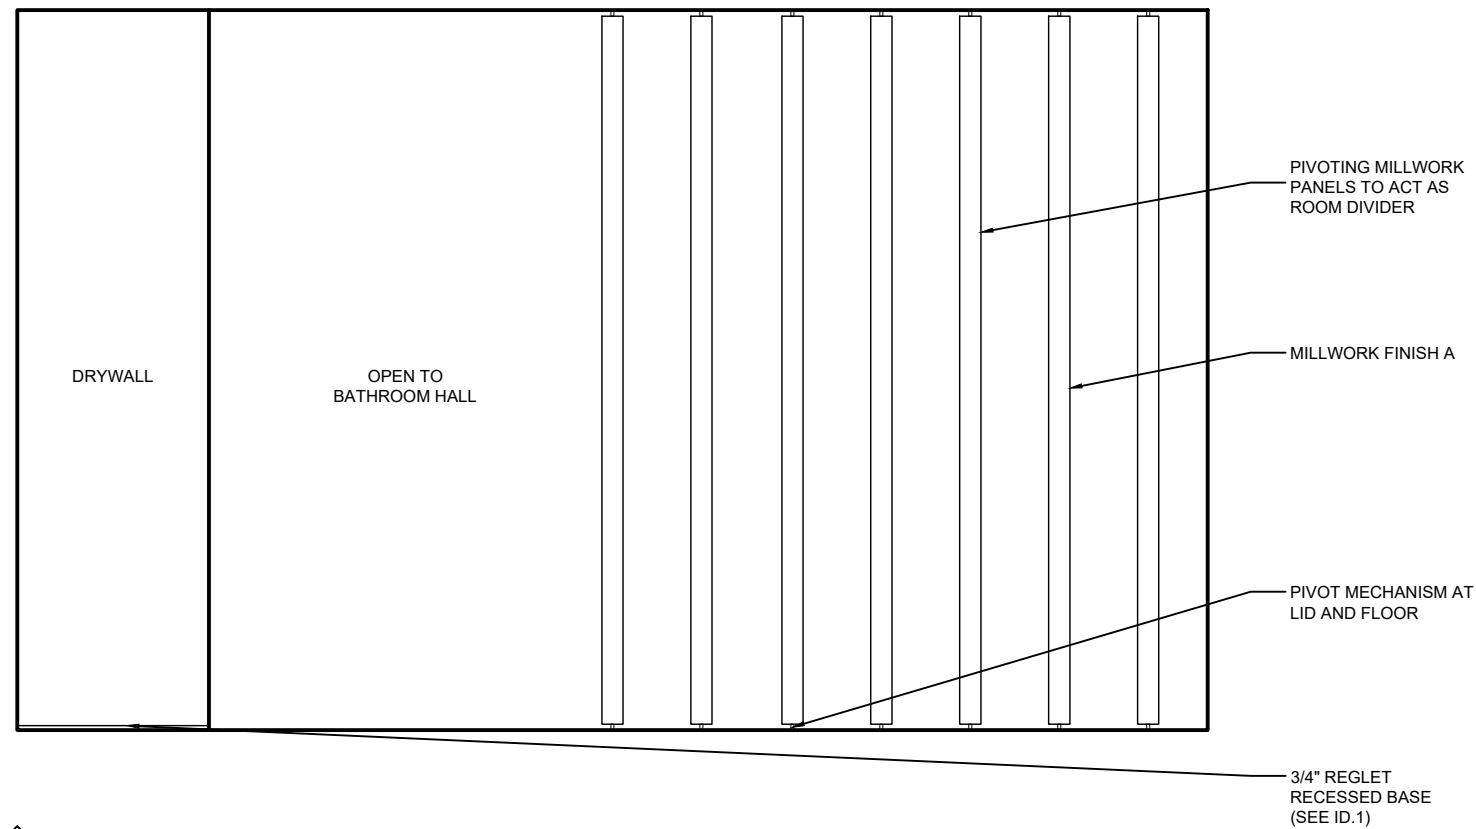
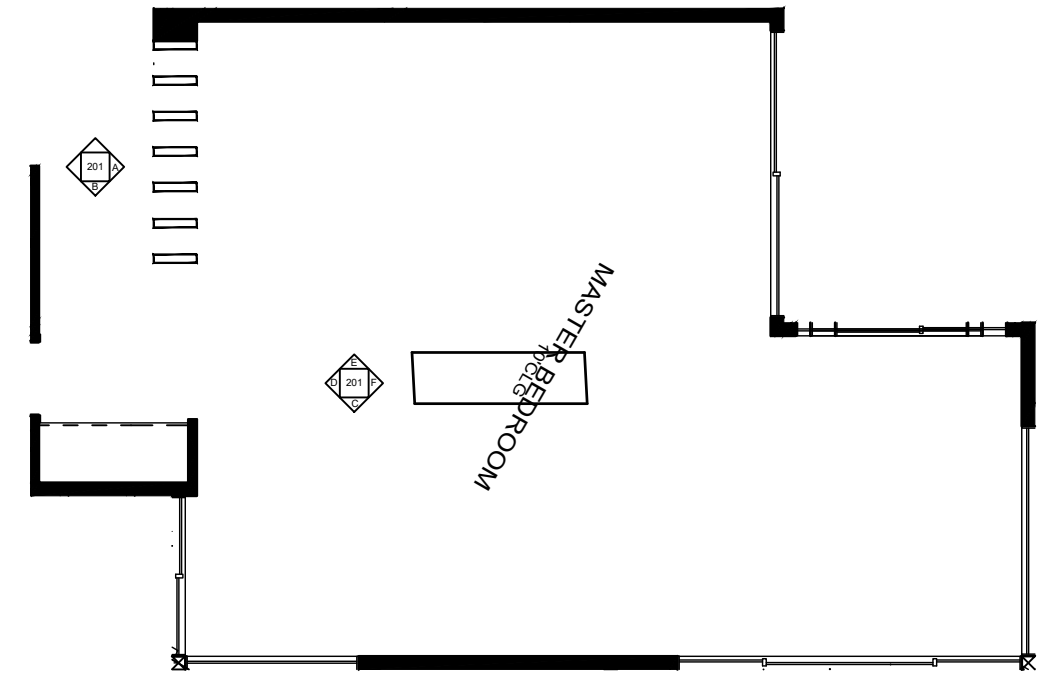


201 MASTER BEDROOM ELEVATION A

201 MASTER BEDROOM ELEVATION B

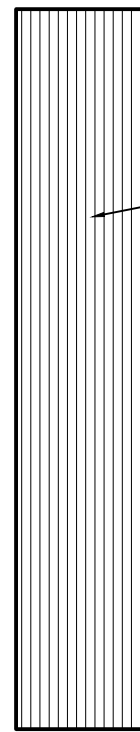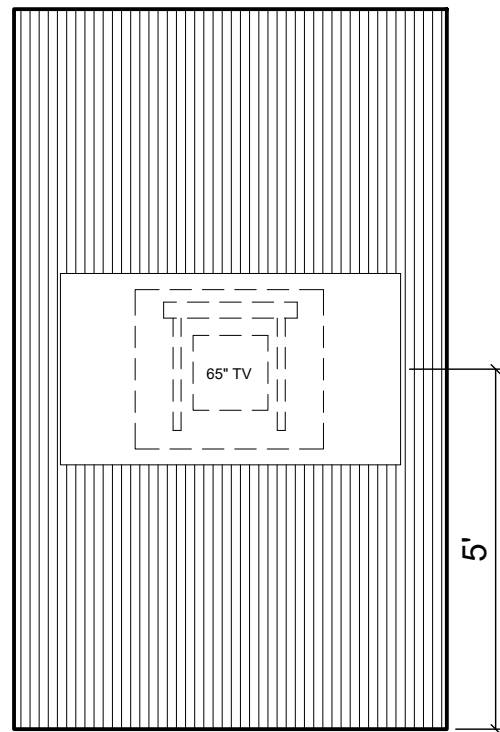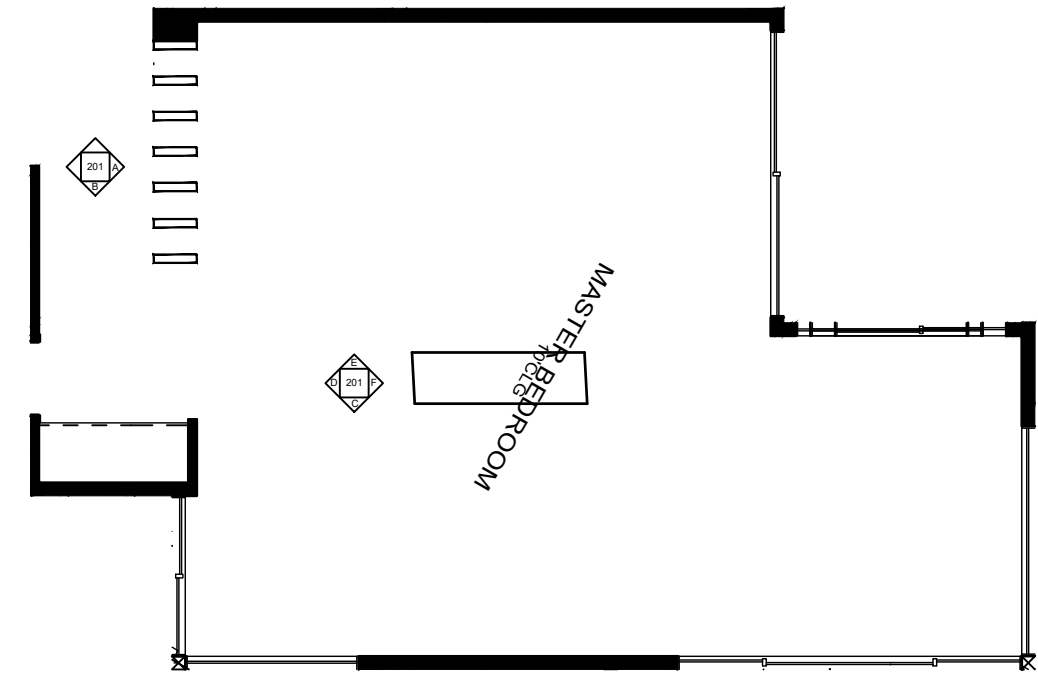

SLAT MILLWORK  
FINISH A

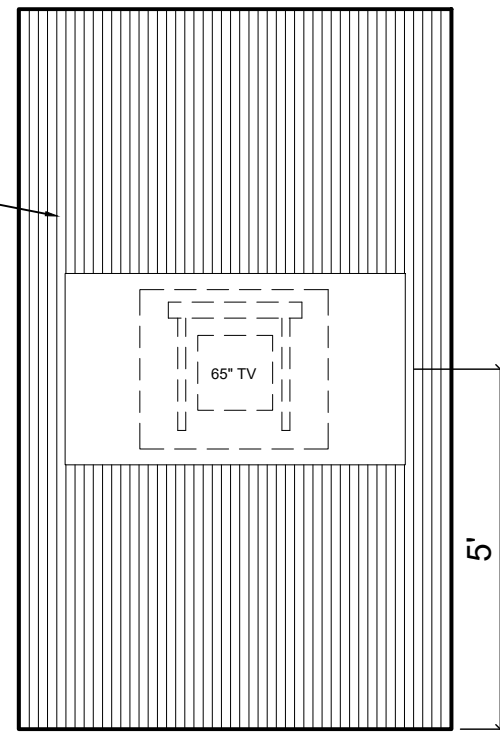



201 MASTER BEDROOM  
ELEVATION C

201 MASTER BEDROOM  
ELEVATION D


201 MASTER BEDROOM  
ELEVATION E

201 MASTER BEDROOM  
ELEVATION F





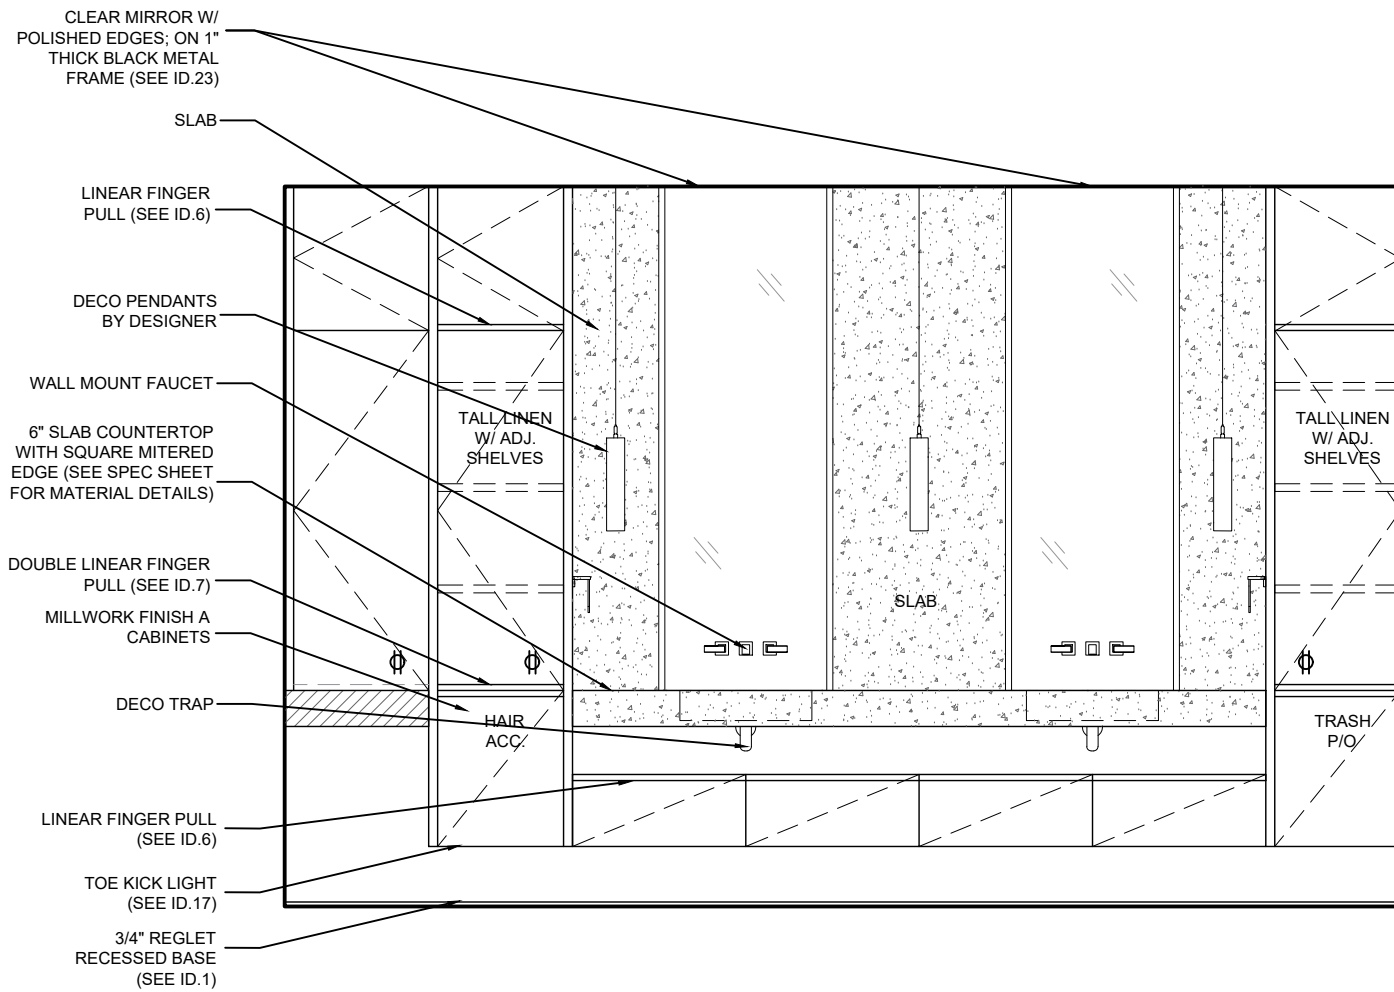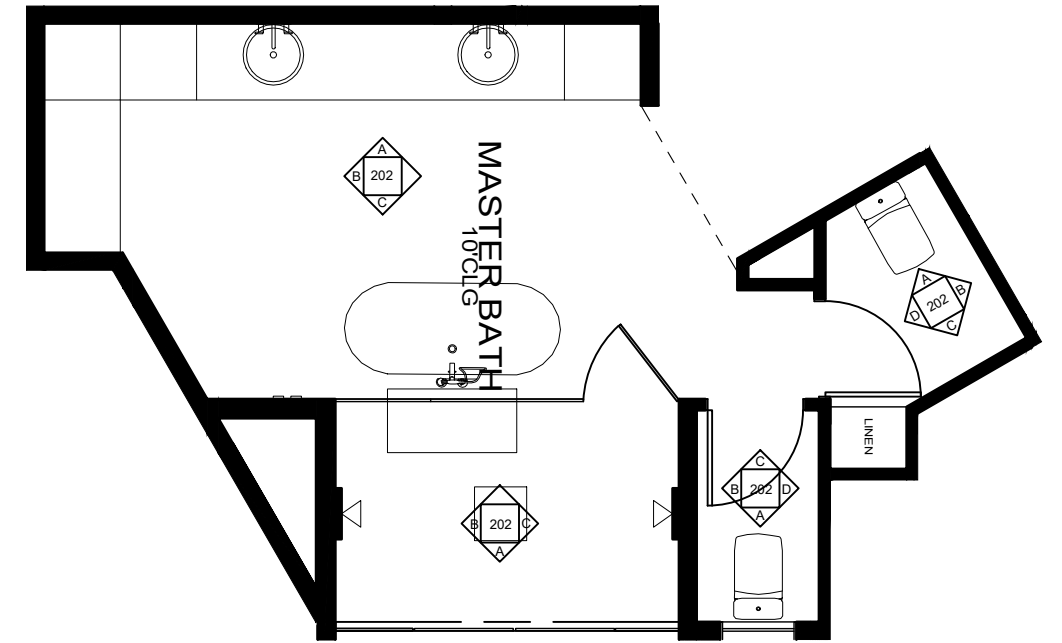



202 MASTER BATH - ELEVATION A

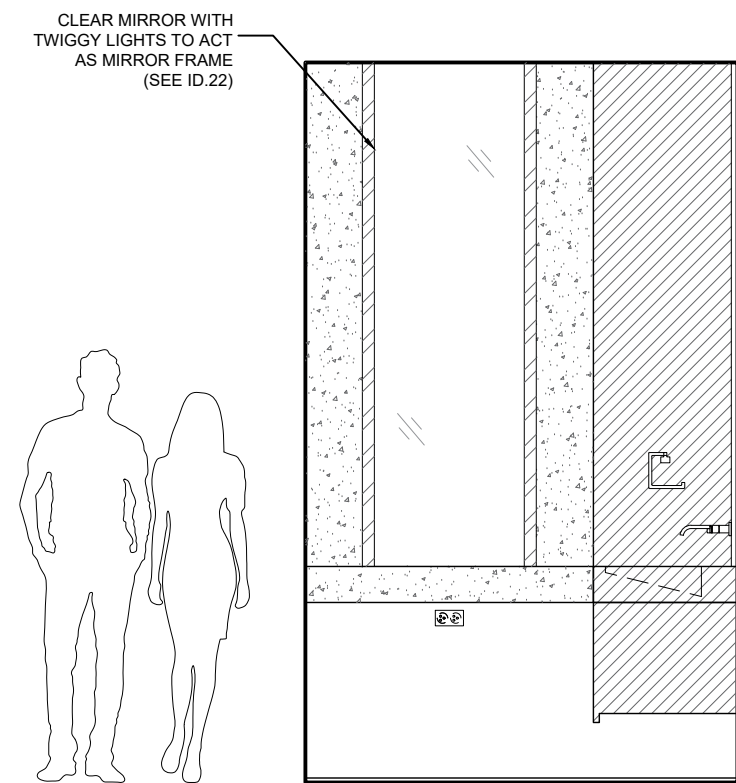


202 MASTER BATH - ELEVATION B

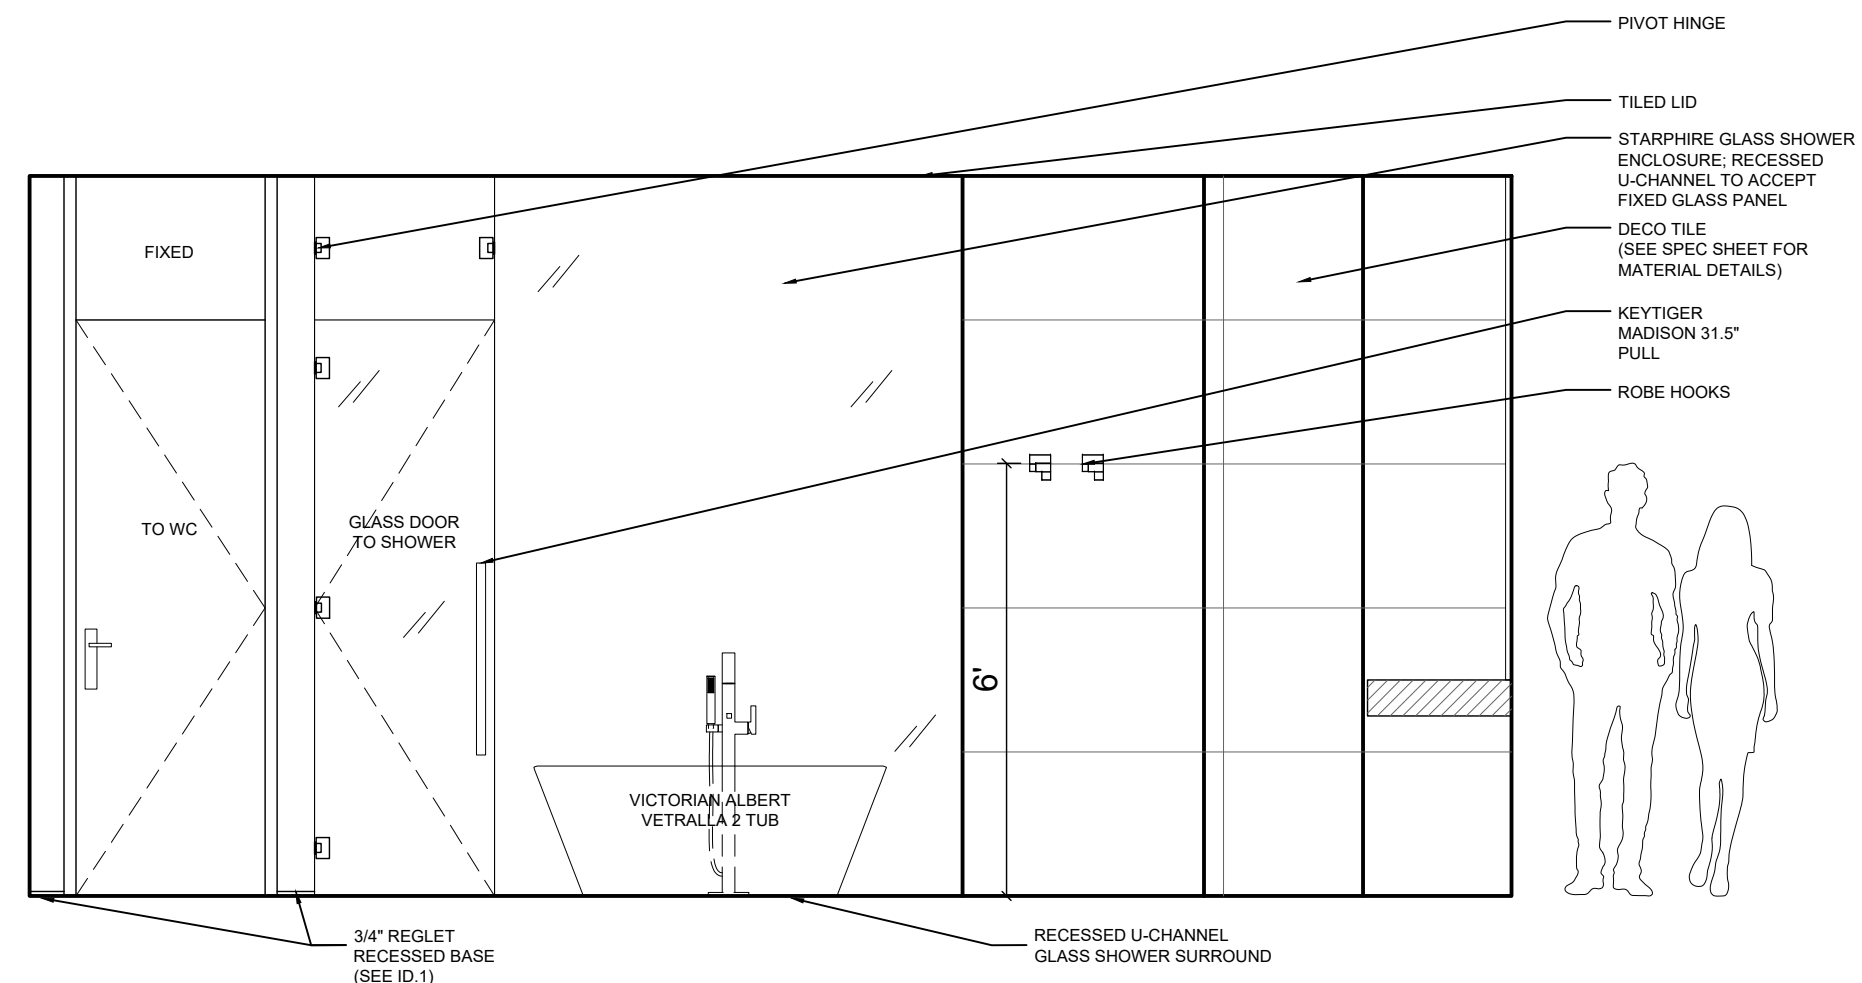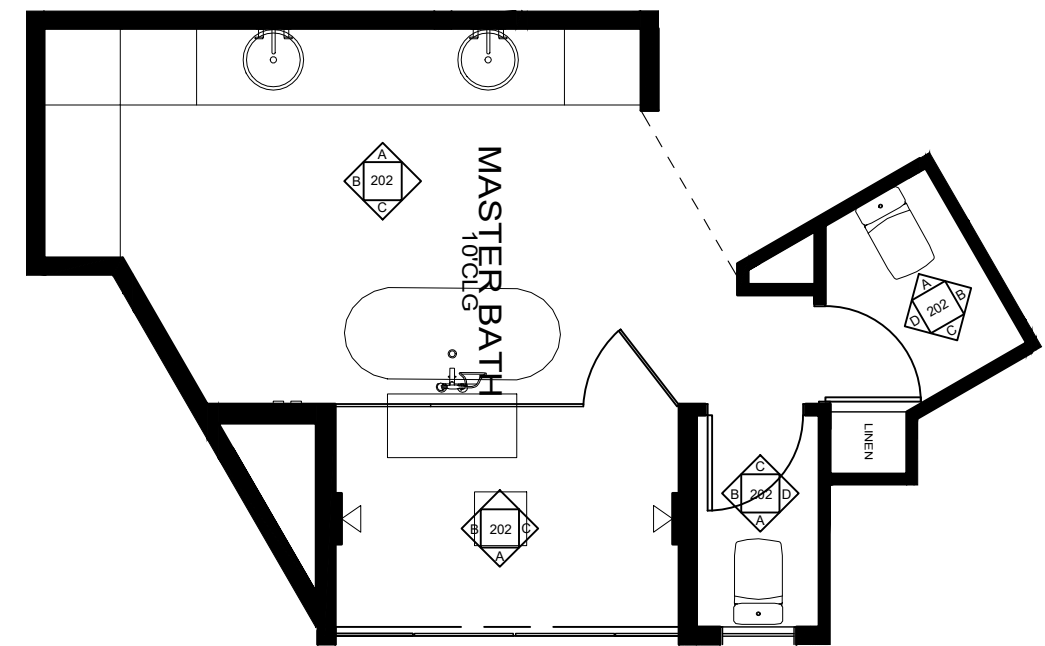


202 MASTER BATH - ELEVATION C

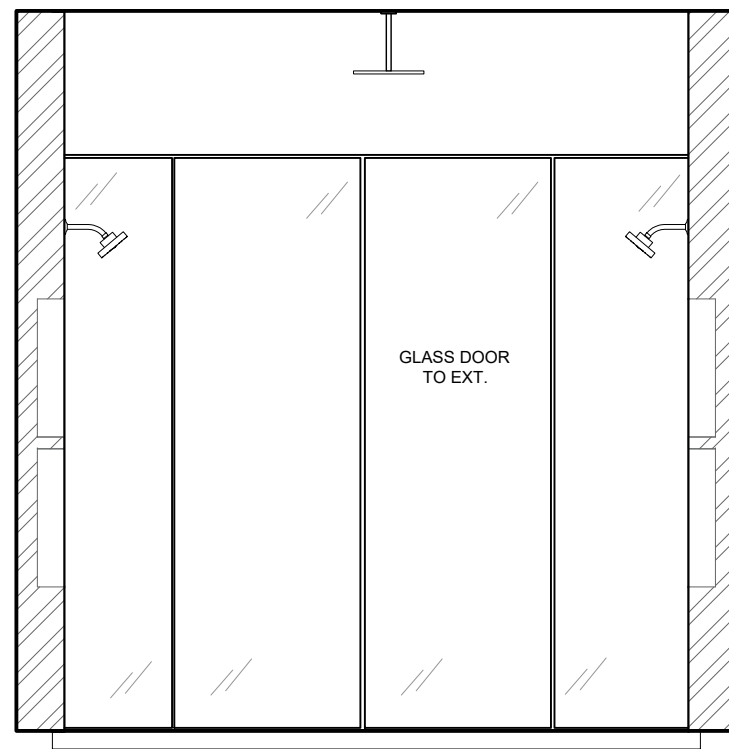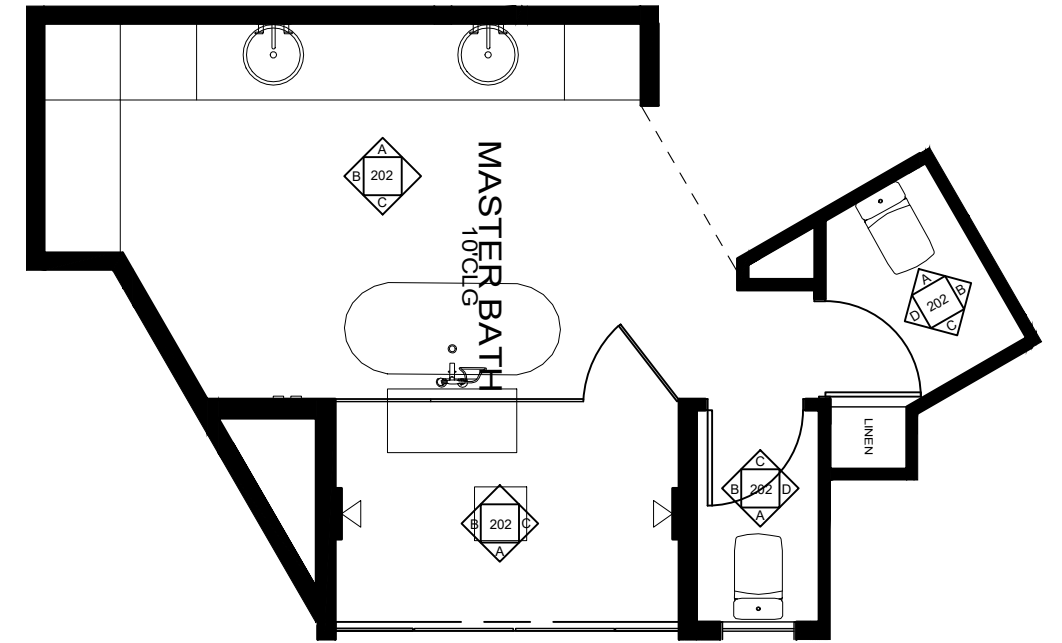





202 MASTER BATH - SHOWER  
ELEVATION A

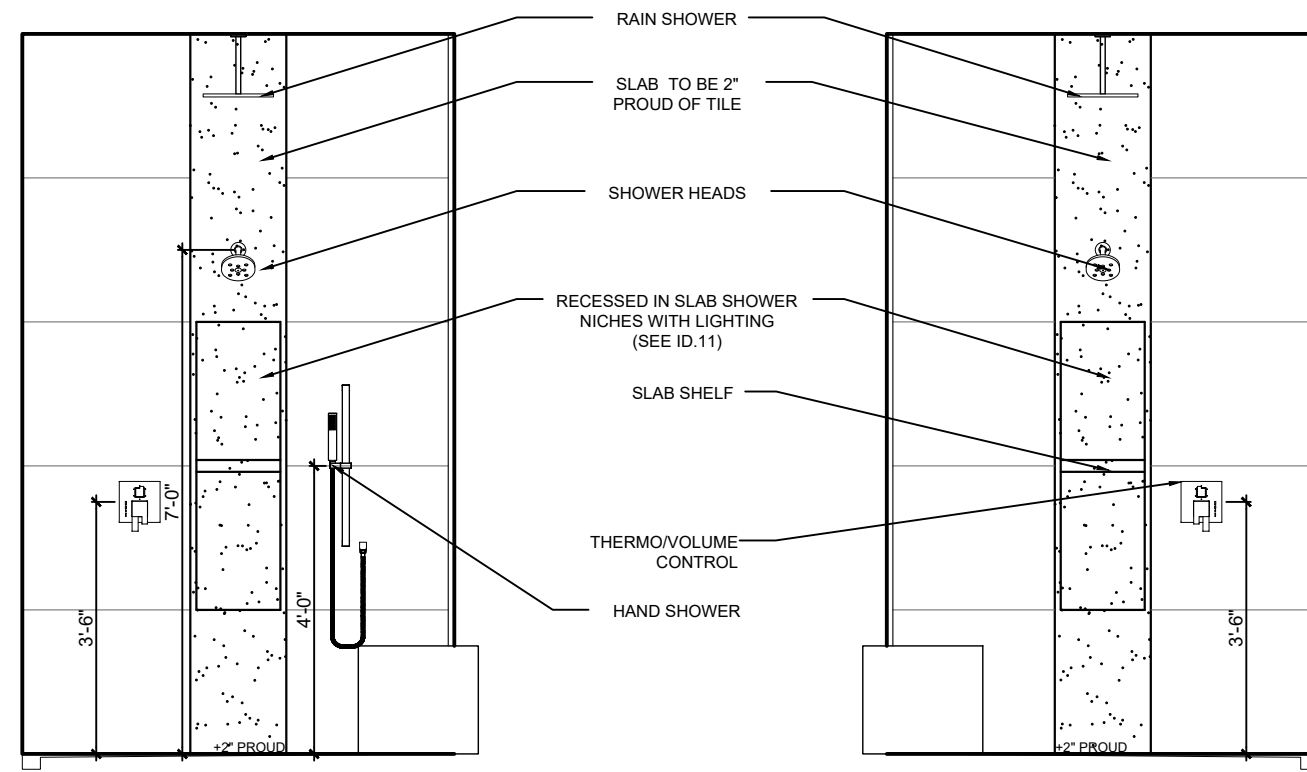

202 MASTER BATH - SHOWER  
ELEVATION B

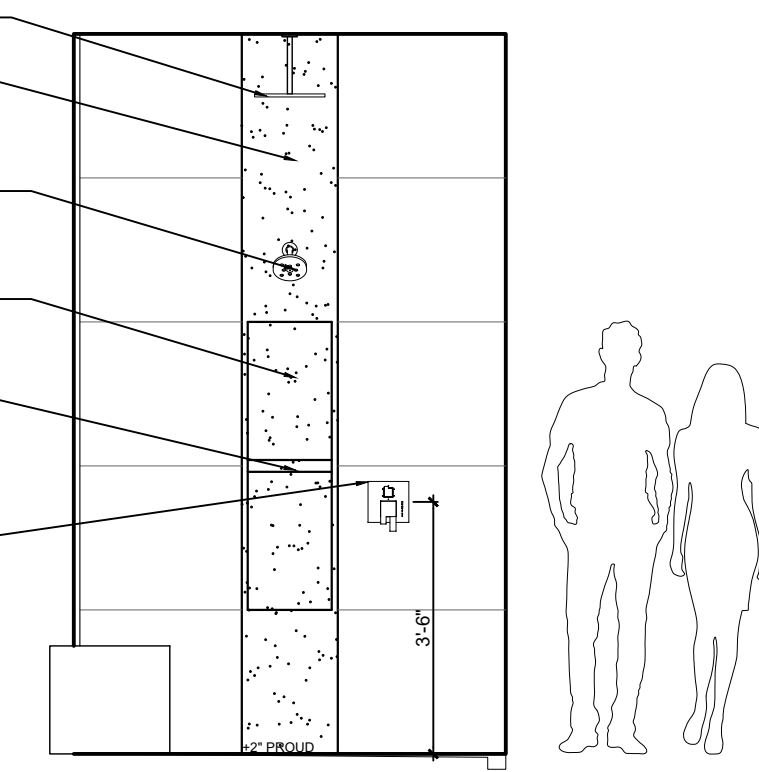

202 MASTER BATH - SHOWER  
ELEVATION C

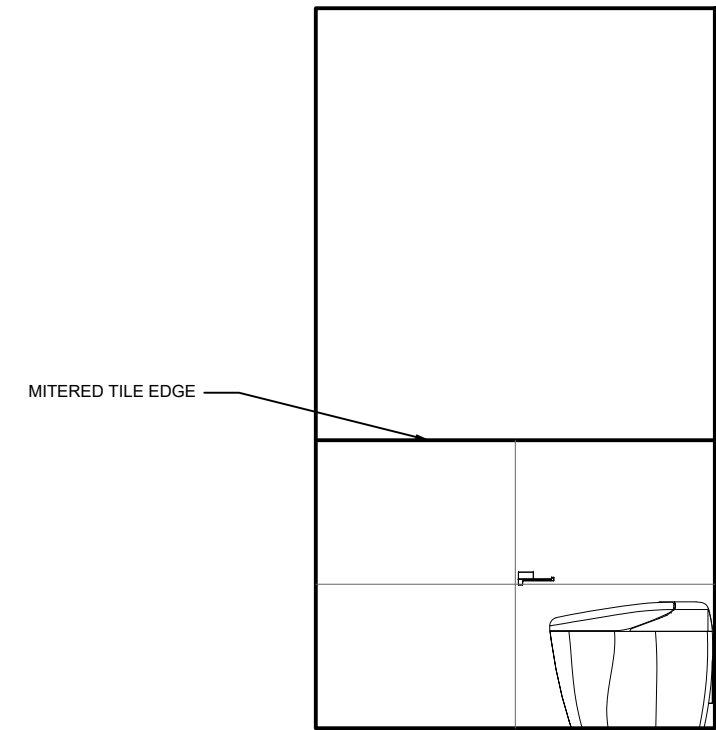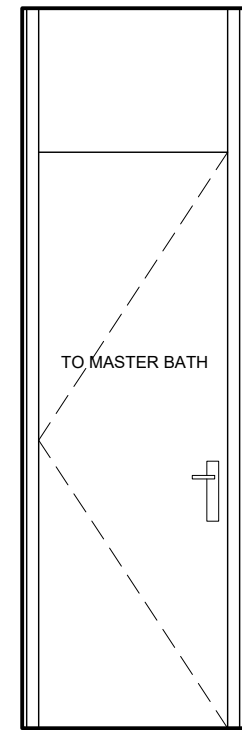
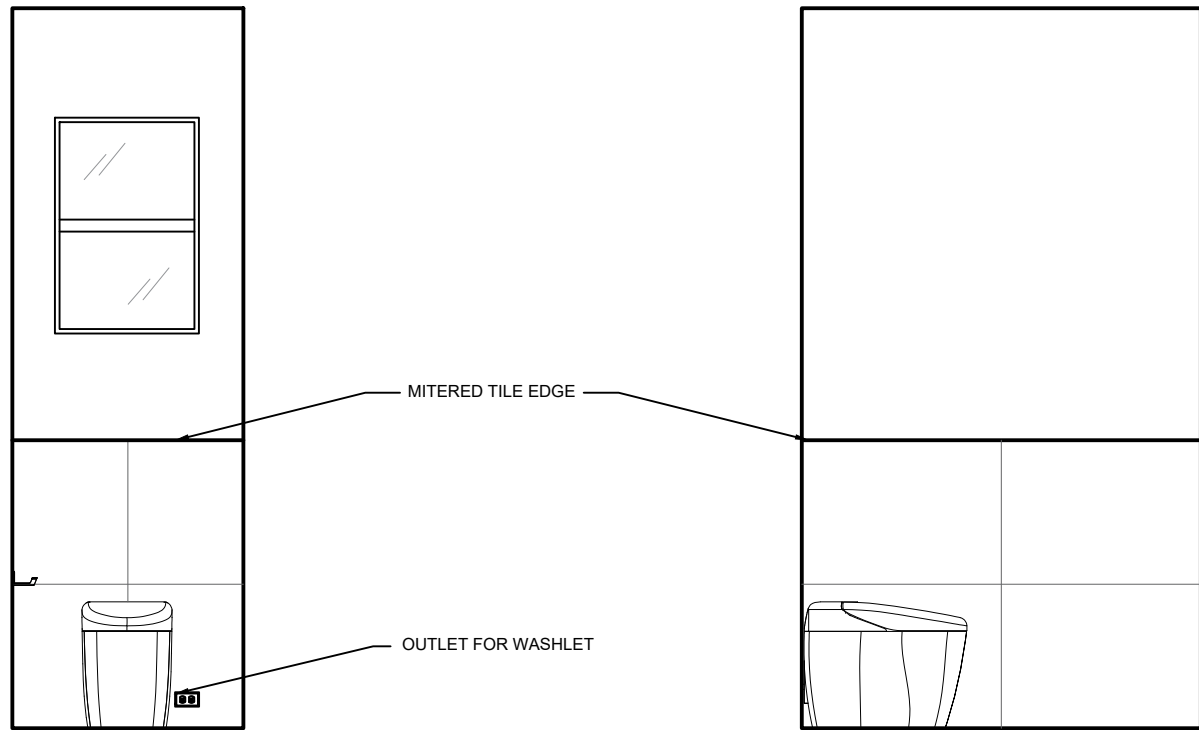
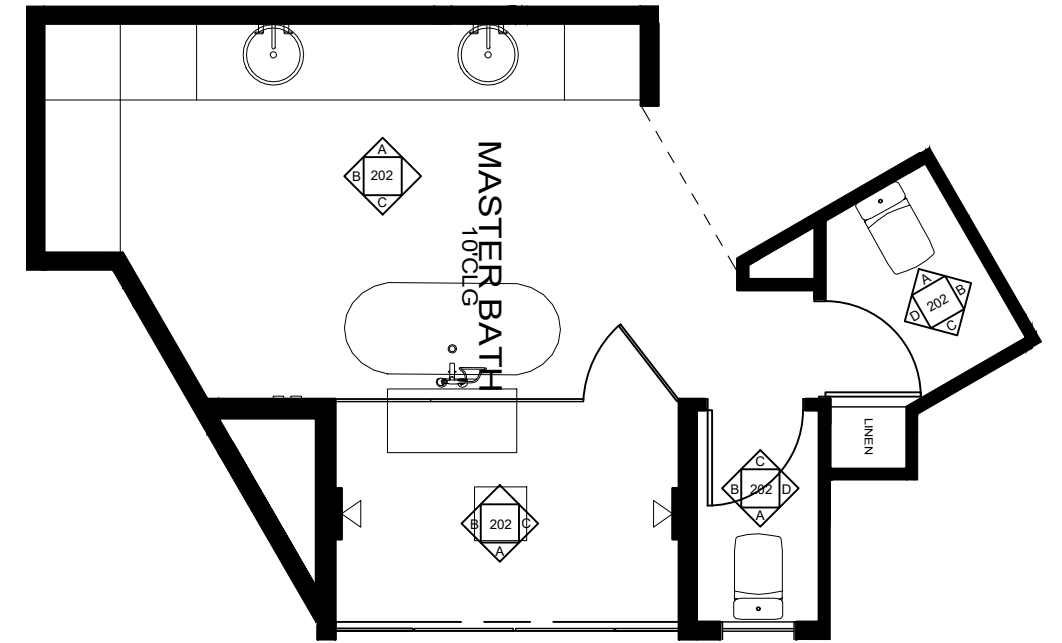


202 MASTER BATH - WC 1  
ELEVATION A

202 MASTER BATH - WC 1  
ELEVATION B

202 MASTER BATH - WC 1  
ELEVATION C

202 MASTER BATH - WC 1  
ELEVATION D

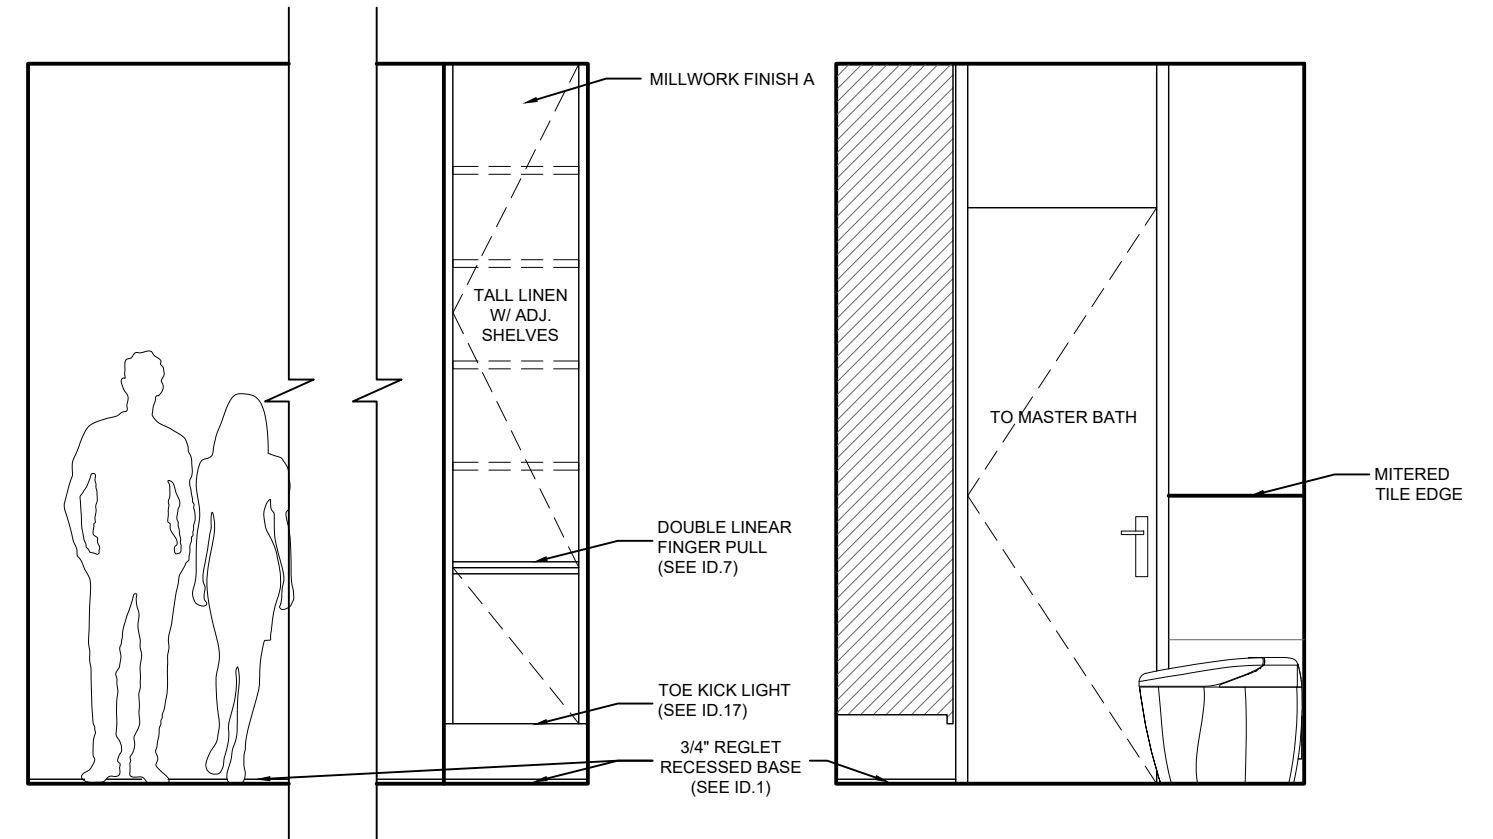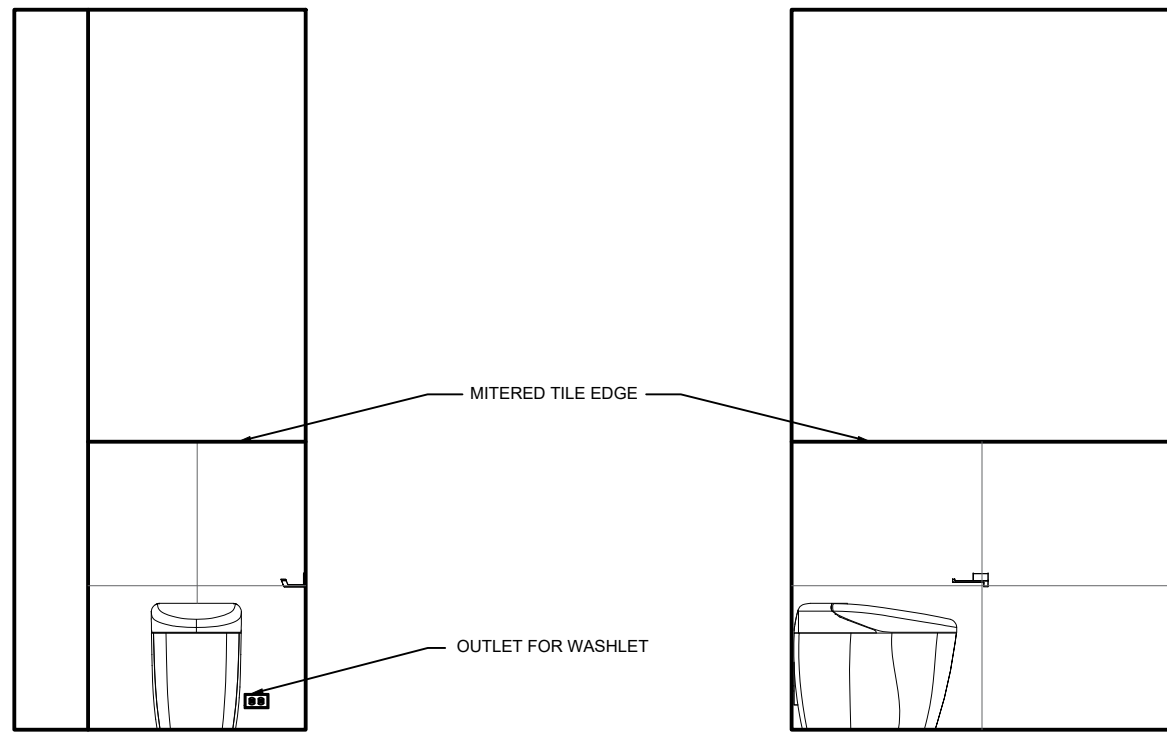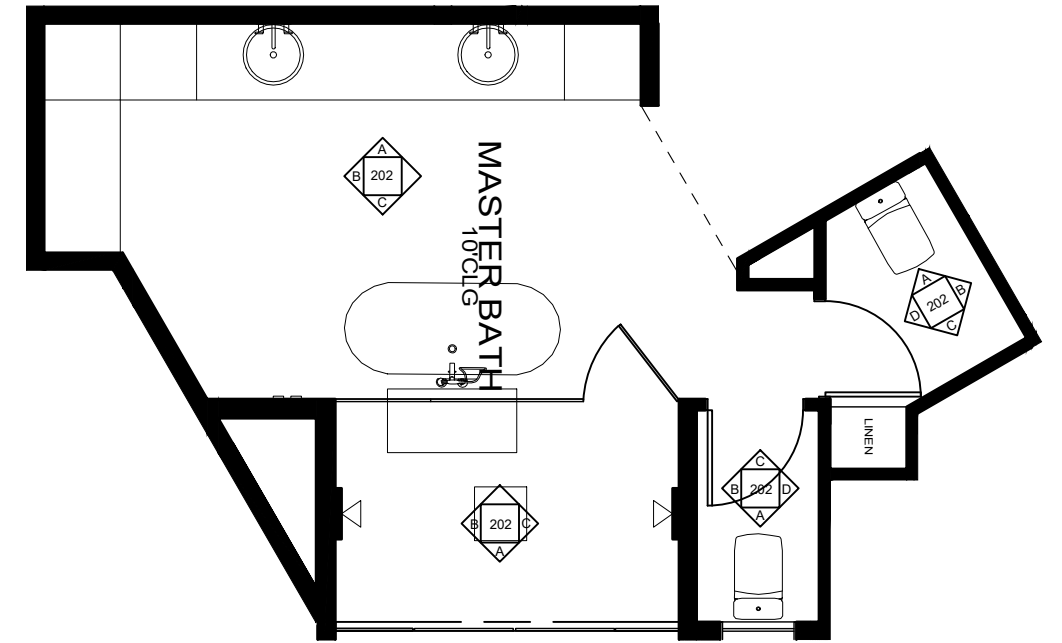




202 MASTER BATH - WC 2  
ELEVATION A

202 MASTER BATH - WC 2  
ELEVATION B

202 MASTER BATH - WC 2  
ELEVATION C




202 MASTER BATH - WC 2  
ELEVATION D



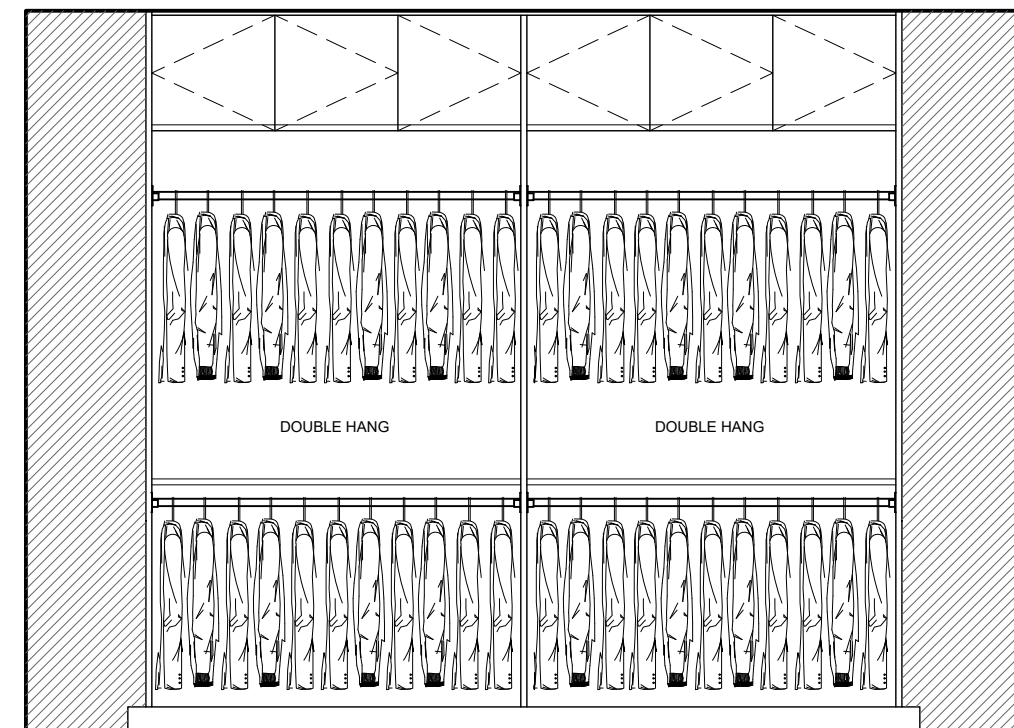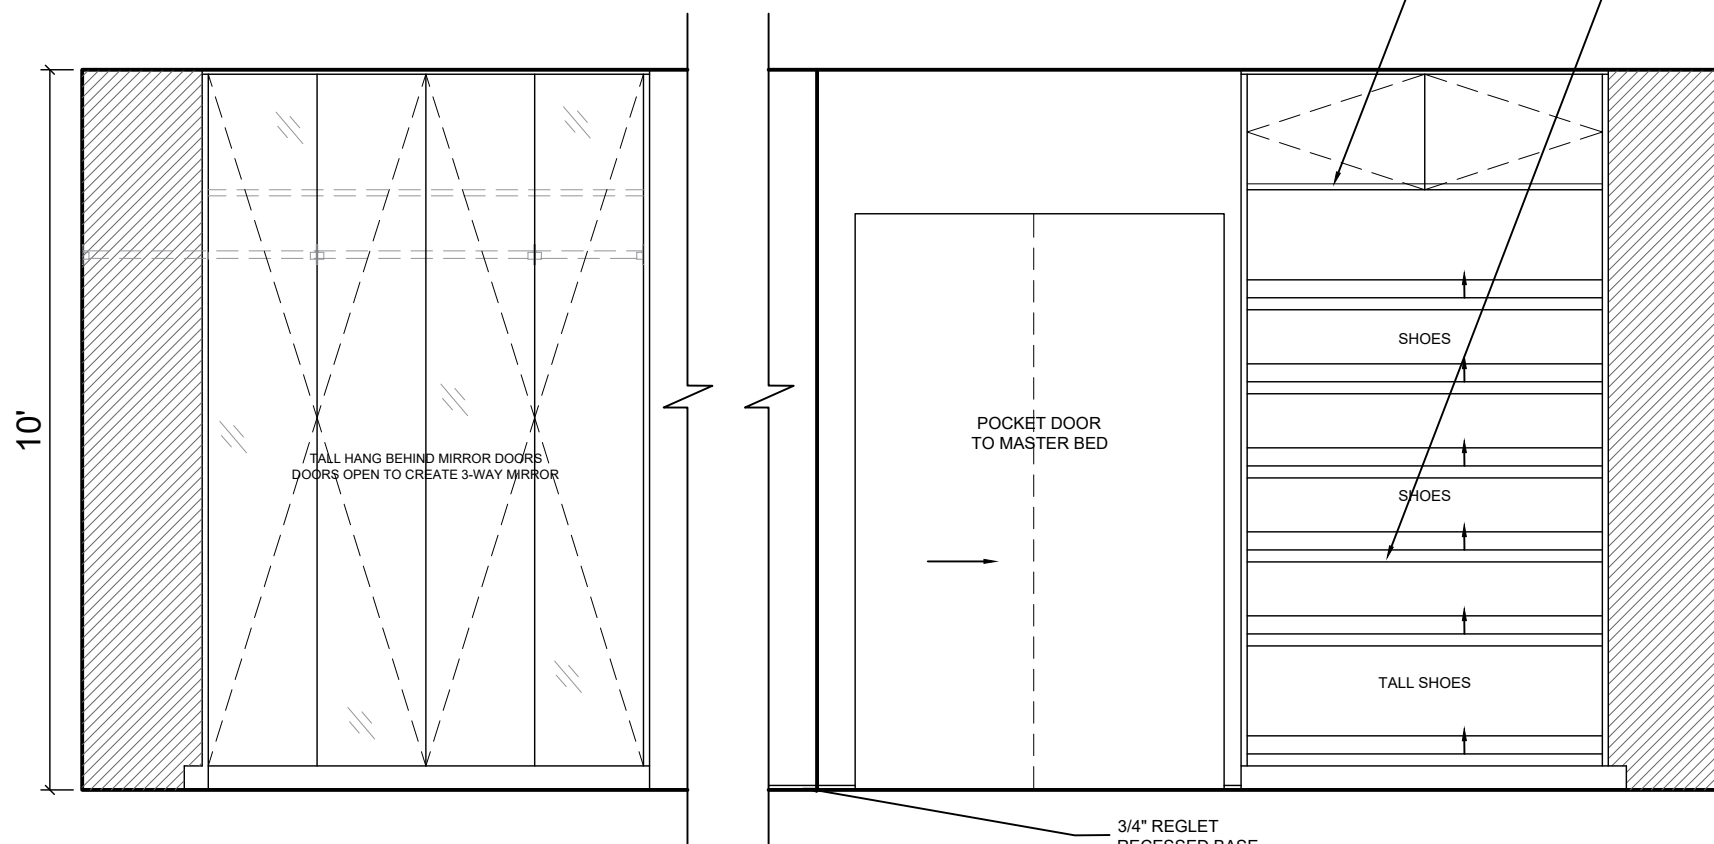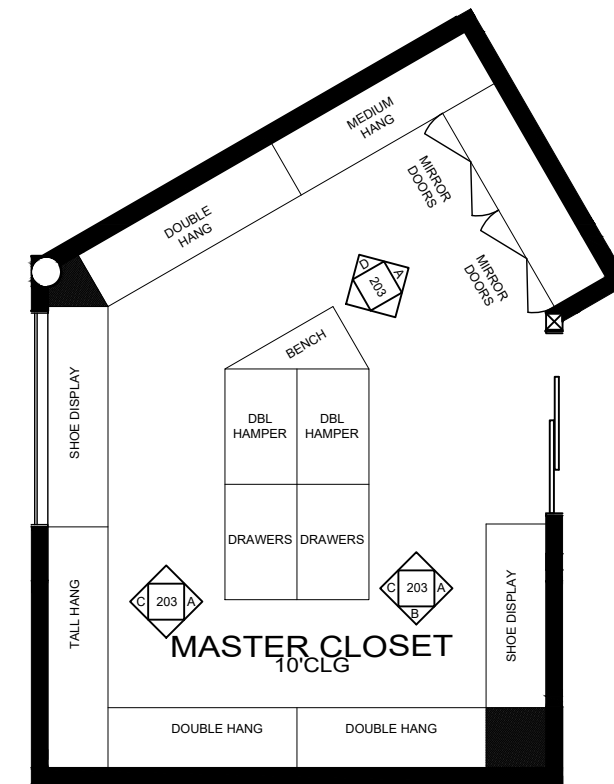


203 MASTER W.I.C - ELEVATION A

203 MASTER W.I.C - ELEVATION B

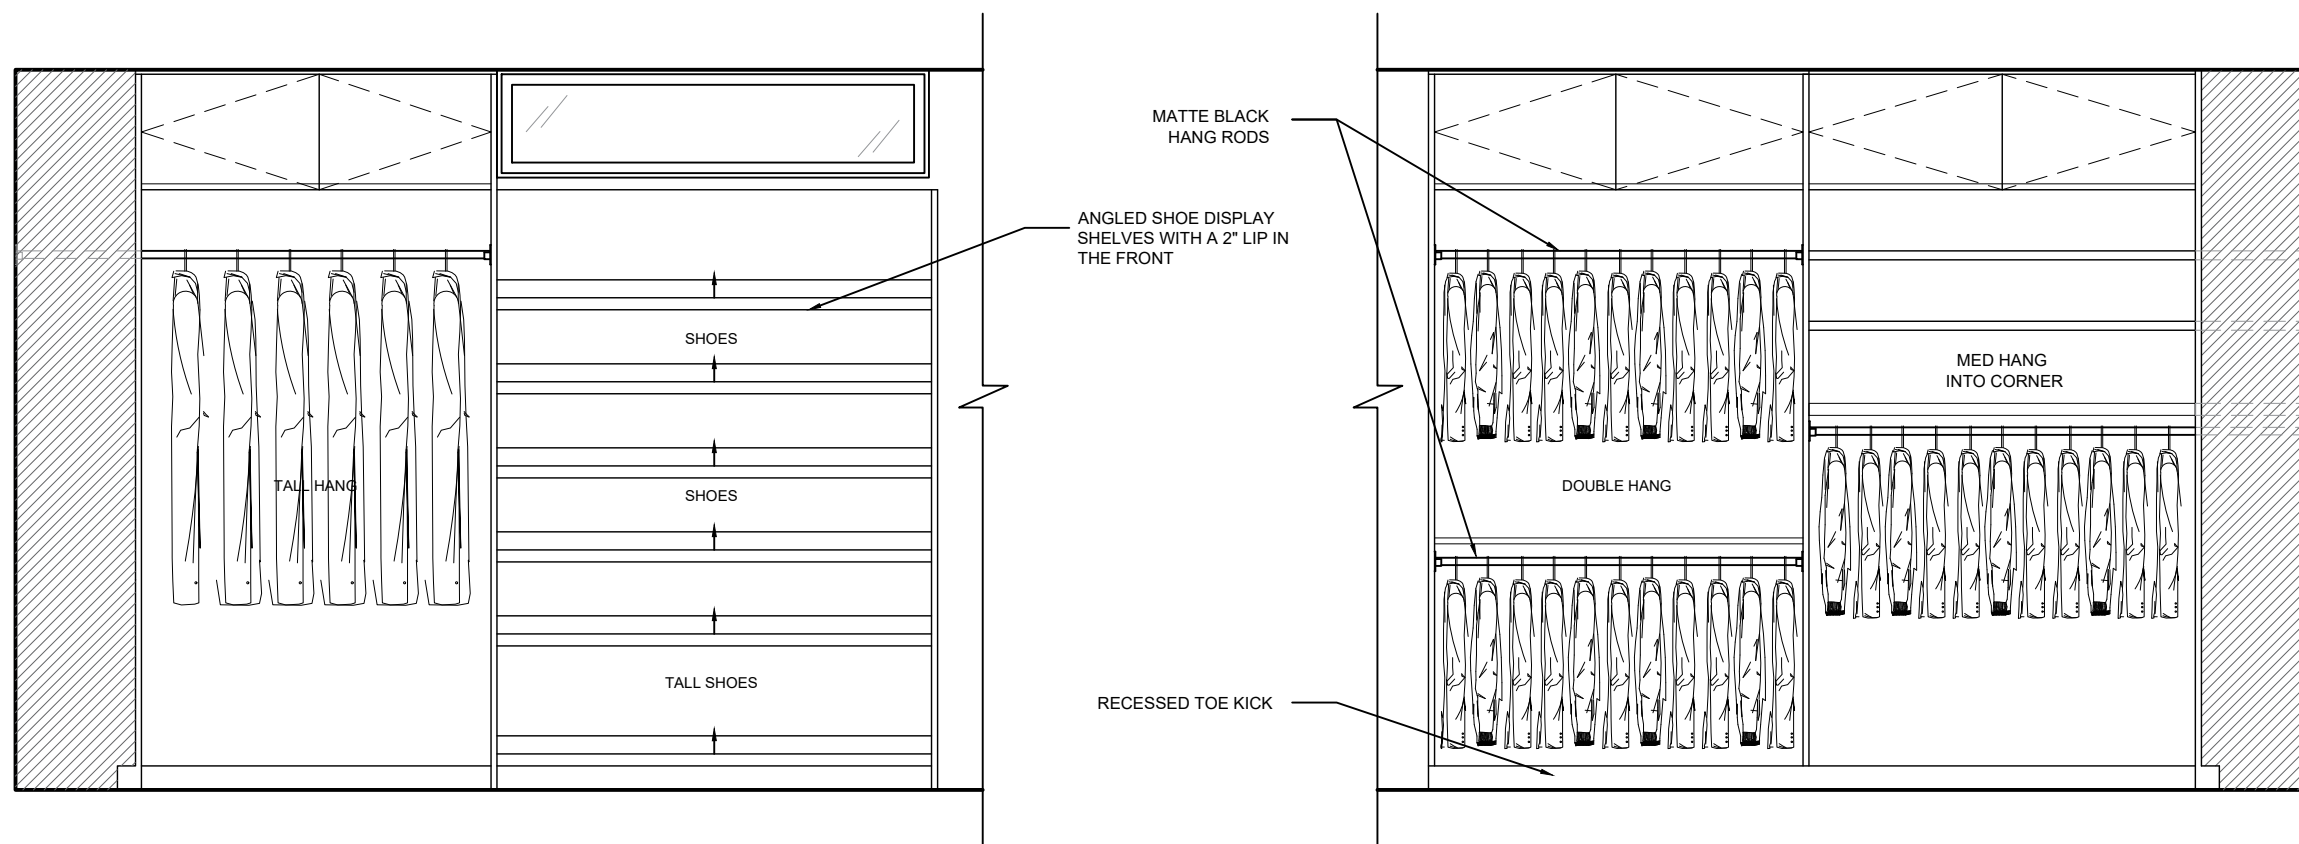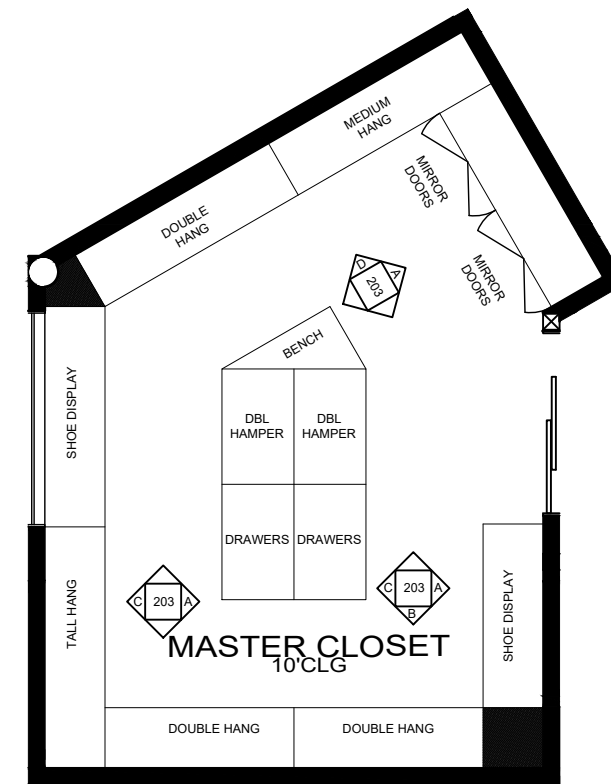


203 MASTER W.I.C - ELEVATION C


203 MASTER W.I.C - ELEVATION D

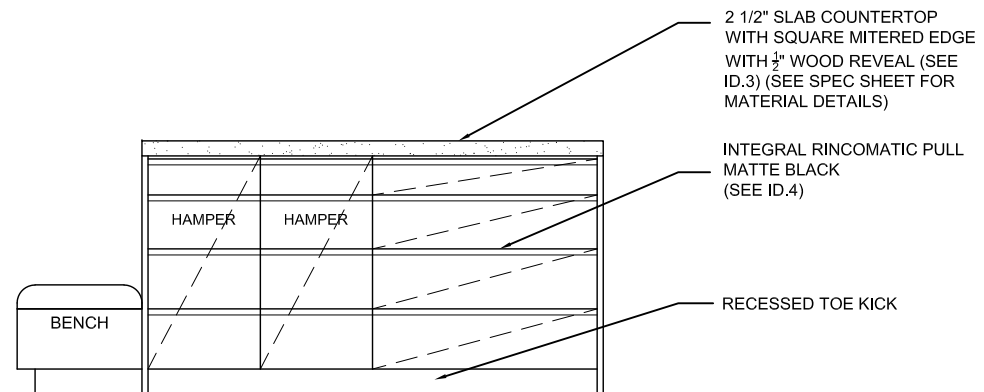


203 MASTER W.I.C - ISLAND - ELEVATION A

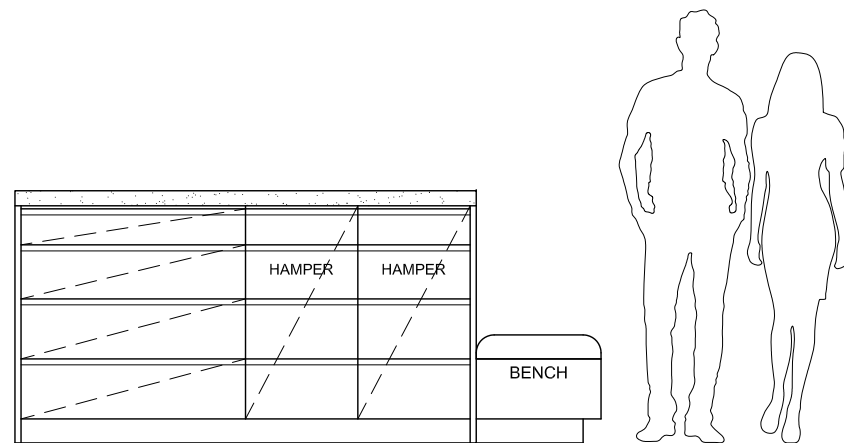


203 MASTER W.I.C - ISLAND - ELEVATION C


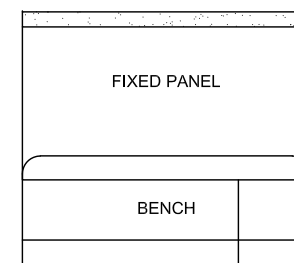


203 MASTER W.I.C - ISLAND - ELEVATION B

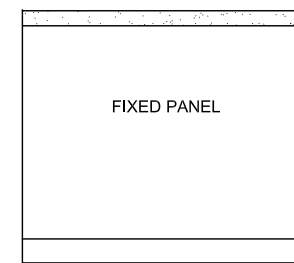





203 MASTER W.I.C - ISLAND - ELEVATION D

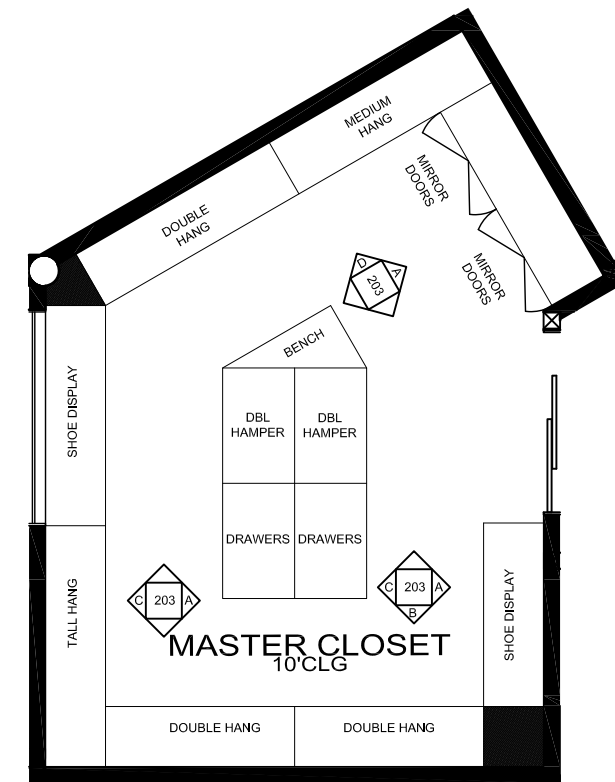

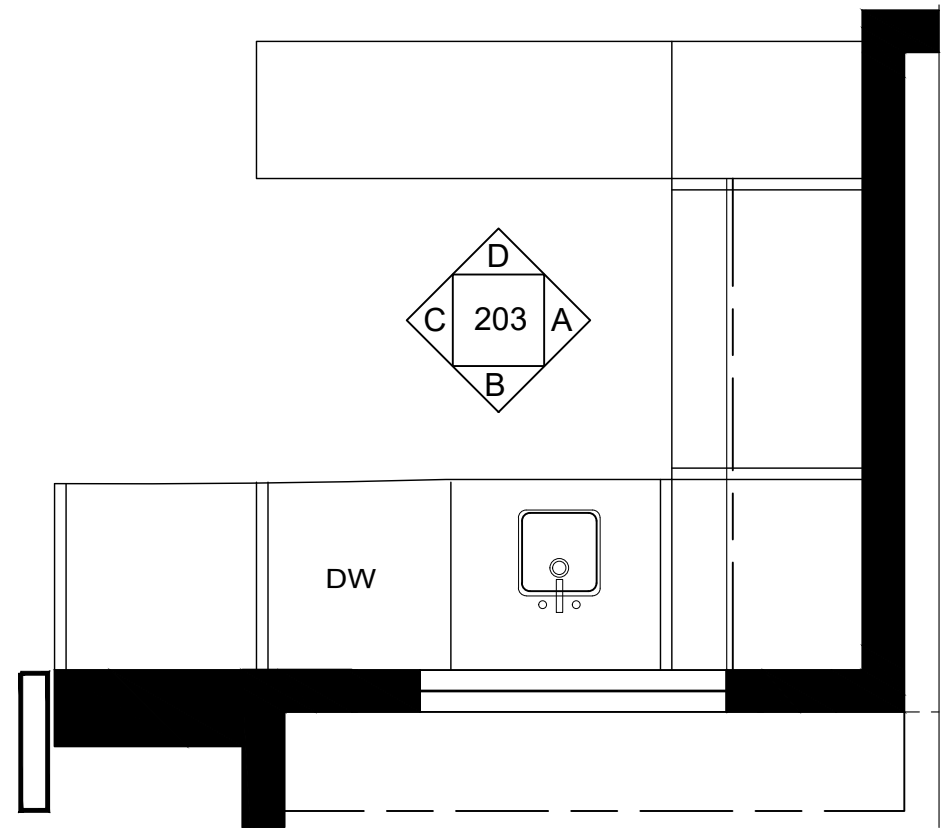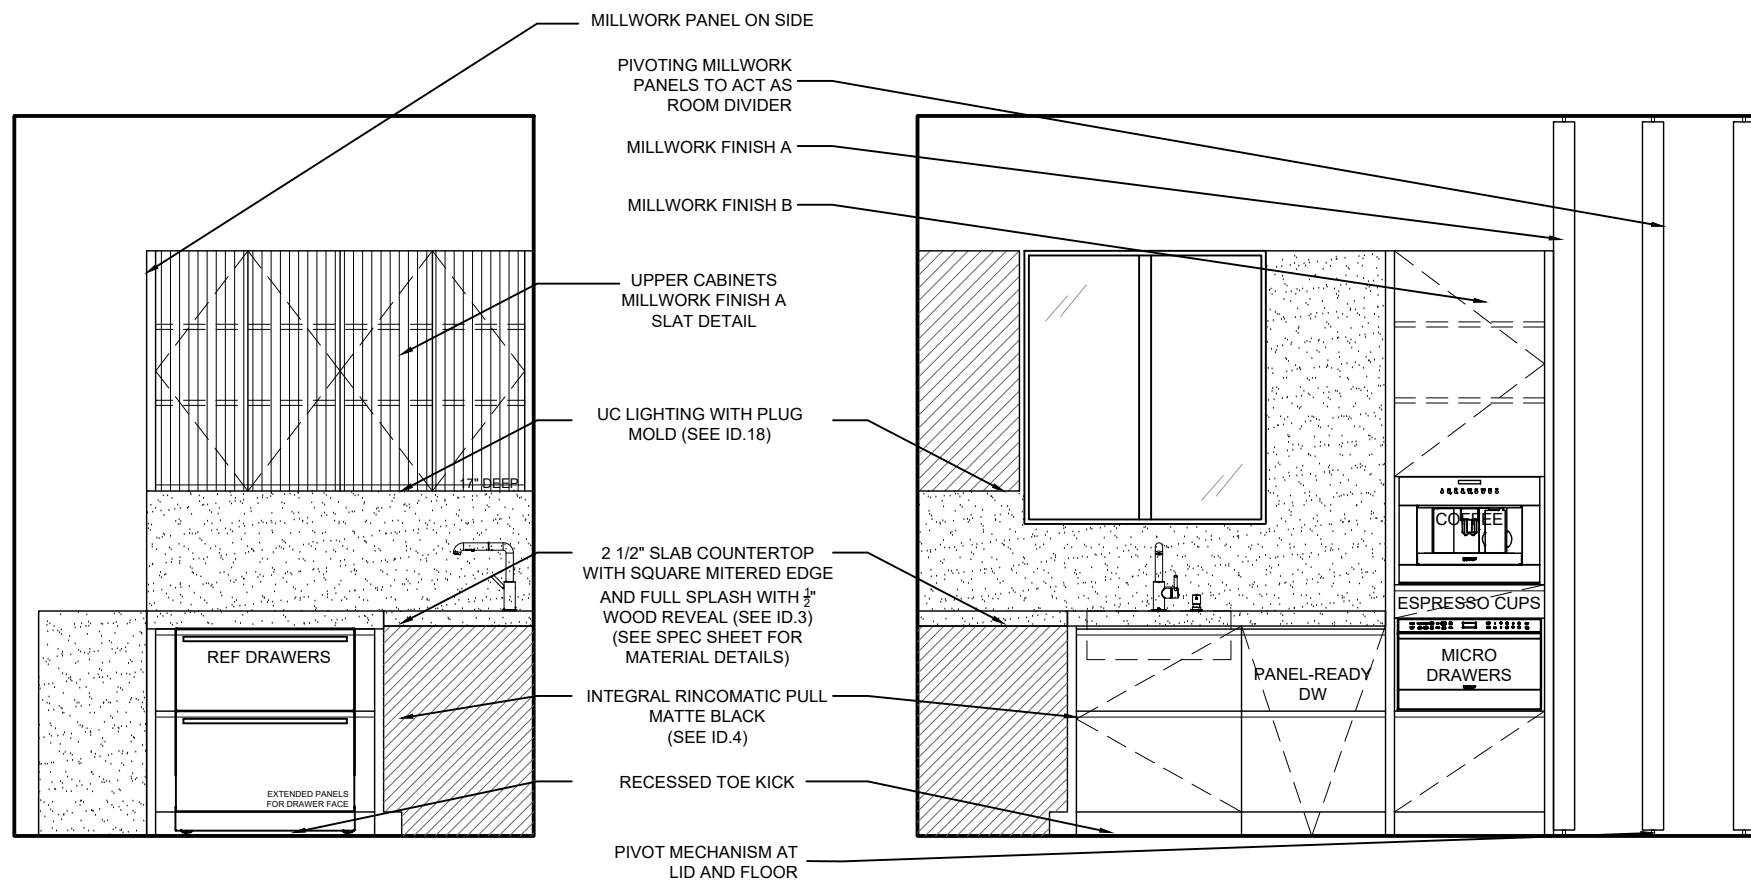

204 VIEWING LOFT - ELEVATION A



204 VIEWING LOFT - ELEVATION B

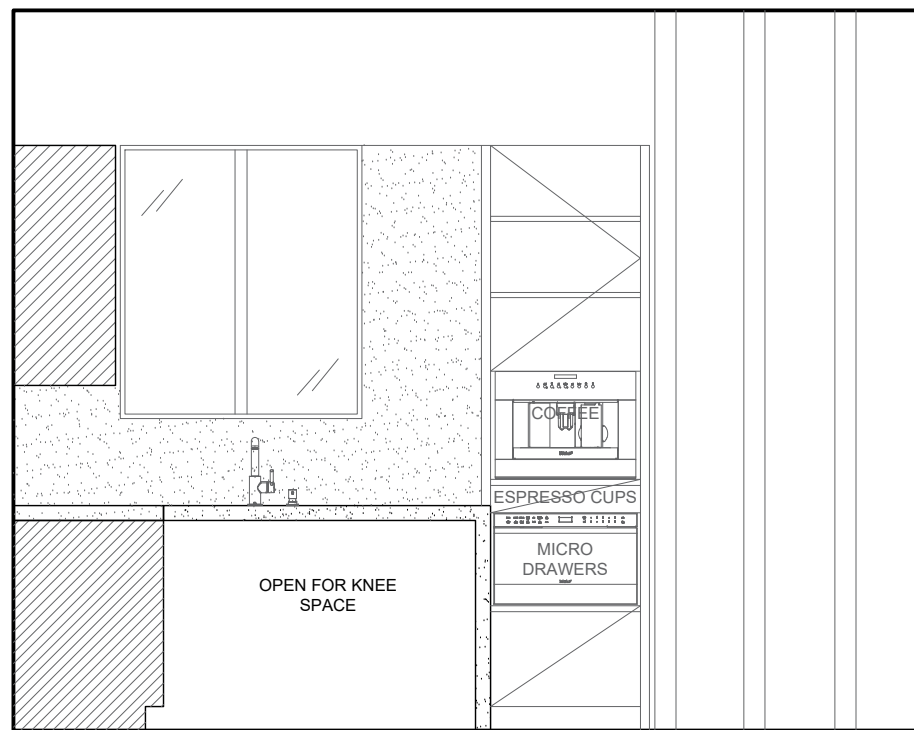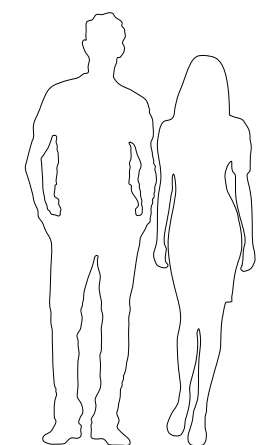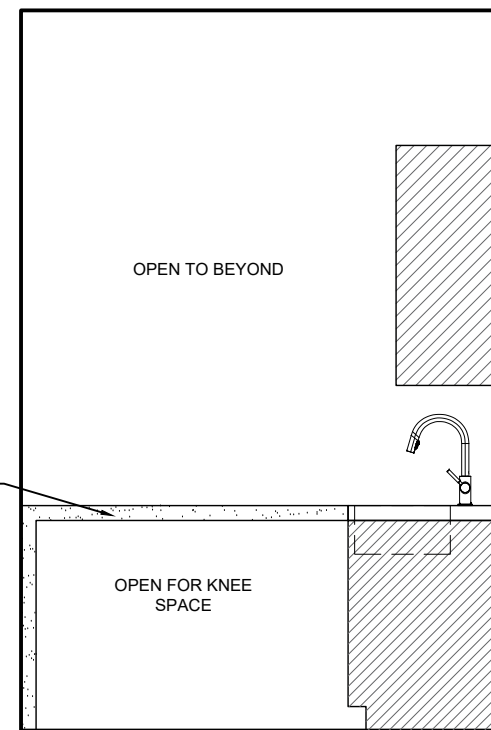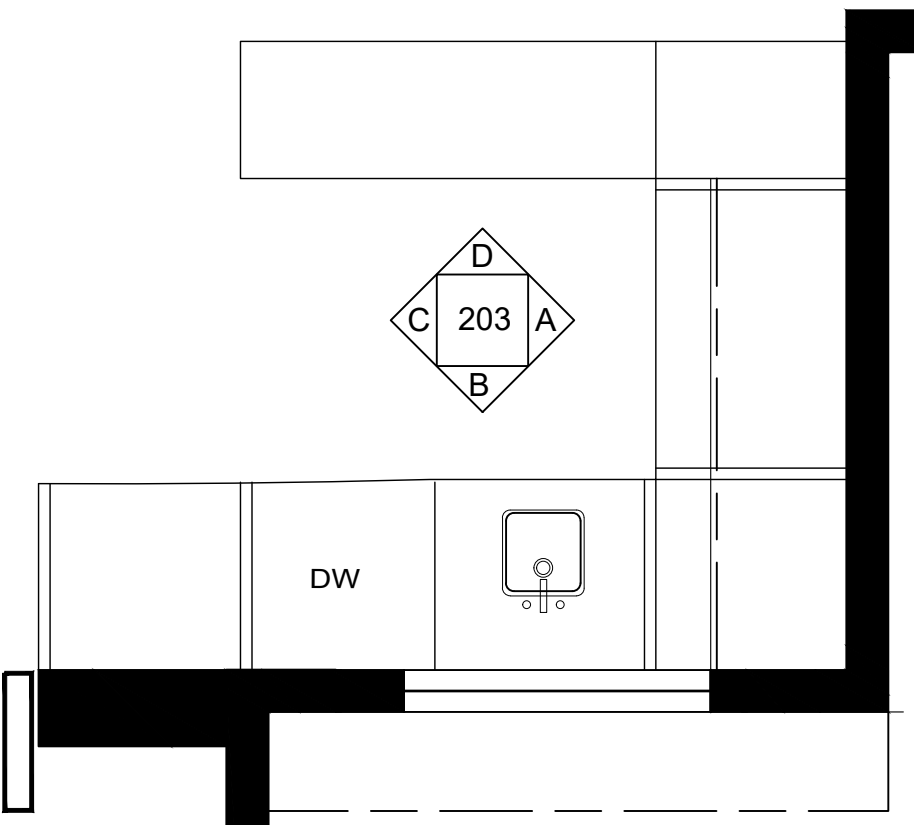

204 VIEWING LOFT - ELEVATION D


204 VIEWING LOFT - ELEVATION D



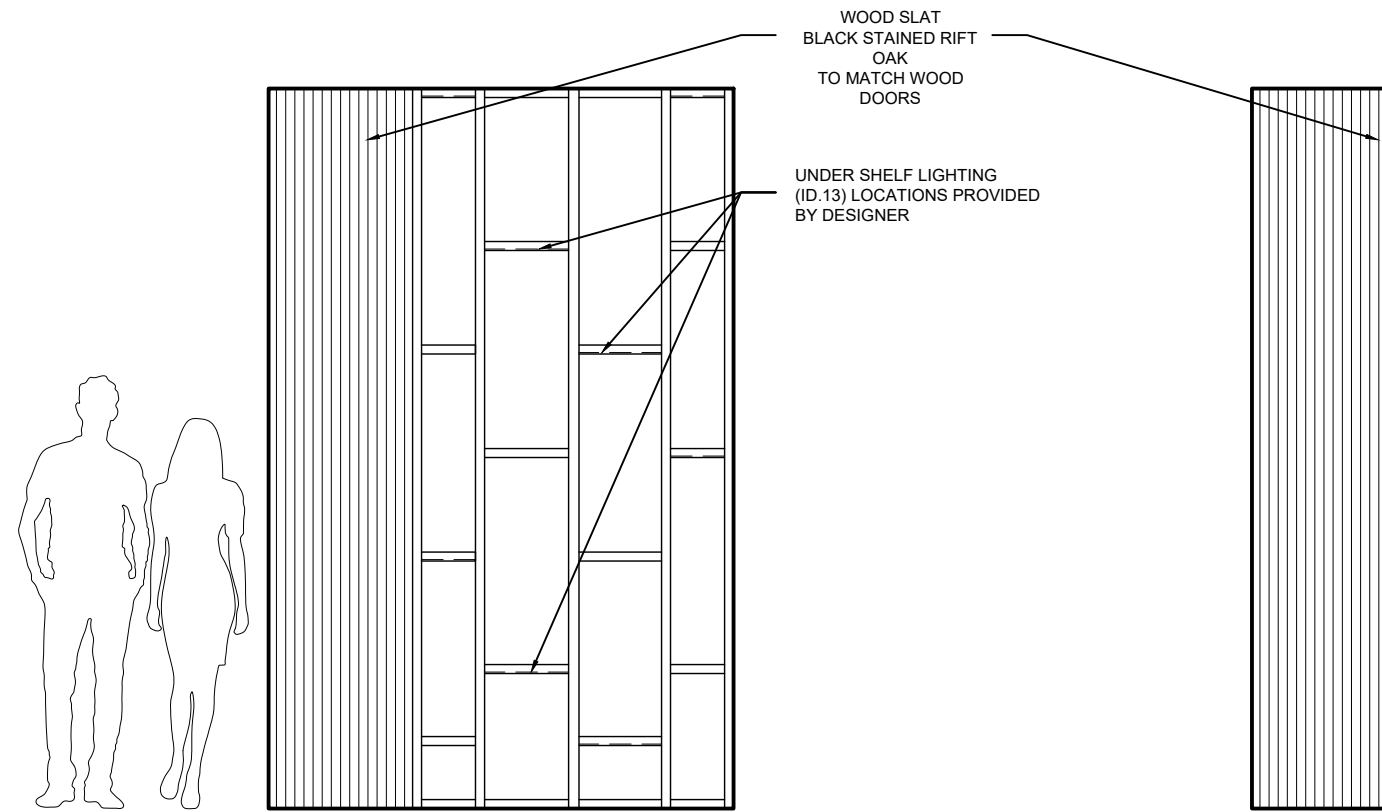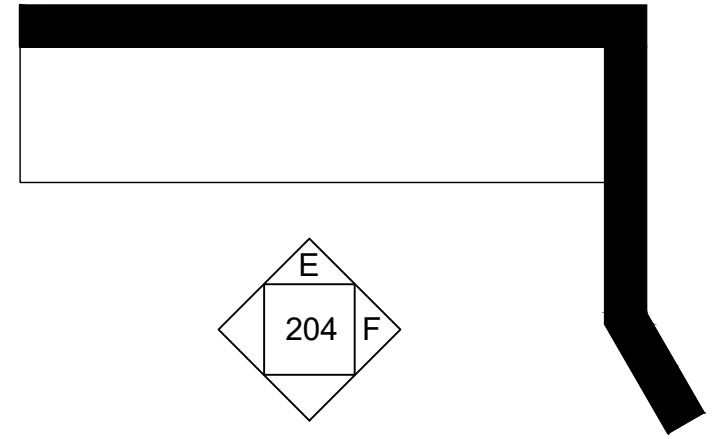


204 VIEWING LOFT - ELEVATION E

204 VIEWING LOFT - ELEVATION F

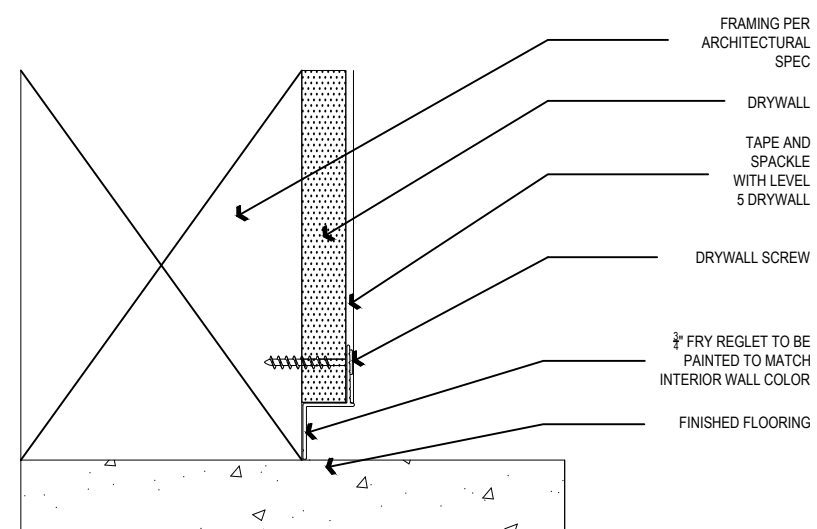


(TYP) 3/4" REGLET RECESSED BASE

ID.1  
SCALE: NTS

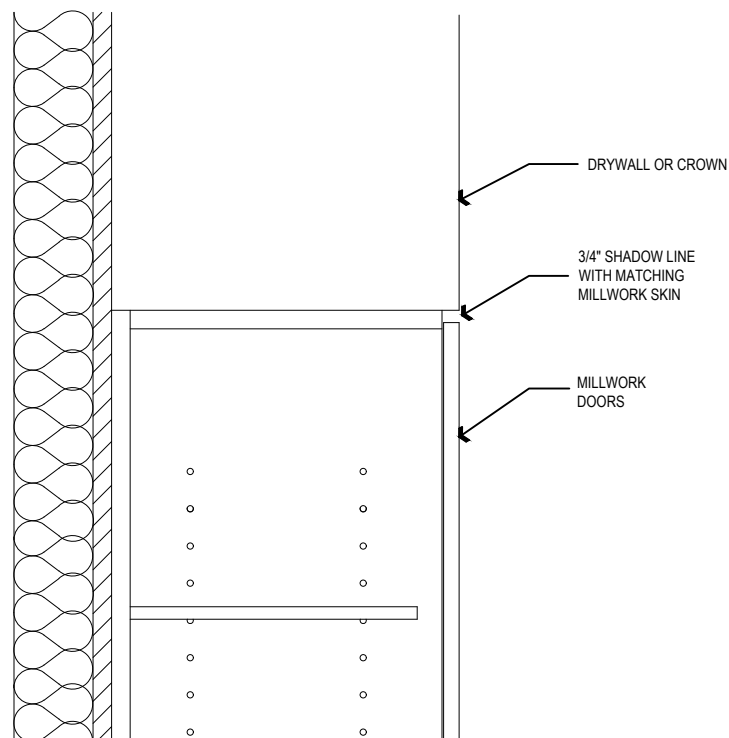


3/4" SHADOW LINE

ID.2  
SCALE: NTS

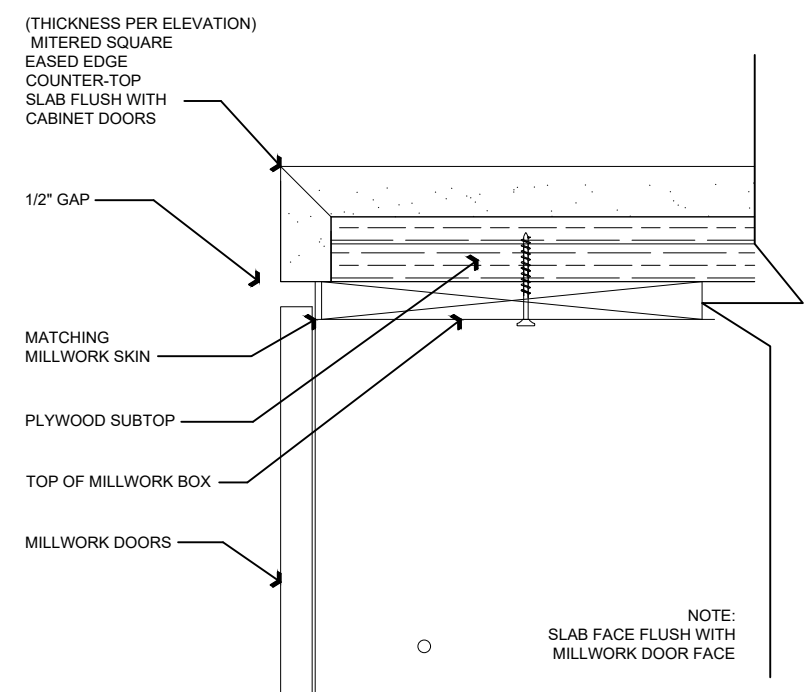


COUNTERTOP EDGE WITH MILLWORK REVEAL

ID.3  
SCALE: NTS

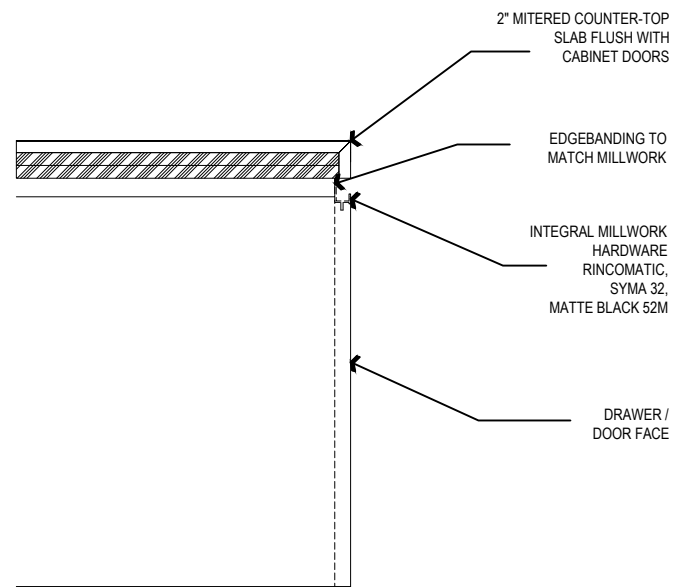


**INTEGRAL RINCOMATIC FINGER PULL**

ID.4  
SCALE: NTS

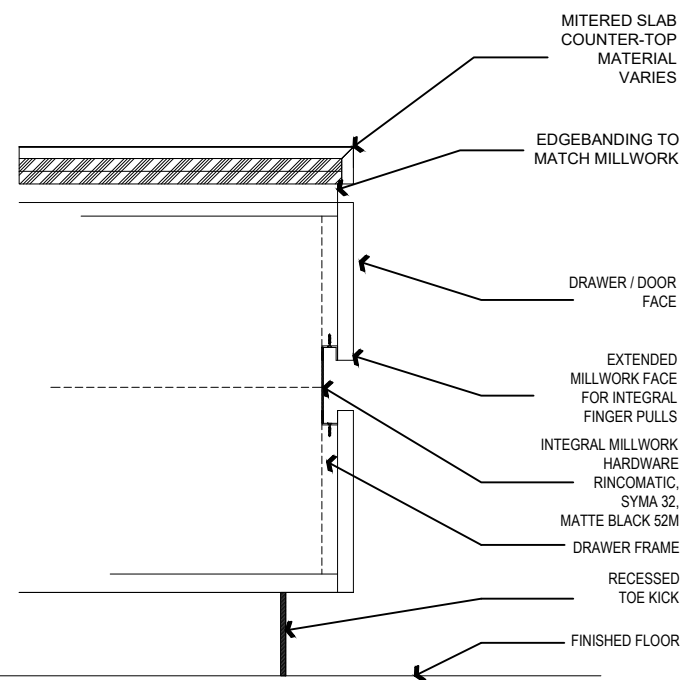


**DOUBLE INTEGRAL RINCOMATIC FINGER PULL**

ID.5  
SCALE: NTS

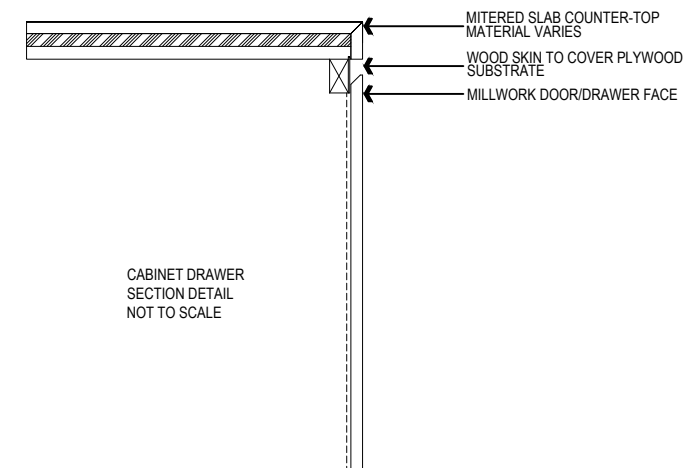

**LINEAR FINGER PULL**


ID.6  
SCALE: NTS

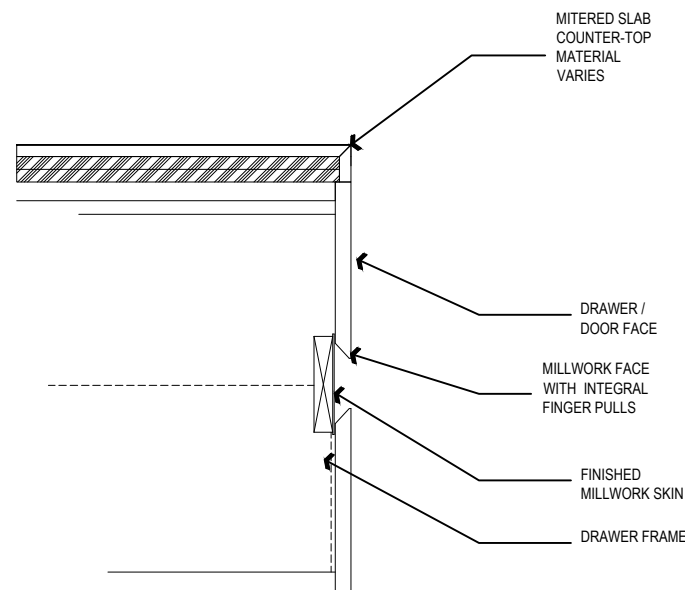

**DOUBLE LINEAR FINGER PULL**

ID.7


SCALE: NTS

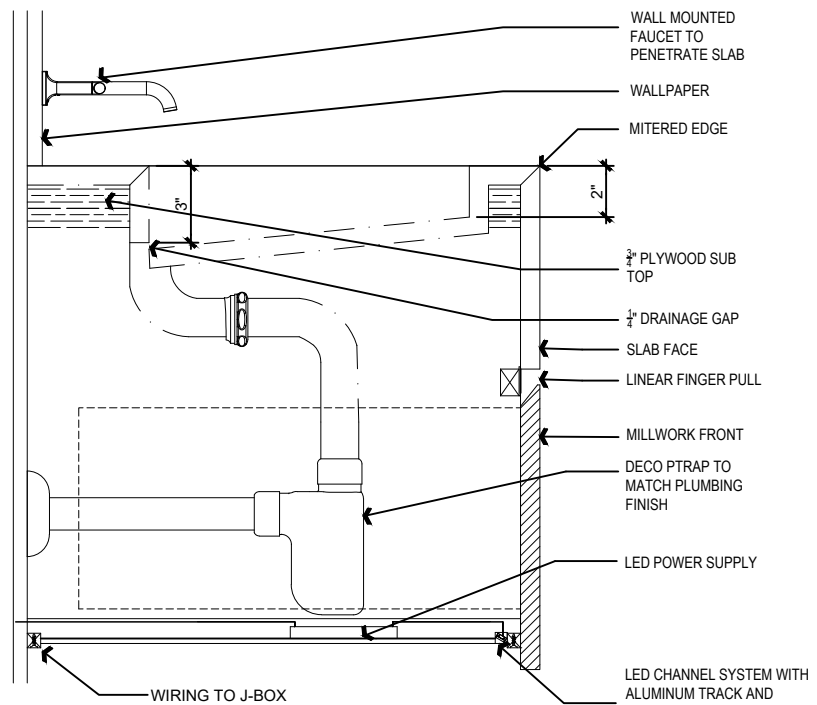

**INTEGRAL SLAB SINK**

ID.8




SCALE: NTS

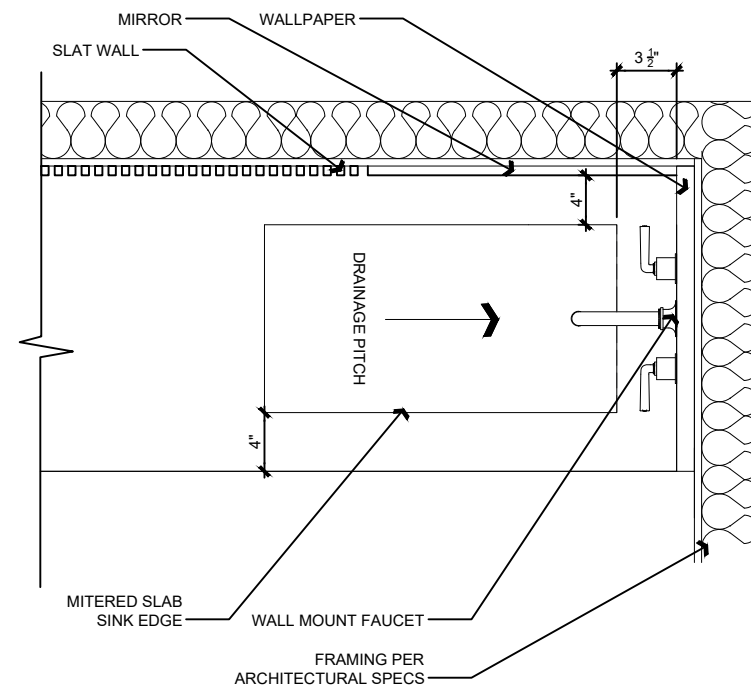




**INTEGRAL SLAB SINK (PLAN)**




ID.8




SCALE: NTS

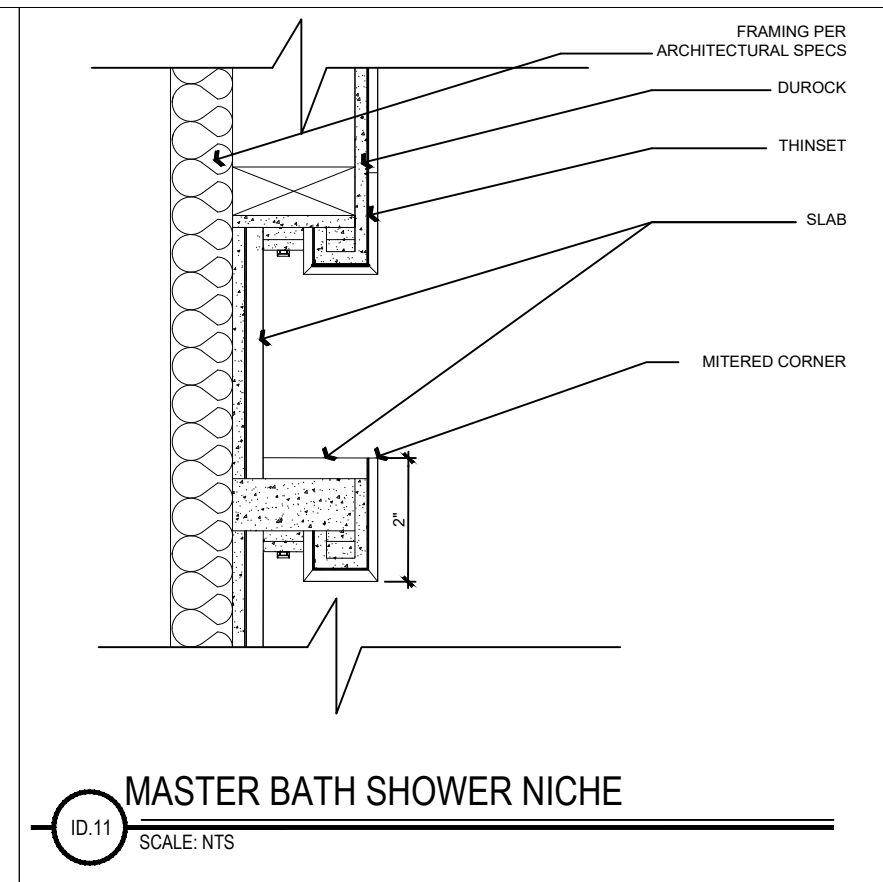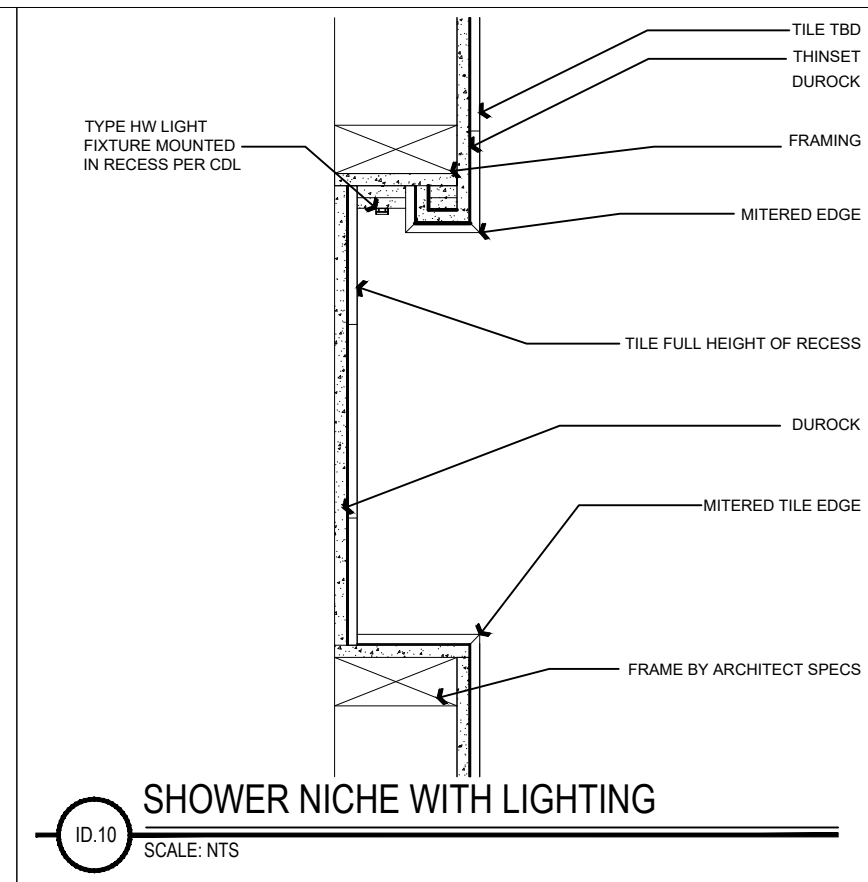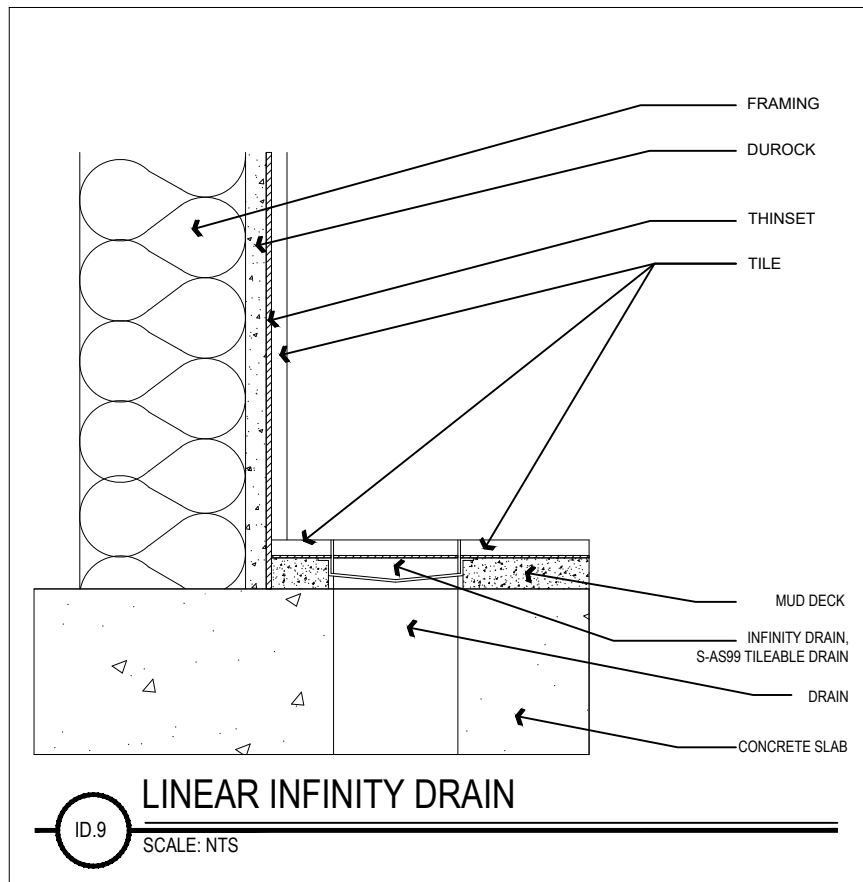




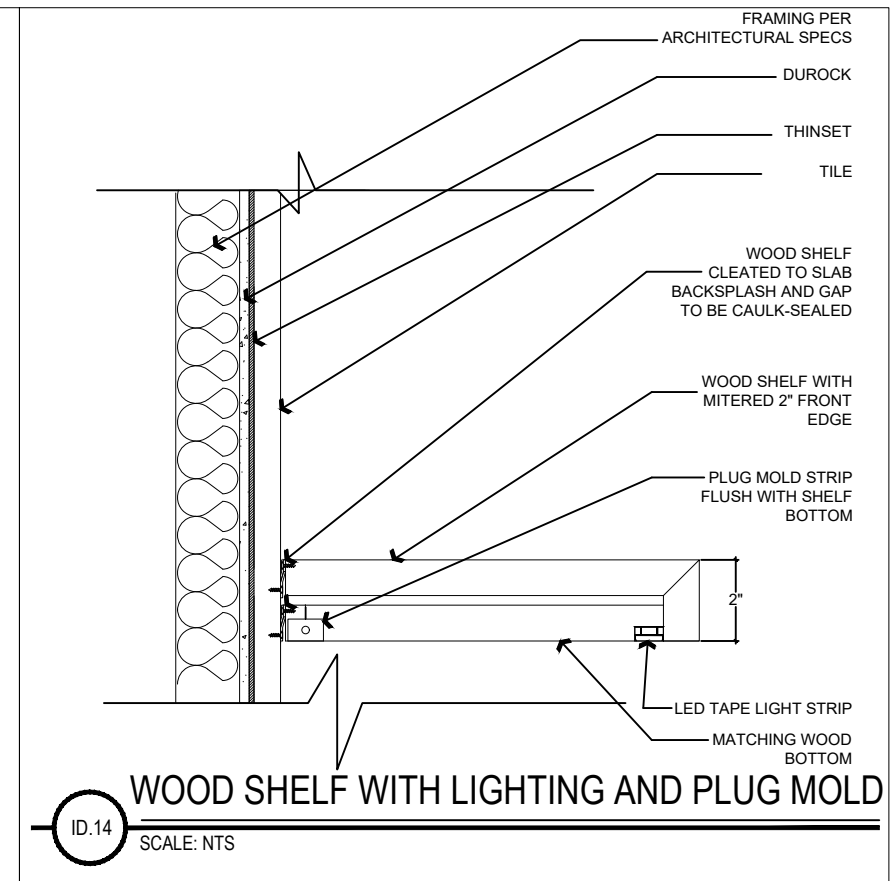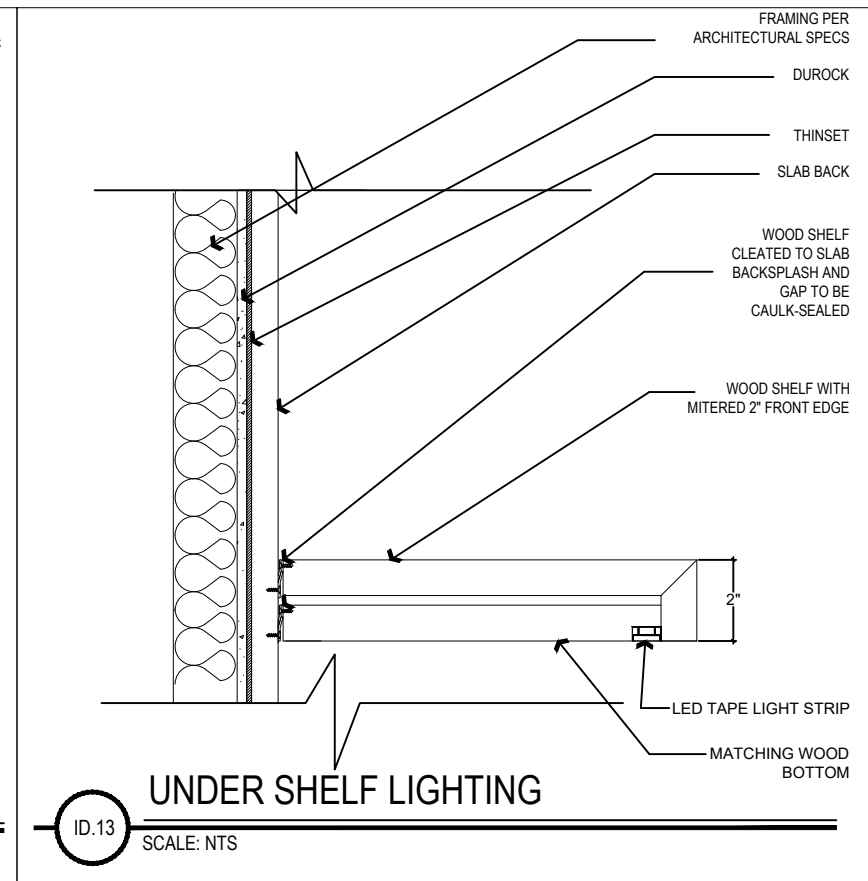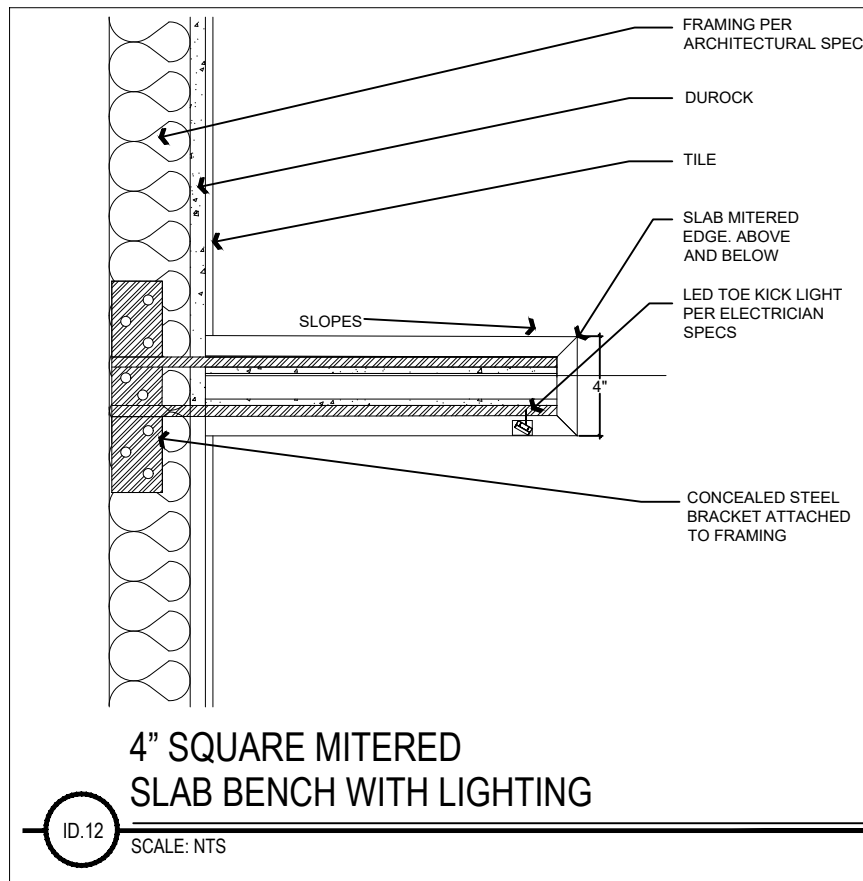

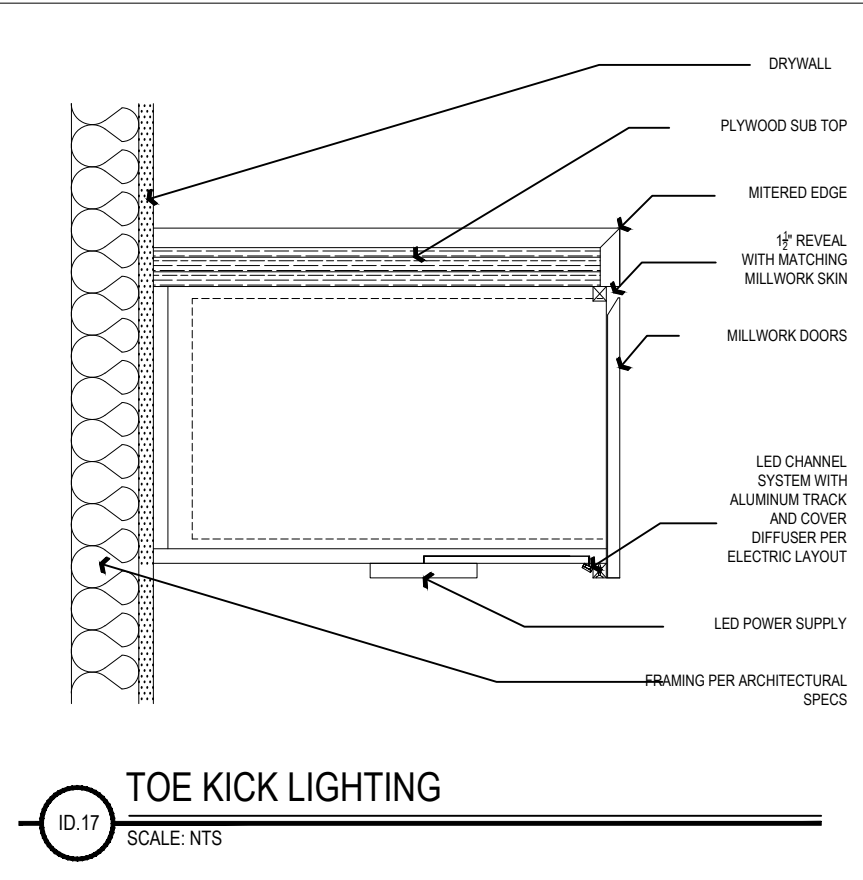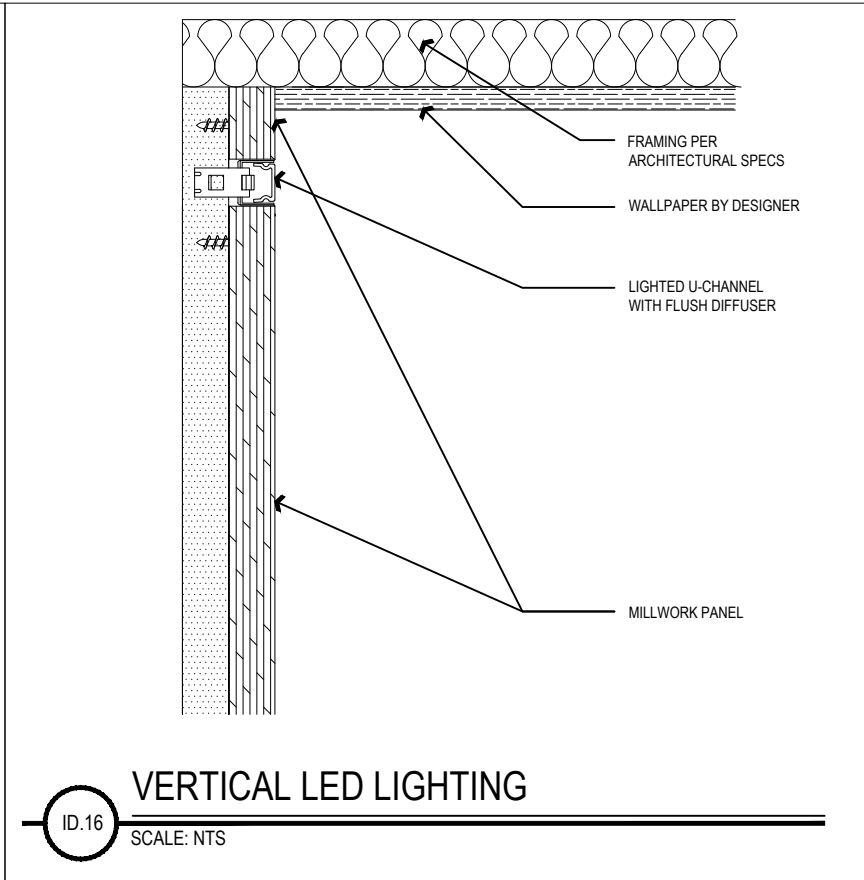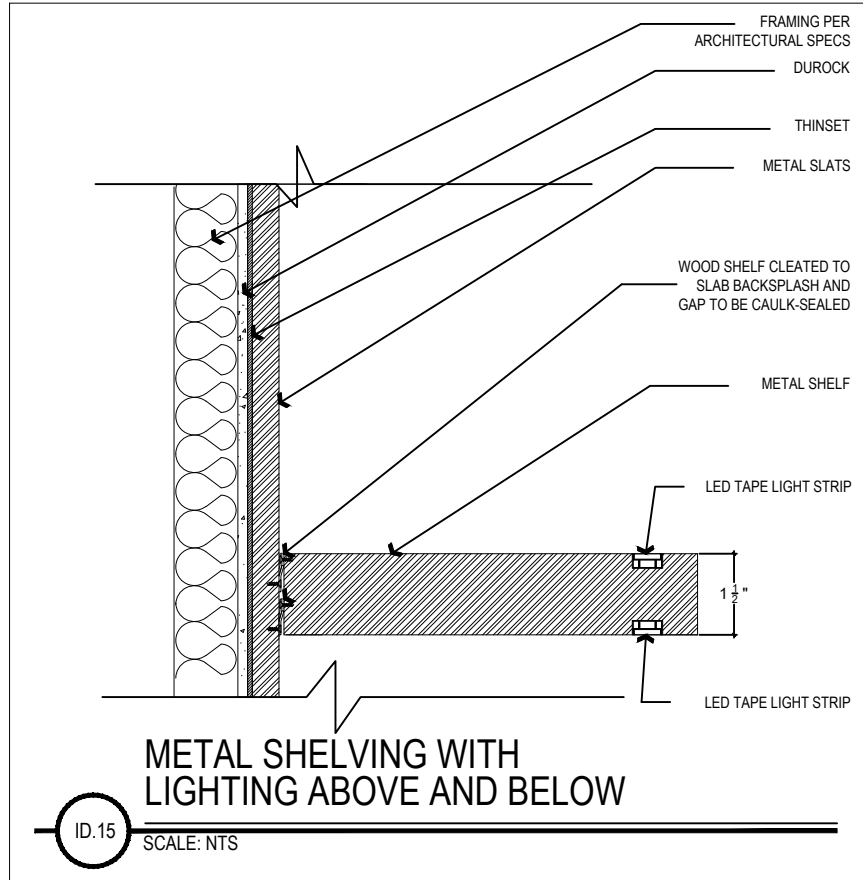

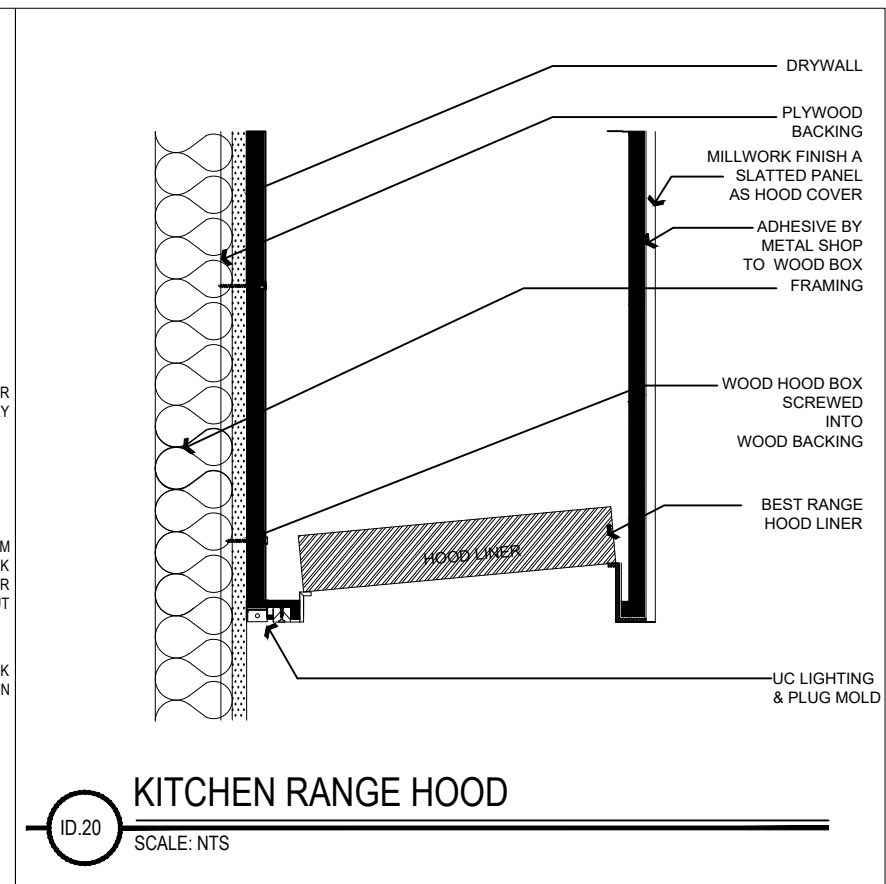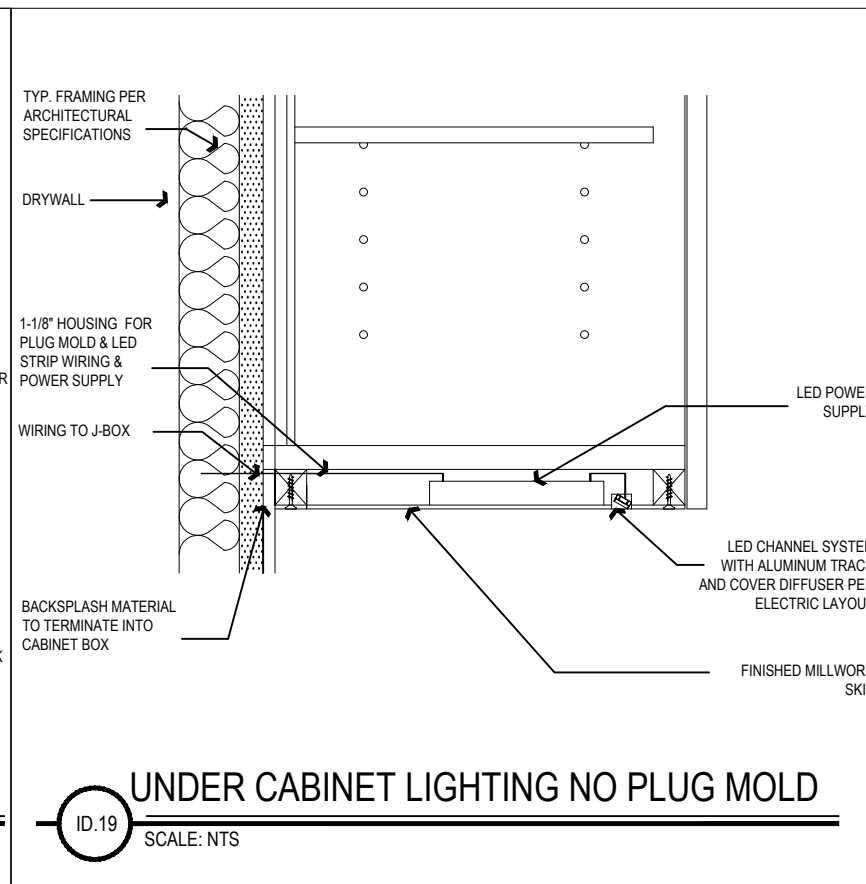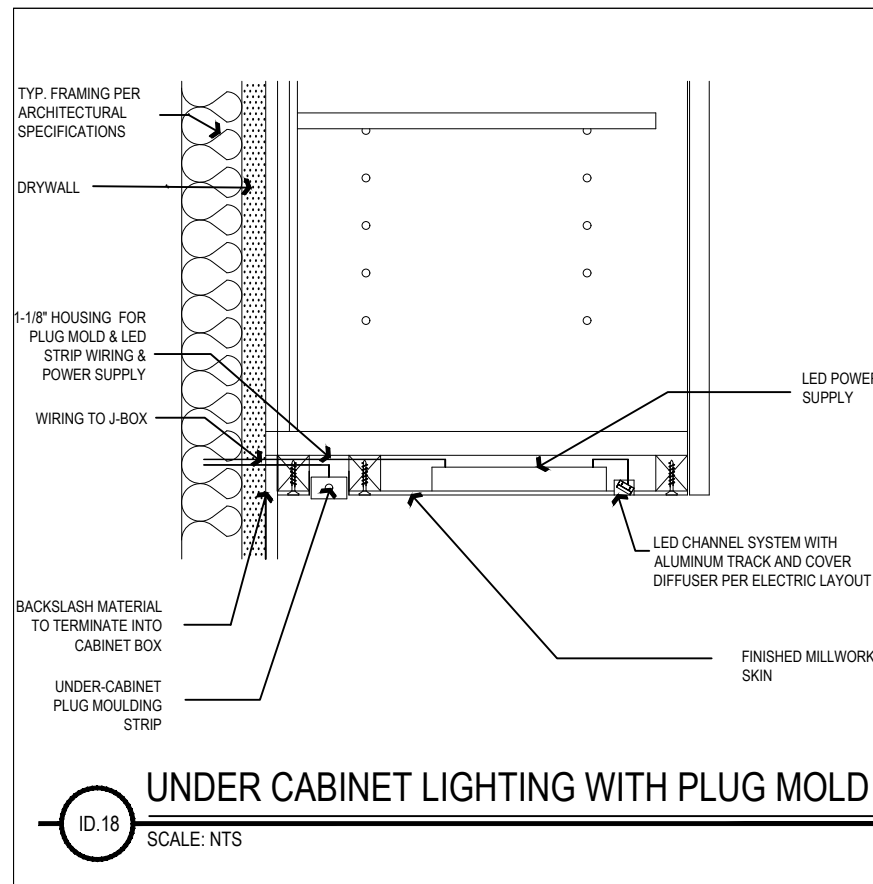

PLAN

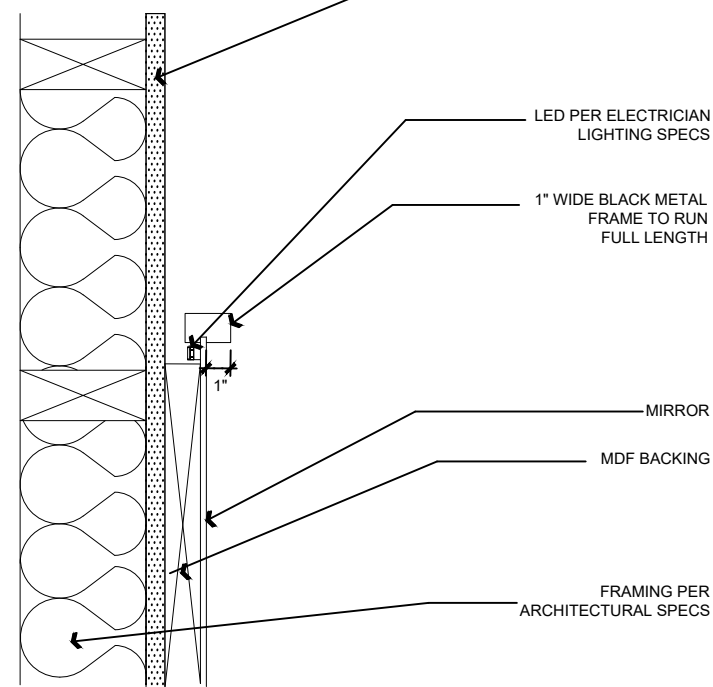


POWDER MIRROR

ID.21

SCALE: NTS

PLAN VIEW

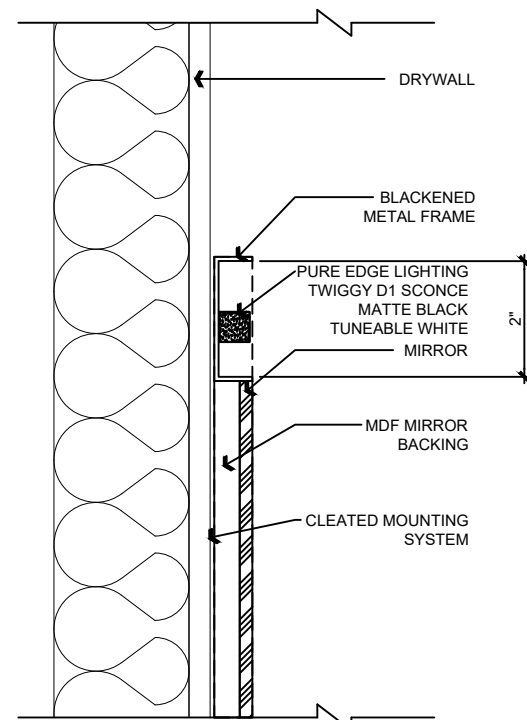


MIRROR FRAME FOR TWIGGY LIGHTS

ID.22

SCALE: NTS




FRAMING PER ARCHITECTURAL SPECS

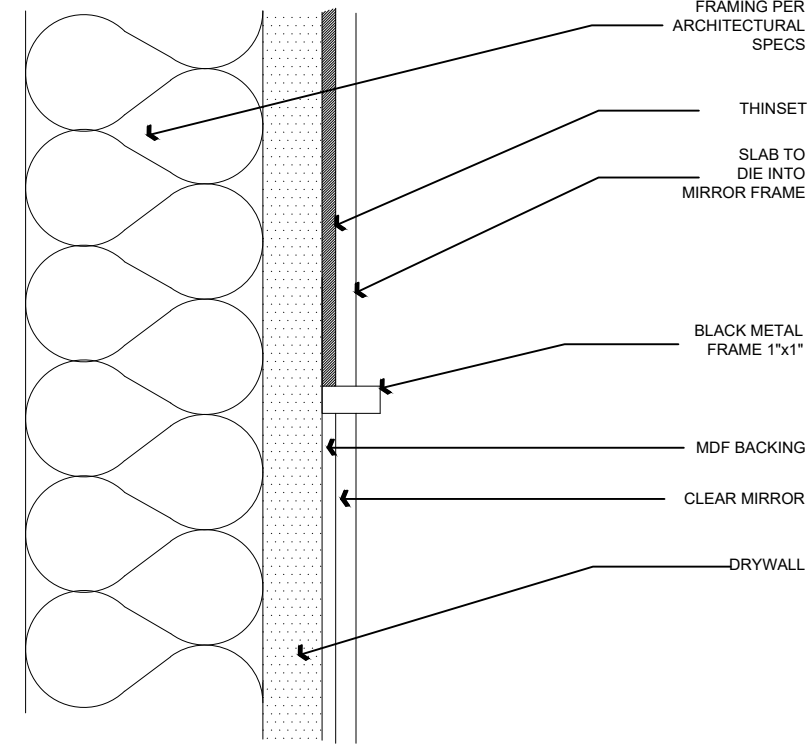


MASTER BATH MIRROR

ID.23

SCALE: NTS

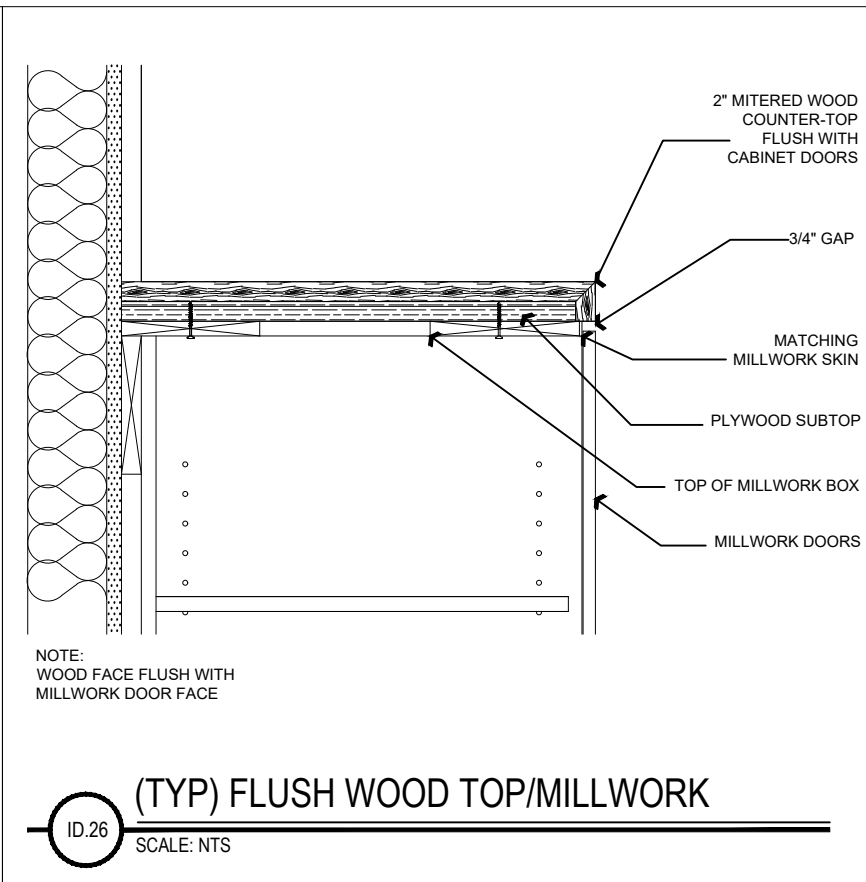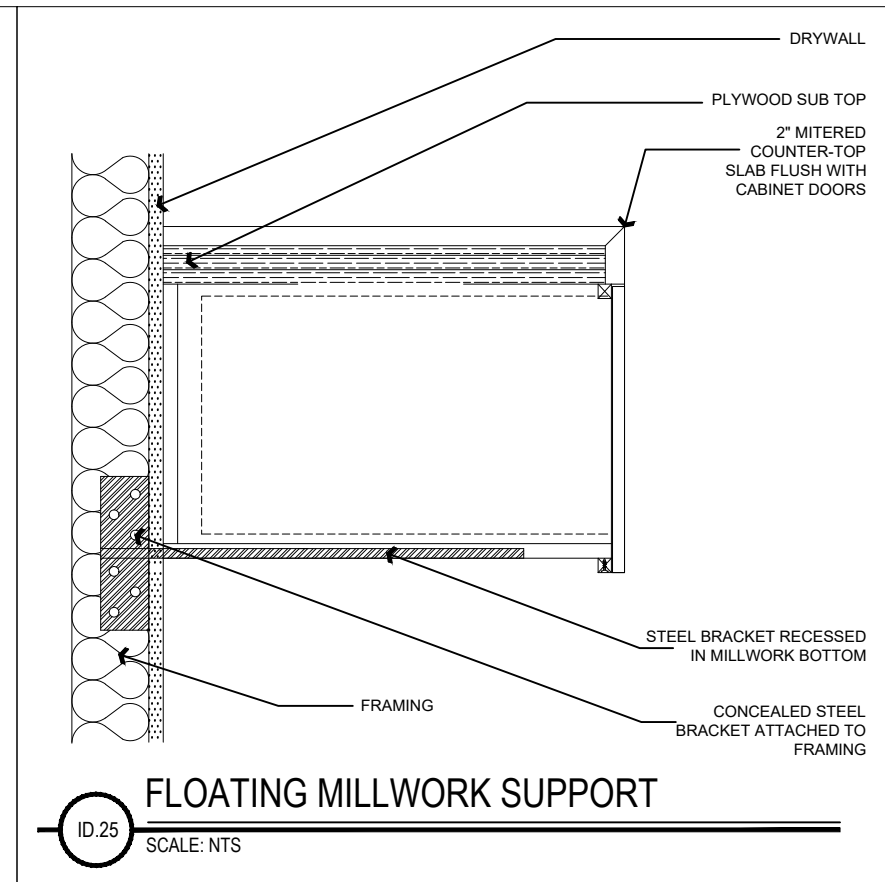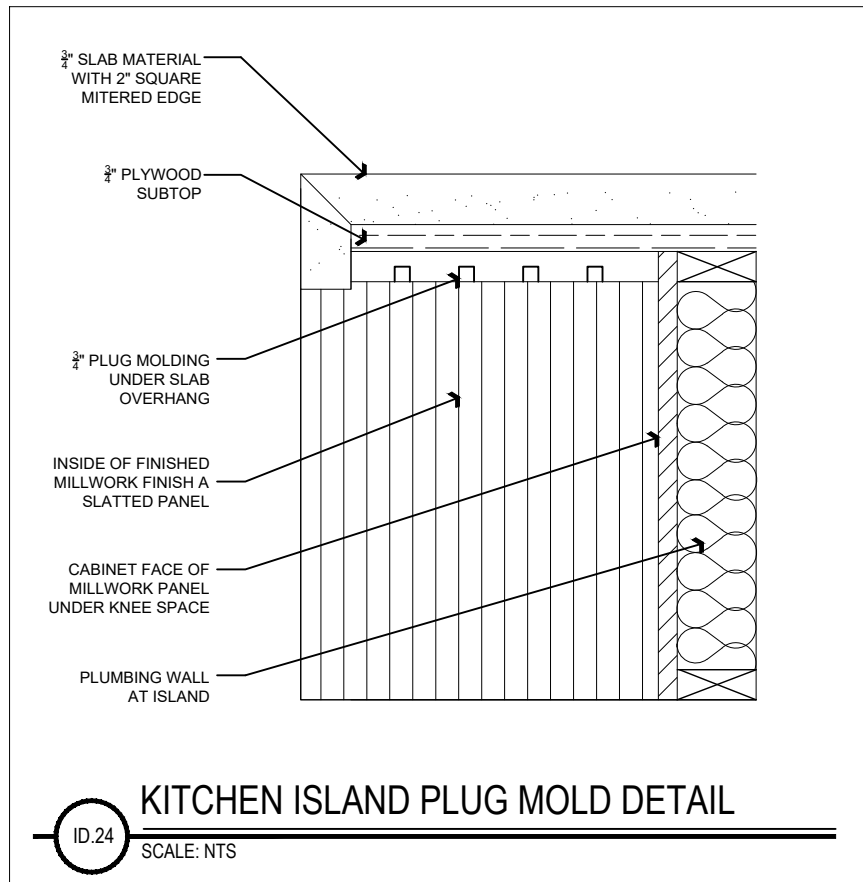




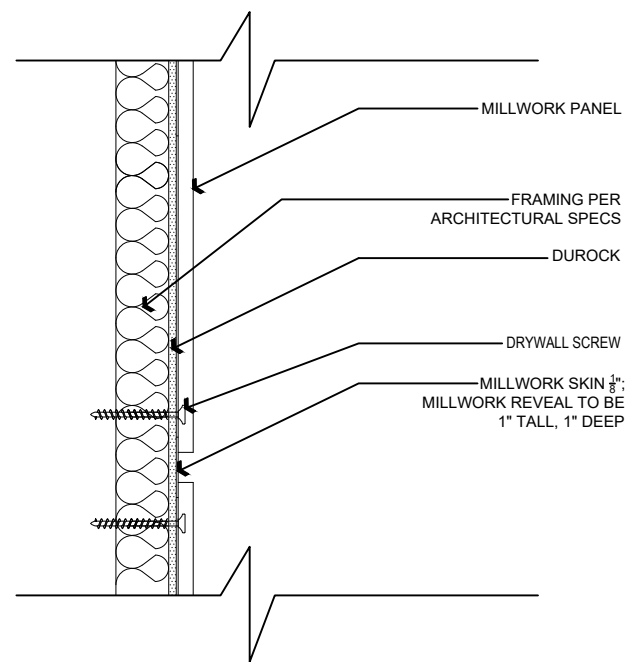

WOOD REVEALS IN KITCHEN

ID.27


SCALE: NTS

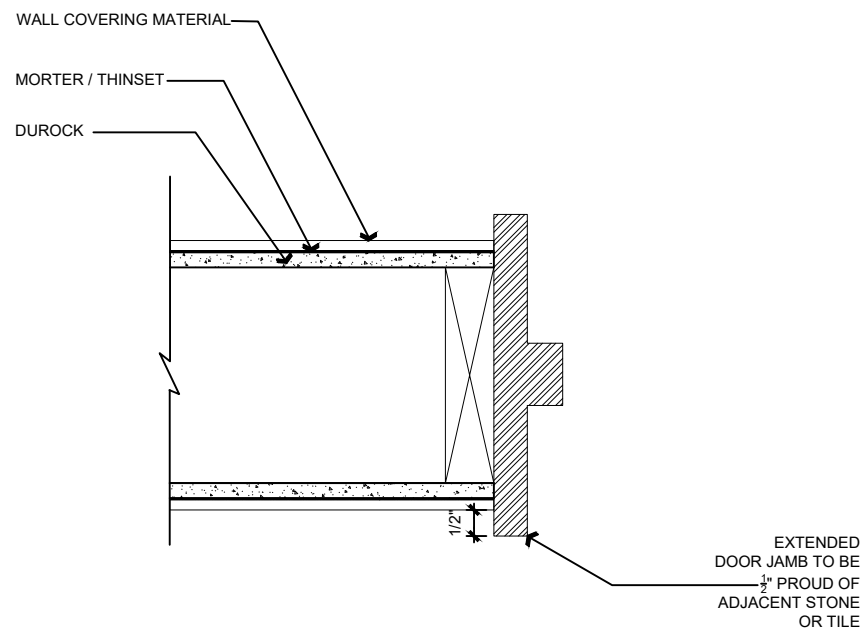

EXTENDED DOOR JAMB FOR TILE/STONE TERMINATION

ID.28


SCALE: NTS

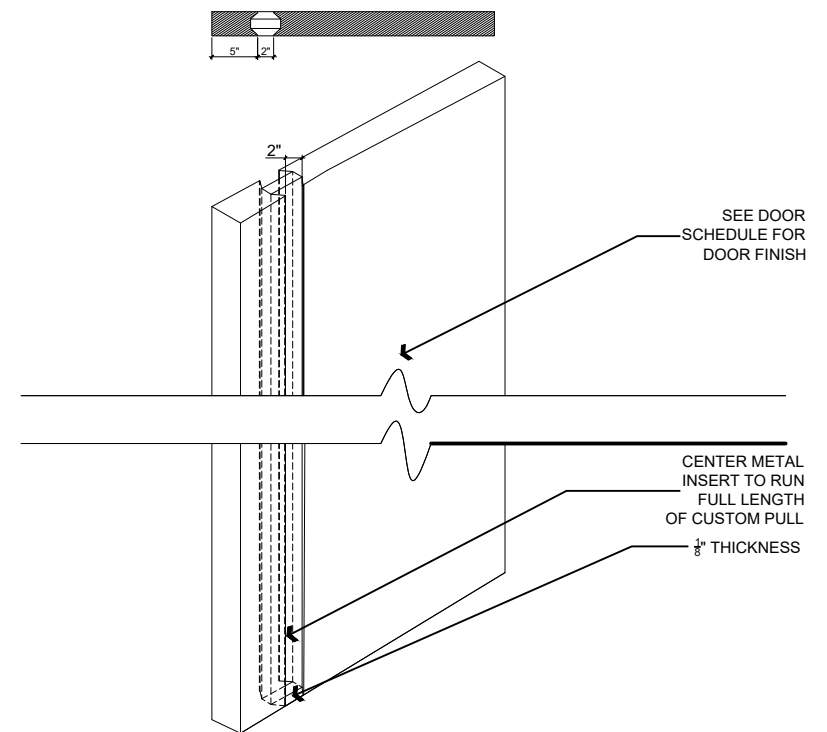

CUSTOM BARN DOOR HARDWARE

ID.29


SCALE: NTS

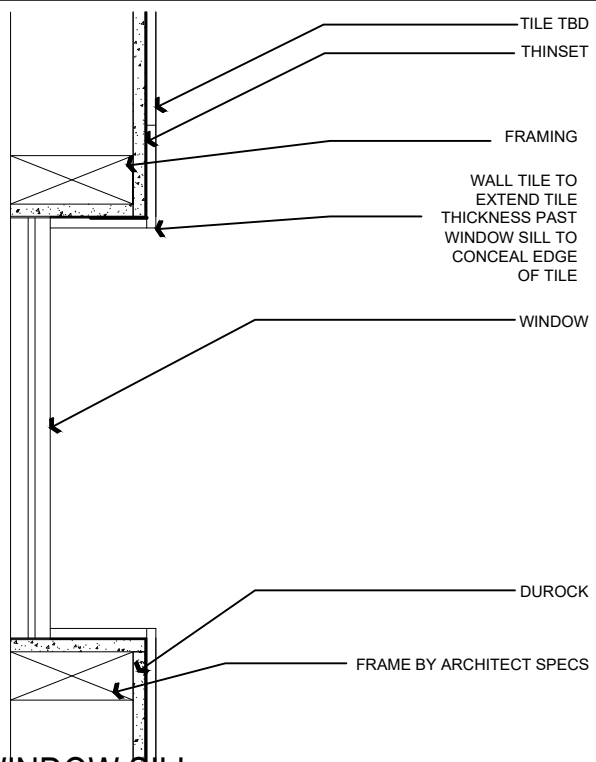

**TILED WINDOW SILL**

ID.30


SCALE: NTS

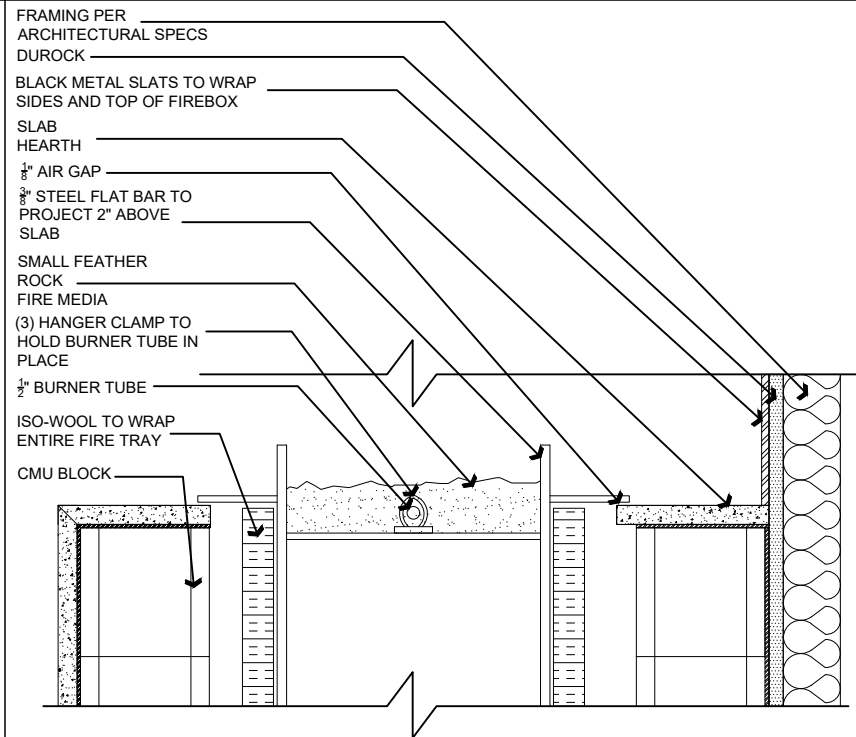

**HEAT RETARDANT FIRE TRAY**

ID.31


SCALE: NTS

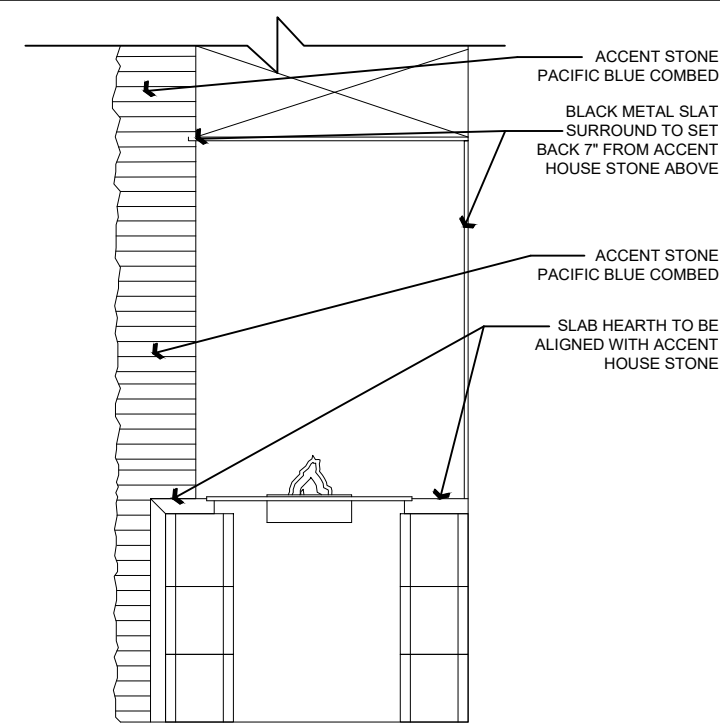

**METAL FIREPLACE SURROUND**

ID.32

SCALE: NTS

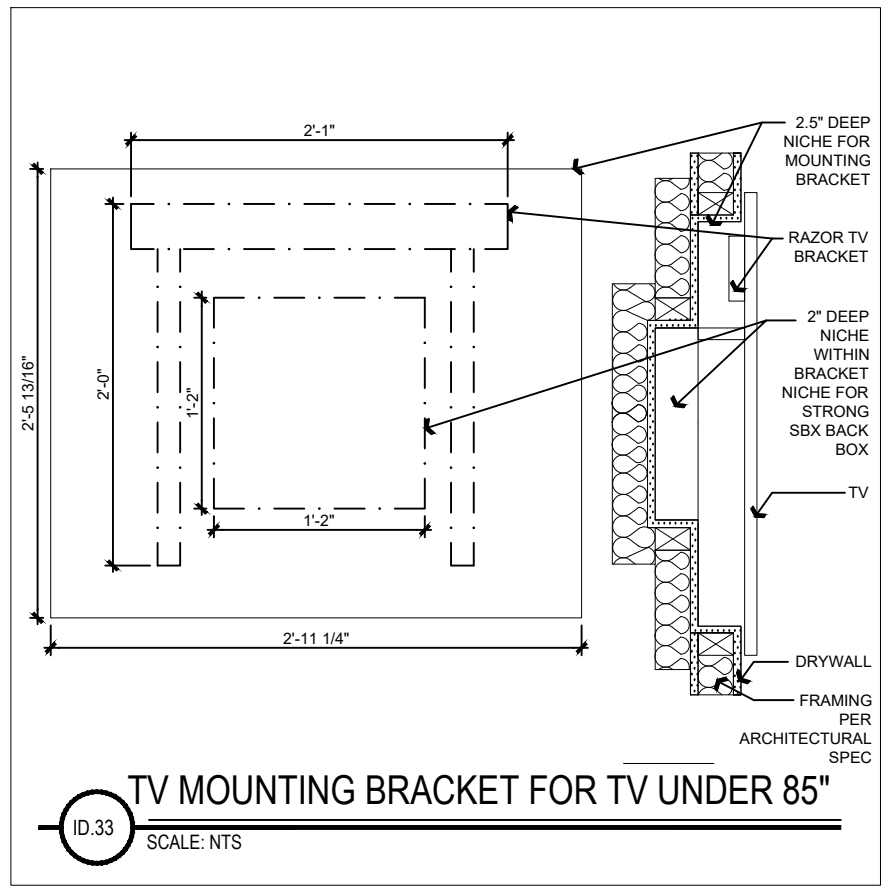

## SPECIFICATIONS

LOCATION	ITEM	MODEL #	MANUFACTURER	COLLECTION	FINISH	QTY	PRODUCT DETAILS	
A P P L I A N C E S	KITCHEN	REFRIGERATOR	DEC3650RID/R	SUB ZERO		PANEL READY STAINLESS STEEL	1	36" DESIGNER COLUMN REFRIGERATOR WITH INTERNAL DISPENSER - PANEL READY - RIGHT HINGE
	KITCHEN	FREEZER	DEC3650FI/L	SUB ZERO		PANEL READY STAINLESS STEEL	1	36" DESIGNER COLUMN FREEZER WITH ICE MAKER - PANEL READY - LEFT HINGE
	KITCHEN	MULTIFUNCTION MODULE	MM15TF/S	WOLF			2	15" TRANSITIONAL MULTIFUNCTION MODULE
	KITCHEN	GAS COOKTOP	CG152TF/S	WOLF			1	15" GAS TRANSITIONAL COOKTOP
	KITCHEN	INDUCTION COOKTOP	CI152TF/S	WOLF			1	15" TRANSITIONAL INDUCTION COOKTOP
	KITCHEN	COFFEE SYSTEM	EC3050CM/B	WOLF	M-SERIES	BLACK	1	30" M SERIES CONTEMPORARY COFFEE SYSTEM
	KITCHEN	HOOD LINER	CP571QT602SB	BEST RANGE HOODS			1	60-INCH BUILT-IN RANGE HOOD WITH IQ12 BLOWER, 1500 MAX BLOWER CFM
	KITCHEN	STEAM OVEN	CSO3050CM/B/T	WOLF	M-SERIES		1	30" M SERIES CONTEMPORARY CONVECTION STEAM OVEN
	KITCHEN	SPEED OVEN	SPO30CM/B/TH	WOLF	M-SERIES		1	30" M SERIES CONTEMPORARY SPEED OVEN
	KITCHEN	BUILT IN OVEN	SO30CM/B	WOLF	M-SERIES		2	30" M SERIES CONTEMPORARY BUILT-IN SINGLE OVEN
	KITCHEN	DISHWASHER	DW2450S	COVE		PANEL READY STAINLESS STEEL	1	24" DISHWASHER WITH WATER SOFTENER - PANEL READY
	BAR	ICE MACHINE	UC-15IP	COVE		PANEL READY STAINLESS STEEL	1	15" ICE MAKER WITH PUMP - PANEL READY
	BAR	WINE STORAGE	DET3050WR/L	SUB ZERO		PANEL READY STAINLESS STEEL	1	30" DESIGNER WINE STORAGE WITH REFRIGERATOR DRAWERS - PANEL READY
	BAR	DISHWASHER	DW2450S	COVE		PANEL READY STAINLESS STEEL	1	24" DISHWASHER WITH WATER SOFTENER - PANEL READY
THEATER	REFRIGERATOR/FREEZER DRAWERS	ID-36CI	SUB ZERO		PANEL READY STAINLESS STEEL	1	36" DESIGNER REFRIGERATOR/FREEZER DRAWERS WITH ICE - PANEL READY	
A P P L I A N C E S	VIEW LOFT	COFFEE SYSTEM	EC3050CM/B	WOLF	M-SERIES	BLACK	1	30" M SERIES CONTEMPORARY COFFEE SYSTEM
	VIEW LOFT	DISHWASHER	DW2450S	COVE		PANEL READY STAINLESS STEEL	1	24" DISHWASHER WITH WATER SOFTENER - PANEL READY
	VIEW LOFT	SPEED OVEN	SPO30CM/B/TH	WOLF	M-SERIES		1	30" M SERIES CONTEMPORARY SPEED OVEN
	VIEW LOFT	REFRIGERATOR DRAWERS	ID-30R	SUB ZERO		PANEL READY STAINLESS STEEL	1	30" DESIGNER REFRIDGERATOR DRAWERS PANEL-READY
	CASITA	REFRIGERATOR/FREEZER DRAWERS	ID-30CI	SUB ZERO		PANEL READY STAINLESS STEEL	1	30" DESIGNER REFRIGERATOR/FREEZER DRAWERS WITH ICE - PANEL-READY
	CASITA	MICROWAVE DRAWER	MD24TE/S	WOLF			1	24" TRANSITIONAL MICROWAVE DRAWER
	LAUNDRY	GAS DRYER	ELFG7637AT	ELECTROLUX		TITANIUM	2	FRONT LOAD PERFECT STEAM™ GAS DRYER WITH LUXCARE® DRY AND INSTANT REFRESH - 8.0 CU. FT.
	LAUNDRY	WASHER	ELFW7637AT	ELECTROLUX		TITANIUM	2	FRONT LOAD PERFECT STEAM™ WASHER WITH LUXCARE® PLUS WASH AND SMARTBOOST® - 4.5 CU. FT.
	LAUNDRY	STACKING KIT					2	STACKING KIT
	BBQ	ACCESS DOORS	827602	WOLF		STAINLESS STEEL	1	42" DOUBLE ACCESS DOORS
	BBQ	GAS GRILL	OG42	WOLF			1	42" OUTDOOR GAS GRILL - NATURAL GAS
	BBQ	TRASH DOOR	827370	WOLF		STAINLESS STEEL	1	DOUBLE TRASH/RECYCLING DRAWER
	BBQ	HOOD LINER	PL521912	WOLF			1	52" PRO HOOD LINER 19" DEPTH

	LOCATION	ITEM	MODEL #	MANUFACTURER	COLLECTION	FINISH	PRODUCT DETAILS	
D O O R S & H A R D W A R E	ENTRY	FRONT DOOR				MATTE BLACK	CUSTOM PIVOT DOOR; PER ARCHITECT SPECIFICATIONS	
	ENTRY	FRONT DOOR PULL	AP431-G-104"622	TRIMCO		MATTE BLACK	CUSTOM FULL-LENGTH BAR-PULL; PER ARCHITECT SPECIFICATIONS	
	THROUGHOUT	INTERIOR DOORS				BLACK STAINED RIFT OAK	BLACK STAINED RIFT OAK SLAB WOOD DOORS WITH EXTENDED FLY-BY JAMBS; FIXED PANEL ABOVE 8' HINGED DOORS TO EXTEND TO LID; FIXED PANEL TO MATCH FINISH OF DOOR PANEL BELOW	
	THROUGHOUT	INTERIOR SWINGING DOORS HARDWARE		EMTEK	DUMONT	FLAT BLACK, US19	DUMONT LEVER WITH STRETTO ROSETTE (2" X 10"); SEE S-3	
	THROUGHOUT	BARN DOOR				BLACK STAINED RIFT OAK	BARN DOOR BLACK STAINED RIFT OAK FLAT SLAB-STYLE, SEE S-3; ROLLING WALL CONCEPT	
	THROUGHOUT	BARN DOOR HARDWARE		CUSTOM		BLACK STAINED RIFT OAK	ROUTED FINGER PULL WITH MATTE BLACK METAL BACK	
	THROUGHOUT	DOOR STOPS		EMTEK		FLAT BACK US19	EMTEK CYLINDER FLOOR BUMPER, 2" TALL	
	THROUGHOUT (SEE ELEVATION CALLOUTS)	APPLIANCES DECORATIVE HARDWARE PULLS	SYMA32	RINCOMATIC		MATTE BLACK	RINCOMATIC, SYMA 32, MATTE BLACK 52M	
THROUGHOUT (SEE ELEVATION CALLOUTS)	LINEAR FINGER PULLS					LINEAR FINGER PULL (SEE ID.6)		
	SHOWER ENCLOSURES THROUGHOUT	PULL HANDLES	KT3061-800-4010-03	KEYTIGER	MADISON	MATTE BLACK	MADISON TWO-SIDED 31.5" OVERALL LENGTH	
	LOCATION	ITEM	MODEL #	MANUFACTURER		FINISH	SIZE	PRODUCT DETAILS
F I R E P L A C E S	GREAT ROOM	FIREBOX TRAY				MATTE BLACK	APPROX 8' WIDE x 8" DEEP	5' LONG METAL FIRE BOX TRAY TO BE RECESSED IN SLAB WITH 1/2" PROJECTION ABOVE HEARTH
	GREAT ROOM	FIREPLACE MEDIA						SMALL FEATHER ROCK
	LOCATION	ITEM	MODEL #	MANUFACTURER	COLLECTION	FINISH	SIZE	PRODUCT DETAILS
F L O O R I N G	THROUGHOUT (INTERIOR AND EXTERIOR PATIO SPACES)	PORCELAIN TILE		FACINGS OF AMERICA	ERGON - ELEGANCE PRO	GREY NATURALE	24" X 48"	FACINGS OF AMERICA PORCELAIN TILE; ELEGANCE PRO - GREY NATURALE
	THROUGHOUT (SHOWERS AND EXTERIOR)	PORCELAIN TILE		FACINGS OF AMERICA	ERGON - ELEGANCE PRO	GREY NATURALE	24" X 48"	FACINGS OF AMERICA PORCELAIN TILE; ELEGANCE PRO - GREY NATURALE
	BEDROOMS, CLOSETS, OFFICE, CASITA AND VIEWING LOFT	WOOD FLOORING		PROVENZA	LUGANO COLLECTION	ORO	8" WIDE	
	THEATER	CARPET	104-104	FLOOR STYLES	CLAIRE	ELIPSE	TBD	TBD
	EXERCISE	VINYL ROLLED FLOORS	TBD	MARINE CARPETING	TBD	5 GREYSTONE	TBD	INFINITY WOVEN VINYL FLOORING - VINYL DECKING - CC BACKING - GREYSTONE
	GARAGE	EPOXY	TBD	TBD	TBD	TBD	TBD	GREY WITH BLACK AND WHITE SPEC





	LOCATION	ITEM	MANUFACTURER	COLLECTION	FINISH	QUANTITY	SIZE	PRODUCT DETAILS
G L A S S	POWDER	VANITY MIRROR			CLEAR MIRROR, MATTE BLACK METAL FRAME	1	SEE INT. ELEVS.	CUSTOM FULL LENGTH MIRROR WITH 1" SQUARE MATTE BLACK METAL FRAME AND BACKLIGHTING
	BATH 1	VANITY MIRROR	IBM	PARIS MIRROR	CLEAR MIRROR, FRAMELESS MIRROR	1	SEE INT. ELEVS.	DIMMABLE BACKLIT MIRROR ORIGINAL 48 X 35
	W.I.C 1	WALL MIRROR	RH		RAW STEEL FRAME, CLEAR MIRROR	1	SEE INT. ELEVS.	METAL FLOATING LEANER MIRROR 23" X 79"
	BATH 2	VANITY MIRROR	IBM	PARIS MIRROR	CLEAR MIRROR, FRAMELESS MIRROR	1	SEE INT. ELEVS.	DIMMABLE BACKLIT MIRROR ORIGINAL 48 X 35
	W.I.C 2	WALL MIRROR	CB2		MATTE BLACK METAL FRAME, CLEAR MIRROR	1	SEE INT. ELEVS.	INFINITY BLACK FLOOR LENGTH MIRROR 32"X76"
	BATH 3	VANITY MIRROR	IBM	PARIS MIRROR	CLEAR MIRROR, FRAMELESS MIRROR	1	SEE INT. ELEVS.	DIMMABLE BACKLIT MIRROR ORIGINAL 36 X 36
G L A S S	W.I.C 3	WALL MIRROR	CB2		MATTE BLACK METAL FRAME, CLEAR MIRROR	1	SEE INT. ELEVS.	INFINITY BLACK FLOOR LENGTH MIRROR 32"X76"
	CASITA BATH	VANITY MIRROR	IBM	PARIS MIRROR	CLEAR MIRROR, FRAMELESS MIRROR	1	SEE INT. ELEVS.	DIMMABLE BACKLIT MIRROR ORIGINAL 24 X 36
	PRIMARY BATH	VANITY MIRROR			MATTE BLACK METAL FRAME, CLEAR MIRROR	2	SEE INT. ELEVS.	CLEAR MIRROR W/ POLISHED EDGES; ON 1" THICK BLACK METAL FRAME
	PRIMARY BATH	MAKE UP VANITY MIRROR			MATTE BLACK METAL FRAME, CLEAR MIRROR	1	SEE INT. ELEVS.	CLEAR MIRROR WITH TWIGGY LIGHTS TO ACT AS MIRROR FRAME
	MASTER W.I.C	3-WAY MIRRORED DOORS			CLEAR MIRROR		SEE INT. ELEVS.	FULL HEIGHT MIRROR OPEN TO CREATE 3-WAY MIRROR
	SHOWER DOORS THROUGHOUT	SHOWER ENTRY GLASS DOOR			STARPHIRE GLASS			
G L A S S	SHOWER ENCLOSURES THROUGHOUT	FIXED PANELS			STARPHIRE GLASS			FIXED RECESSED GLASS PANELS WITH INSET U-CHANNEL
	SHOWER ENCLOSURES THROUGHOUT	RECESSED U-CHANNEL	USHORIZON					METAL U-CHANNEL FOR RECESSED 1/2" FIXED GLASS PANELS
	SHOWER ENCLOSURES THROUGHOUT	GLASS DOOR HANDLE	KEYTIGER	MADISON	MATTE BLACK			MADISON TWO-SIDED 31.5" OVERALL LENGTH
	SHOWER DOORS; THROUGHOUT BATHS	WALL MOUNT GLASS DOOR HINGES	US HORIZON	DESIGNER SERIES	MATTE BLACK			WALL MOUNT W/ SHORT BACK PLATE
	SHOWER DOORS; MASTER BATH	PIVOT MOUNT GLASS DOOR HINGES	CR LAWRENCE	SENIOR CARDIFF SERIES	MATTE BLACK			GLASS DOOR PIVOT HINGES
L I G H T I N G	LOCATION	ITEM	MODEL #	MANUFACTURER	COLLECTION	FINISH	QUANTITY	PRODUCT DETAILS
	POWDER	PENDANT					3	TBD
	MASTER BATH	PENDANT					3	TBD

	LOCATION	ITEM	MANUFACTURER	COLLECTION	FINISH	PRODUCT DETAILS
MILLWORK	KITCHEN	HOOD COVER			MILLWORK FINISH A: RIFT-CUT WHITE OAK WITH LIGHT STAIN	MILLWORK FINISH A: RIFT-CUT WHITE OAK WITH LIGHT STAIN PER DESIGNER APPROVED SAMPLE; SLATTED PANEL; UNDER CABINET LIGHTING WITH PLUG MOLD(SEE ID.18); 3/4" SHADOW LINE (SEE ID.2)
	KITCHEN	COOKTOP	MIRLUX	SUPER MATTE	MILLWORK FINISH B: MIRLUX TAN SUPER MATTE	MILLWORK FINISH B: MIRLUX TAN SUPER MATTE PER DESIGNER-APPROVED SAMPLE; UTENSILS/SPICES DRAWER; INTEGRAL RINCOMATIC PULL MATTE BLACK (SEE ID.4); 24" DEEP; RECESSED TOE KICK
	KITCHEN	APPLIANCE GARAGE	MIRLUX	SUPER MATTE	MILLWORK FINISH B: MIRLUX TAN SUPER MATTE	MILLWORK FINISH B: MIRLUX TAN SUPER MATTE PER DESIGNER-APPROVED SAMPLE; APPLIANCE GARAGE W/ POCKETING DOOR; INTEGRAL RINCOMATIC PULL MATTE BLACK (SEE ID.4); 24" DEEP; RECESSED TOE KICK
	KITCHEN	SHELVES (INSIDE APPLIANCE GARAGE)			MILLWORK FINISH A: RIFT-CUT WHITE OAK WITH LIGHT STAIN	MILLWORK FINISH A: RIFT-CUT WHITE OAK WITH LIGHT STAIN PER DESIGNER-APPROVED SAMPLE; 2" THICK SHELVES WITH UNDER SHELF LIGHTING (SEE ID.13)
	KITCHEN	PERIMETER TALLS	MIRLUX	SUPER MATTE	MILLWORK FINISH B: MIRLUX TAN SUPER MATTE	MILLWORK FINISH B: MIRLUX TAN SUPER MATTE PER DESIGNER-APPROVED SAMPLE; INTEGRAL RINCOMATIC PULL MATTE BLACK (SEE ID.4); 24" DEEP; RECESSED TOE KICK; FIXED PANELS ABOVE; 3/4" SHADOW LINE (SEE ID.2)
	KITCHEN	CONCEALED PANTRY DOOR	MIRLUX	SUPER MATTE	MILLWORK FINISH B: MIRLUX TAN SUPER MATTE	MILLWORK FINISH B: MIRLUX TAN SUPER MATTE PER DESIGNER-APPROVED SAMPLE; INTEGRAL RINCOMATIC PULL MATTE BLACK (SEE ID.4); RECESSED TOE KICK; FIXED PANELS ABOVE; 3/4" SHADOW LINE (SEE ID.2)
	KITCHEN	REFRIGERATOR AND FREEZER PANEL	MIRLUX	SUPER MATTE	MILLWORK FINISH B: MIRLUX TAN SUPER MATTE	MILLWORK FINISH B: MIRLUX TAN SUPER MATTE PER DESIGNER-APPROVED SAMPLE; INTEGRAL RINCOMATIC PULL MATTE BLACK (SEE ID.4); RECESSED TOE KICK; FIXED PANELS ABOVE; REFRIGERATOR AND FREEZER BEHIND
	KITCHEN	MILLWORK WRAP	MIRLUX	SUPER MATTE	MILLWORK FINISH B: MIRLUX TAN SUPER MATTE	MILLWORK FINISH B: MIRLUX TAN SUPER MATTE PER DESIGNER-APPROVED SAMPLE; REVEALS WRAP AROUND WALL AND MATCH FINGER PULL HEIGHT
	KITCHEN	ISLAND (LOWER CABINETS)	MIRLUX	SUPER MATTE	MILLWORK FINISH B: MIRLUX TAN SUPER MATTE	MILLWORK FINISH B: MIRLUX TAN SUPER MATTE PER DESIGNER-APPROVED SAMPLE; INTEGRAL RINCOMATIC PULL MATTE BLACK (SEE ID.4); 24" DEEP; RECESSED TOE KICK; DRAWER IN DRAWER; ROLL OUT UNDERNEATH SINK
	KITCHEN	ISLAND (KNEE SPACE)	MIRLUX	SUPER MATTE	MILLWORK FINISH B: MIRLUX TAN SUPER MATTE	MILLWORK FINISH B: MIRLUX TAN SUPER MATTE PER DESIGNER-APPROVED SAMPLE; INTEGRAL RINCOMATIC PULL MATTE BLACK (SEE ID.4); 24" DEEP; RECESSED TOE KICK; RECESSED 20" FOR KNEE SPACE
MILLWORK	KITCHEN	ISLAND (SLAT PANEL SIDES)	MIRLUX	SUPER MATTE	MILLWORK FINISH B: MIRLUX TAN SUPER MATTE	MILLWORK FINISH B: MIRLUX TAN SUPER MATTE PER DESIGNER-APPROVED SAMPLE; INTEGRAL RINCOMATIC PULL MATTE BLACK (SEE ID.4); 24" DEEP; RECESSED TOE KICK
	PANTRY	LOWER CABINETS	MIRLUX	SUPER MATTE	MILLWORK FINISH B: MIRLUX TAN SUPER MATTE	MILLWORK FINISH B: MIRLUX TAN SUPER MATTE PER DESIGNER-APPROVED SAMPLE; INTEGRAL RINCOMATIC PULL MATTE BLACK (SEE ID.4); 24" DEEP; RECESSED TOE KICK
	PANTRY	SHELVES			MILLWORK FINISH A: RIFT-CUT WHITE OAK WITH LIGHT STAIN	MILLWORK FINISH A: RIFT-CUT WHITE OAK WITH LIGHT STAIN PER DESIGNER APPROVED SAMPLE; 2" THICK SHELVES WITH LIGHTING AND PLUG MOLD (SEE ID.14)
	KEY DROP	CABINET	MIRLUX	SUPER MATTE	MILLWORK FINISH B: MIRLUX TAN SUPER MATTE	MILLWORK FINISH B: MIRLUX TAN SUPER MATTE PER DESIGNER-APPROVED SAMPLE; INTEGRAL RINCOMATIC PULL MATTE BLACK (SEE ID.4); TOE KICK LIGHT (SEE ID.17); PLUG INSIDE DRAWER
	BAR	LOWER CABINETS	MIRLUX	SUPER MATTE	MILLWORK FINISH B: MIRLUX TAN SUPER MATTE	MILLWORK FINISH B: MIRLUX TAN SUPER MATTE PER DESIGNER-APPROVED SAMPLE; INTEGRAL RINCOMATIC PULL MATTE BLACK (SEE ID.4); RECESSED TOE KICK; BOTTLE ROLL OUT
	BAR	UPPER CABINETS			MILLWORK FINISH A: RIFT-CUT WHITE OAK WITH LIGHT STAIN	MILLWORK FINISH A: RIFT-CUT WHITE OAK WITH LIGHT STAIN PER DESIGNER APPROVED SAMPLE; UC LIGHTING WITH PLUG MOLD (SEE ID.18); 3/4" SHADOW LINE (SEE ID.2); 16" DEEP
	BAR	WINE STORAGE PANEL			MILLWORK FINISH A: RIFT-CUT WHITE OAK WITH LIGHT STAIN	MILLWORK FINISH A: RIFT-CUT WHITE OAK WITH LIGHT STAIN PER DESIGNER APPROVED SAMPLE; INTEGRAL RINCOMATIC PULL MATTE BLACK (SEE ID.4); 3/4" SHADOW LINE (SEE ID.2); RECESSED TOE KICK
	GREAT ROOM	PIVOTING MILLWORK PANELS			MILLWORK FINISH A: RIFT-CUT WHITE OAK WITH LIGHT STAIN	MILLWORK FINISH A: RIFT-CUT WHITE OAK WITH LIGHT STAIN PER DESIGNER APPROVED SAMPLE; PIVOTING MILLWORK PANELS TO ACT AS ROOM DIVIDER; PIVOT MECHANISM AT LID AND FLOOR



MILLWORK	BONUS ROOM	MILLWORK DESK	MIRLUX	SUPER MATTE	MILLWORK FINISH B: MIRLUX TAN SUPER MATTE	MILLWORK FINISH B: MIRLUX TAN SUPER MATTE PER DESIGNER-APPROVED SAMPLE; 2 1/2" FLOATING MILLWORK DESK
	BONUS ROOM	CABINETS	MIRLUX	SUPER MATTE	MILLWORK FINISH B: MIRLUX TAN SUPER MATTE	MILLWORK FINISH B: MIRLUX TAN SUPER MATTE PER DESIGNER-APPROVED SAMPLE; DOUBLE RINCOMATIC PULL MATTE BLACK (SEE ID.5); TOE KICK LIGHT (SEE ID.17)
	BONUS ROOM	SHELVES			MILLWORK FINISH A: RIFT-CUT WHITE OAK WITH LIGHT STAIN	MILLWORK FINISH A: RIFT-CUT WHITE OAK WITH LIGHT STAIN PER DESIGNER APPROVED SAMPLE; 2" THICK WOOD SHELF WITH UNDER SHELF LIGHTING (SEE ID.13)
	BONUS ROOM	SLIDING DOOR			MILLWORK FINISH A: RIFT-CUT WHITE OAK WITH LIGHT STAIN	MILLWORK FINISH A: RIFT-CUT WHITE OAK WITH LIGHT STAIN PER DESIGNER APPROVED SAMPLE; WOOD SLAT SLIDING DOOR; HIDDEN TRACK IN LID
	THEATER	LOWER CABINET	MIRLUX	SUPER MATTE	MILLWORK FINISH B: MIRLUX TAN SUPER MATTE	MILLWORK FINISH B: MIRLUX TAN SUPER MATTE PER DESIGNER-APPROVED SAMPLE; INTEGRAL RINCOMATIC PULL MATTE BLACK (SEE ID.4); RECESSED TOE KICK
	THEATER	SHELVES			MILLWORK FINISH A: RIFT-CUT WHITE OAK WITH LIGHT STAIN	MILLWORK FINISH A: RIFT-CUT WHITE OAK WITH LIGHT STAIN PER DESIGNER-APPROVED SAMPLE; 2" THICK WOOD SHELF WITH LIGHTING AND PLUG MOLD (SEE ID.14)
	POWDER	SLAT WALL			MILLWORK FINISH A: RIFT-CUT WHITE OAK WITH LIGHT STAIN	MILLWORK FINISH A: RIFT-CUT WHITE OAK WITH LIGHT STAIN PER DESIGNER APPROVED SAMPLE; SLAT WALL
	POWDER	STORAGE	MIRLUX	SUPER MATTE	MILLWORK FINISH B: MIRLUX TAN SUPER MATTE	MILLWORK FINISH B: MIRLUX TAN SUPER MATTE PER DESIGNER-APPROVED SAMPLE; LINEAR FINGER PULL (SEE ID.6); TOE KICK LIGHTING (SEE ID.17)
	OFFICE	CONCEALED DOORS FOR CLOSET AND AV			MILLWORK FINISH A: RIFT-CUT WHITE OAK WITH LIGHT STAIN	MILLWORK FINISH A: RIFT-CUT WHITE OAK WITH LIGHT STAIN PER DESIGNER APPROVED SAMPLE; INTEGRAL RINCOMATIC PULL MATTE BLACK (SEE ID.4)
	MILLWORK	BATH 1	VANITY			MILLWORK FINISH A: RIFT-CUT WHITE OAK WITH LIGHT STAIN
W.I.C 1		CLOSET	PANOLAM SURFACE SYSTEMS		PANOLAM BLACK	PANOLAM BLACK PER DESIGNER APPROVED SAMPLE; ADJUSTABLE SHELVES; LONG HANG INTO CORNER; DOUBLE HANG; BLACK HANG RODS
BATH 2		VANITY			MILLWORK FINISH A: RIFT-CUT WHITE OAK WITH LIGHT STAIN	MILLWORK FINISH A: RIFT-CUT WHITE OAK WITH LIGHT STAIN PER DESIGNER APPROVED SAMPLE; LINEAR FINGER PULL (SEE ID.6); TOE KICK LIGHTING (SEE ID.17); TRASH P/O
W.I.C 2		CLOSET	PANOLAM SURFACE SYSTEMS		PANOLAM BLACK	PANOLAM BLACK PER DESIGNER APPROVED SAMPLE; ADJUSTABLE SHELVES; LONG HANG INTO CORNER; DOUBLE HANG; BLACK HANG RODS
BATH 3		VANITY			MILLWORK FINISH A: RIFT-CUT WHITE OAK WITH LIGHT STAIN	MILLWORK FINISH A: RIFT-CUT WHITE OAK WITH LIGHT STAIN PER DESIGNER APPROVED SAMPLE; LINEAR FINGER PULL (SEE ID.6); TOE KICK LIGHTING (SEE ID.17); TRASH P/O
W.I.C 3		CLOSET	PANOLAM SURFACE SYSTEMS		PANOLAM BLACK	PANOLAM BLACK PER DESIGNER APPROVED SAMPLE; ADJUSTABLE SHELVES; LONG HANG INTO CORNER; DOUBLE HANG; BLACK HANG RODS
MILLWORK	LAUNDRY	LOWER CABINETS	MIRLUX	SUPER MATTE	MILLWORK FINISH B: MIRLUX TAN SUPER MATTE	MILLWORK FINISH B: MIRLUX TAN SUPER MATTE PER DESIGNER-APPROVED SAMPLE; INTEGRAL RINCOMATIC PULL MATTE BLACK (SEE ID.4); RECESSED TOE KICK; 24" DEEP; TRASH P/O; DRAWER IN DRAWER; ROLL OUT UNDERNEATH SINK; DOUBLE HAMPER P/O
	LAUNDRY	TALL STORAGE	MIRLUX	SUPER MATTE	MILLWORK FINISH B: MIRLUX TAN SUPER MATTE	MILLWORK FINISH B: MIRLUX TAN SUPER MATTE PER DESIGNER-APPROVED SAMPLE; INTEGRAL RINCOMATIC PULL MATTE BLACK (SEE ID.4); RECESSED TOE KICK; 30" DEEP; HAND ROD BEHIND DOORS; ADJUSTABLE SHELVES; ROLL OUT UNDERNEATH SINK; SOAP P/O; FIXED PANELS ABOVE; ANGLED FIXED MILLWORK PANEL (SEE ELEV 116 - C)
	CASITA	LOWER CABINET	MIRLUX	SUPER MATTE	MILLWORK FINISH B: MIRLUX TAN SUPER MATTE	MILLWORK FINISH B: MIRLUX TAN SUPER MATTE PER DESIGNER-APPROVED SAMPLE; INTEGRAL RINCOMATIC PULL MATTE BLACK (SEE ID.4); RECESSED TOE KICK; 24" DEEP; TRASH P/O
	CASITA	TALL STORAGE	MIRLUX	SUPER MATTE	MILLWORK FINISH B: MIRLUX TAN SUPER MATTE	MILLWORK FINISH B: MIRLUX TAN SUPER MATTE PER DESIGNER-APPROVED SAMPLE; INTEGRAL RINCOMATIC PULL MATTE BLACK (SEE ID.4); RECESSED TOE KICK; 24" DEEP; FIXED PANEL ABOVE



MILLWORK	CASITA	FIXED PANEL ABOVE UPPER CABINET	MIRLUX	SUPER MATTE	MILLWORK FINISH B: MIRLUX TAN SUPER MATTE	MILLWORK FINISH B: MIRLUX TAN SUPER MATTE PER DESIGNER-APPROVED SAMPLE; 24" DEEP; UC LIGHTING (SEE ID.19)
	CASITA	UPPER CABINET			MILLWORK FINISH A: RIFT-CUT WHITE OAK WITH LIGHT STAIN	MILLWORK FINISH A: RIFT-CUT WHITE OAK WITH LIGHT STAIN PER DESIGNER APPROVED SAMPLE; UC LIGHTING WITH PLUG MOLD (SEE ID.18); SLAT DETAIL ON DOORS; 18" DEEP; INTEGRAL RINCOMATIC PULL MATTE BLACK (SEE ID.4)
	CASITA BATH	VANITY			MILLWORK FINISH A: RIFT-CUT WHITE OAK WITH LIGHT STAIN	MILLWORK FINISH A: RIFT-CUT WHITE OAK WITH LIGHT STAIN PER DESIGNER APPROVED SAMPLE; LINEAR FINGER PULL (SEE ID.6); TOE KICK LIGHTING (SEE ID.17)
	BBQ	PERIMETER CABINETS	BROWN JORDAN OUTDOOR KITCHENS	TITANIUM	MILLWORK FINISH E- OUTDOOR FINISH	W/ SURFACE MOUNT HARDWARE
	MASTER BED	PIVOTING MILLWORK PANELS			MILLWORK FINISH A: RIFT-CUT WHITE OAK WITH LIGHT STAIN	MILLWORK FINISH A: RIFT-CUT WHITE OAK WITH LIGHT STAIN PER DESIGNER APPROVED SAMPLE; PIVOTING MILLWORK PANELS TO ACT AS ROOM DIVIDER; PIVOT MECHANISM AT LID AND FLOOR
	MASTER BED	SLAT WALL BEHIND CABINET			MILLWORK FINISH A: RIFT-CUT WHITE OAK WITH LIGHT STAIN	MILLWORK FINISH A: RIFT-CUT WHITE OAK WITH LIGHT STAIN PER DESIGNER-APPROVED SAMPLE; SLAT WOOD PANEL
	MASTER BED	MILLWORK TOP	MIRLUX	SUPER MATTE	MILLWORK FINISH B: MIRLUX TAN SUPER MATTE	MILLWORK FINISH B: MIRLUX TAN SUPER MATTE PER DESIGNER-APPROVED SAMPLE; 2-1/2" EDGE MATCHING WOOD TOP (SEE ID.26); POWER STRIP AT BACK OF DRAWER FOR CHARGING STATION; TOEKICK LIGHTING, FULL LENGTH OF MILLWORK (SEE ID.17)
	MASTER BED	MILLWORK TOP			MILLWORK FINISH A: RIFT-CUT WHITE OAK WITH LIGHT STAIN	MILLWORK FINISH A: RIFT-CUT WHITE OAK WITH LIGHT STAIN PER DESIGNER-APPROVED SAMPLE; 2-1/2" EDGE MATCHING WOOD TOP; POWER STRIP AT BACK OF DRAWER FOR CHARGING STATION; TOEKICK LIGHTING, FULL LENGTH OF MILLWORK (SEE ID.17)
	MASTER BED	CABINET			MILLWORK FINISH A: RIFT-CUT WHITE OAK WITH LIGHT STAIN	MILLWORK FINISH A: RIFT-CUT WHITE OAK WITH LIGHT STAIN PER DESIGNER-APPROVED SAMPLE; POWER STRIP AT BACK OF DRAWER FOR CHARGING STATION; TOEKICK LIGHTING (SEE ID.17); LINEAR FINGER PULL (SEE ID.6)
	MASTER BED	TV SLAT WALL			MILLWORK FINISH A: RIFT-CUT WHITE OAK WITH LIGHT STAIN	MILLWORK FINISH A: RIFT-CUT WHITE OAK WITH LIGHT STAIN PER DESIGNER-APPROVED SAMPLE; SLAT WOOD PANEL TO RUN ON ALL FOUR SIDES
	MASTER BATH	VANITY			MILLWORK FINISH A: RIFT-CUT WHITE OAK WITH LIGHT STAIN	MILLWORK FINISH A: RIFT-CUT WHITE OAK WITH LIGHT STAIN PER DESIGNER APPROVED SAMPLE; LINEAR FINGER PULL (SEE ID.6); TOE KICK LIGHTING (SEE ID.17)
	MASTER BATH	TALL STORAGE/LINEN			MILLWORK FINISH A: RIFT-CUT WHITE OAK WITH LIGHT STAIN	MILLWORK FINISH A: RIFT-CUT WHITE OAK WITH LIGHT STAIN PER DESIGNER APPROVED SAMPLE; LINEAR FINGER PULL (SEE ID.6); TOE KICK LIGHTING (SEE ID.17); TRASH P/O; HAIR ACCESSORIES P/O; PLUG INSIDE; ADJUSTABLE SHELVES BEHIND DOORS
	MASTER BATH (WC 2)	TALL STORAGE/LINEN			MILLWORK FINISH A: RIFT-CUT WHITE OAK WITH LIGHT STAIN	MILLWORK FINISH A: RIFT-CUT WHITE OAK WITH LIGHT STAIN PER DESIGNER-APPROVED SAMPLE; DOUBLE LINEAR FINGER PULL (SEE ID.5); TOE KICK LIGHTING (SEE ID.17); PLUG INSIDE; ADJUSTABLE SHELVES BEHIND DOORS
	MASTER W.I.C	CLOSETS			PANOLAM BLACK (TO BE UPGRADED BY DESIGNER)	
	VIEWING LOFT	LOWER CABINETS	MIRLUX	SUPER MATTE	MILLWORK FINISH B: MIRLUX TAN SUPER MATTE	MILLWORK FINISH B: MIRLUX TAN SUPER MATTE PER DESIGNER-APPROVED SAMPLE; INTEGRAL RINCOMATIC PULL MATTE BLACK (SEE ID.4); RECESSED TOE KICK
	VIEWING LOFT	LOWER CABINETS (REF DRAWERS PANEL)	MIRLUX	SUPER MATTE	MILLWORK FINISH B: MIRLUX TAN SUPER MATTE	MILLWORK FINISH B: MIRLUX TAN SUPER MATTE PER DESIGNER-APPROVED SAMPLE; INTEGRAL RINCOMATIC PULL MATTE BLACK (SEE ID.4); RECESSED TOE KICK; EXTENDED PANELS FOR DRAWER FACE
	VIEWING LOFT	UPPER CABINET			MILLWORK FINISH A: RIFT-CUT WHITE OAK WITH LIGHT STAIN	MILLWORK FINISH A: RIFT-CUT WHITE OAK WITH LIGHT STAIN PER DESIGNER APPROVED SAMPLE; UC LIGHTING WITH PLUG MOLD (SEE ID.18); SLAT DETAIL ON DOORS; 17" DEEP; INTEGRAL RINCOMATIC PULL MATTE BLACK (SEE ID.4)
	VIEWING LOFT	PIVOTING MILLWORK PANELS			MILLWORK FINISH A: RIFT-CUT WHITE OAK WITH LIGHT STAIN	MILLWORK FINISH A: RIFT-CUT WHITE OAK WITH LIGHT STAIN PER DESIGNER APPROVED SAMPLE; PIVOTING MILLWORK PANELS TO ACT AS ROOM DIVIDER; PIVOT MECHANISM AT LID AND FLOOR
	VIEWING LOFT	SLAT WALL			MILLWORK FINISH A: RIFT-CUT WHITE OAK WITH LIGHT STAIN	MILLWORK FINISH A: RIFT-CUT WHITE OAK WITH LIGHT STAIN PER DESIGNER-APPROVED SAMPLE; SLAT WOOD PANEL
VIEWING LOFT	DISPLAY SHELVES			BLACK STAINED RIFT OAK	BLACK STAINED RIFT OAK PER DESIGNER-APPROVED SAMPLE; UNDER SHELF LIGHTING (ID.13) LOCATIONS PROVIDED BY DESIGNER	



	LOCATION	ITEMS	ELEVATION #	MANUFACTURER	COLLECTION	PRODUCT DETAILS		
P A I N T & D R Y W A L L	THROUGHOUT	DRYWALL				LEVEL 5		
	INTERIOR WALLS THROUGHOUT	INTERIOR PAINT		DUNN EDWARDS	DEW380 - DROPLETS	EGGSHELL FINISH		
	CEILINGS THROUGHOUT	INTERIOR PAINT		DUNN EDWARDS	DEW380 - DROPLETS	FLAT FINISH		
	THROUGHOUT	BASE DETAIL AT DRYWALL		DUNN EDWARDS	DEW380 - DROPLETS	3/4" FRY REGLET ABOVE FINISH FLOOR PAINTED TO MATCH THE WALL		
	LOCATION	ITEM	MODEL #	MANUFACTURER	COLLECTION	FINISH	QUANTITY	PRODUCT DESCRIPTION
P L U M B I N G	KITCHEN	FAUCET	63220LF-BL	BRIZO	SOLNA	MATTE BLACK	1	SINGLE HANDLE PULL-OUT KITCHEN FAUCET
	KITCHEN	SOAP DISPENSER	RP79275BL	BRIZO	SOLNA	MATTE BLACK	1	SOAP DISPENSER
	KITCHEN	AIR SWITCH	9610-K50-MBLK	CALIFORNIA FAUCETS	POETTO SERIES	MATTE BLACK	1	AIR ACTIVATION SWITCH FOR DISPOSER
	KITCHEN	SINK	TBD	BLANCO	PRECIS	TBD BASED ON COUNTERTOP SLAB SELECTION	1	PRECIS SUPER SINGLE UNDERMOUNT SINK
	KITCHEN	GARBAGE DISPOSAL		INSINKERATOR			1	BADGET 5 GARBAGE DISPOSAL
	BAR	FAUCET	63220LF-BL	BRIZO	SOLNA	MATTE BLACK	1	SINGLE HANDLE PULL-OUT KITCHEN FAUCET
	BAR	SOAP DISPENSER	RP79275BL	BRIZO	SOLNA	MATTE BLACK	1	SOAP DISPENSER
	BAR	HOT AND COLD FAUCET	45396Y-ISE	INSINKERATOR	SHOWROOM COLLECTION	MATTE BLACK	1	SHOWROOM COLLECTION MODERN 3020 INSTANT HOT AND COLD FAUCET
	BAR	GARBAGE DISPOSAL		INSINKERATOR			1	BADGET 5 GARBAGE DISPOSAL
	BAR	AIR SWITCH	9610-K50-MBLK	CALIFORNIA FAUCETS	POETTO SERIES	MATTE BLACK	1	AIR ACTIVATION SWITCH FOR DISPOSER
	BAR	SINK	TBD	BLANCO	PRECIS	TBD BASED ON COUNTERTOP SLAB SELECTION	1	24" PRECIS UNDERMOUNT SINK
	LAUNDRY	FAUCET	63220LF-BL	BRIZO	SOLNA	MATTE BLACK	1	SINGLE HANDLE PULL-OUT KITCHEN FAUCET
	LAUNDRY	SOAP DISPENSER	RP79275BL	BRIZO	SOLNA	MATTE BLACK	1	SOAP DISPENSER
	LAUNDRY	SINK	TBD	BLANCO	PRECIS	TBD BASED ON COUNTERTOP SLAB SELECTION	1	30" PRECIS UNDERMOUNT SINK
POWDER	FAUCET	65880LF-BLLHP-ECO HL5880-BL	BRIZO	SIDERNA®	MATTE BLACK	1	TWO-HANDLE WALL MOUNT LAVATORY FAUCET - LESS HANDLES 1.2 GPM	
POWDER	SINK					1	CUSTOM INTEGRAL SINK WITH HIDDEN LINEAR DRAIN	
POWDER	TOILET	MS988CUMFG#01	TOTO	NEOREST®	#01 COTTON	1	NEOREST® RH DUAL FLUSH TOILET - 1.0 GPF & 0.8 GPF	
POWDER	TOWEL RING	694680-BL	BRIZO	SIDERNA®	MATTE BLACK	1	TOWEL RING	
POWDER	TISSUE HOLDER	695080-BL	BRIZO	SIDERNA®	MATTE BLACK	1	TISSUE HOLDER	

P L U M B I N G	MASTER BATH	RAIN SHOWER	81399-BL-2.5 RP70765BL	BRIZO	ESSENTIAL	MATTE BLACK	1	12" LINEAR SQUARE SINGLE-FUNCTION RAIN CAN SHOWER HEAD - 2.5 GPM W/ 10" CEILING MOUNT SHOWER ARM & SQUARE FLANGE
	MASTER BATH	TUB FILLER	T70180-BL R70100	BRIZO	SIDERNA®	MATTE BLACK	1	SINGLE-HANDLE FREESTANDING TUB FILLER
	MASTER BATH	THERM CONTROL	T75680-BL	BRIZO	SIDERNA®	MATTE BLACK	1	TEMPASSURE THERMOSTATIC VALVE WITH INTEGRATED 6-FUNCTION DIVERTER TRIM
	MASTER BATH	SHOWER HEAD	87492-BL-1.5 RP74448BL	BRIZO	SIDERNA®	MATTE BLACK	2	7" LINEAR ROUND H2OKINETIC® MULTI-FUNCTION WALL MOUNT SHOWER HEAD - 1.5 GPM W/ 7" LINEAR SQUARE WALL MOUNT SHOWER ARM AND FLANGE
	MASTER BATH	HANDSHOWER	85780-BL	BRIZO	SIDERNA®	MATTE BLACK	1	SINGLE-FUNCTION SLIDE BAR HAND SHOWER
	MASTER BATH	FAUCET	65880LF-BLLHP-ECO HL5880-BL	BRIZO	SIDERNA®	MATTE BLACK	2	TWO-HANDLE WALL MOUNT LAVATORY FAUCET - LESS HANDLES 1.2 GPM
	MASTER BATH	TOWEL RING	694680-BL	BRIZO	SIDERNA®	MATTE BLACK	2	TOWEL RING
	MASTER BATH	TISSUE HOLDER	695080-BL	BRIZO	SIDERNA®	MATTE BLACK	2	TISSUE HOLDER
	MASTER BATH	ROBE HOOKS	693580-BL	BRIZO	SIDERNA®	MATTE BLACK	2 SETS	DOUBLE ROBE HOOK
	MASTER BATH	TOILET	MS988CUMFG#01	TOTO	NEOREST®	#01 COTTON	2	NEOREST® RH DUAL FLUSH TOILET - 1.0 GPF & 0.8 GPF
	MASTER BATH	SINK					2	CUSTOM INTEGRAL SINK WITH HIDDEN LINEAR DRAIN
	MASTER BATH	INFINITY DRAIN				POLISHED CHROME	1	INFINITY DRAIN CUSTOM FIT WALL-TO-WALL TILE-IN
	P L U M B I N G	MASTER BATH	TUB	VE2M-N-SM-NO	VICTORIA AND ALBERT	VETRELLA 2	MATTE BLACK	1
MASTER BATH		DECO P-TRAP	K-9033-BL	KOHLER		MATTE BLACK	2	BOTTLE TRAP, 1-1/4" X 1-1/4"
BATH 1		THERM CONTROL	T75680-BL	BRIZO	SIDERNA®	MATTE BLACK	1	TEMPASSURE THERMOSTATIC VALVE WITH INTEGRATED 6-FUNCTION DIVERTER TRIM
BATH 1		SHOWER HEAD	87492-BL-1.5 RP74448BL	BRIZO	SIDERNA®	MATTE BLACK	1	7" LINEAR ROUND H2OKINETIC® MULTI-FUNCTION WALL MOUNT SHOWER HEAD - 1.5 GPM W/ 7" LINEAR SQUARE WALL MOUNT SHOWER ARM AND FLANGE
BATH 1		HANDSHOWER	85780-BL	BRIZO	SIDERNA®	MATTE BLACK	1	SINGLE-FUNCTION SLIDE BAR HAND SHOWER
BATH 1		FAUCET	65380LF-BLLHP HL5380-BL	BRIZO	SIDERNA®	MATTE BLACK	1	WIDESPREAD LAVATORY FAUCET - LESS HANDLES 1.5 GPM
BATH 1		TOWEL RING	694680-BL	BRIZO	SIDERNA®	MATTE BLACK	1	TOWEL RING
BATH 1		TISSUE HOLDER	695080-BL	BRIZO	SIDERNA®	MATTE BLACK	1	TISSUE HOLDER
BATH 1		ROBE HOOKS	693580-BL	BRIZO	SIDERNA®	MATTE BLACK	1 SET	DOUBLE ROBE HOOK
BATH 1		TOILET	MS624124CEFG#01	TOTO	LEGATO™	#01 COTTON	1	LEGATO™ ONE-PIECE TOILET, 1.28GPF, ELONGATED BOWL - WASHLET®+ CONNECTION
BATH 1		SINK	LT191G	TOTO		WHITE	1	20 1/2" x 12-3/8" UNDERMOUNT BATHROOM SINK
BATH 1		INFINITY DRAIN				POLISHED CHROME	1	INFINITY DRAIN CUSTOM FIT WALL-TO-WALL TILE-IN
BATH 2		THERM CONTROL	T75680-BL	BRIZO	SIDERNA®	MATTE BLACK	1	TEMPASSURE THERMOSTATIC VALVE WITH INTEGRATED 6-FUNCTION DIVERTER TRIM
BATH 2		SHOWER HEAD	87492-BL-1.5 RP74448BL	BRIZO	SIDERNA®	MATTE BLACK	1	7" LINEAR ROUND H2OKINETIC® MULTI-FUNCTION WALL MOUNT SHOWER HEAD - 1.5 GPM W/ 7" LINEAR SQUARE WALL MOUNT SHOWER ARM AND FLANGE
BATH 2		HANDSHOWER	85780-BL	BRIZO	SIDERNA®	MATTE BLACK	1	SINGLE-FUNCTION SLIDE BAR HAND SHOWER
BATH 2		FAUCET	65380LF-BLLHP HL5380-BL	BRIZO	SIDERNA®	MATTE BLACK	1	WIDESPREAD LAVATORY FAUCET - LESS HANDLES 1.5 GPM
BATH 2		TOWEL RING	694680-BL	BRIZO	SIDERNA®	MATTE BLACK	1	TOWEL RING



P L U M B I N G	BATH 2	TISSUE HOLDER	695080-BL	BRIZO	SIDERNA®	MATTE BLACK	1	TISSUE HOLDER
	BATH 2	ROBE HOOKS	693580-BL	BRIZO	SIDERNA®	MATTE BLACK	1 SET	DOUBLE ROBE HOOK
	BATH 2	TOILET	MS624124CEFG#01	TOTO	LEGATO™	#01 COTTON	1	LEGATO™ ONE-PIECE TOILET, 1.28GPF, ELONGATED BOWL - WASHLET®+ CONNECTION
	BATH 2	SINK	LT191G	TOTO		WHITE	1	20 1/2" x 12-3/8" UNDERMOUNT BATHROOM SINK
	BATH 2	INFINITY DRAIN				POLISHED CHROME	1	INFINITY DRAIN CUSTOM FIT WALL-TO-WALL TILE-IN
	BATH 3	THERM CONTROL	T75680-BL	BRIZO	SIDERNA®	MATTE BLACK	1	TEMPASSURE THERMOSTATIC VALVE WITH INTEGRATED 6-FUNCTION DIVERTER TRIM
	BATH 3	SHOWER HEAD	87492-BL-1.5 RP74448BL	BRIZO	SIDERNA®	MATTE BLACK	1	7" LINEAR ROUND H2OKINETIC® MULTI-FUNCTION WALL MOUNT SHOWER HEAD - 1.5 GPM W/ 7" LINEAR SQUARE WALL MOUNT SHOWER ARM AND FLANGE
	BATH 3	HANDSHOWER	85780-BL	BRIZO	SIDERNA®	MATTE BLACK	1	SINGLE-FUNCTION SLIDE BAR HAND SHOWER
	BATH 3	FAUCET	65380LF-BLLHP HL5380-BL	BRIZO	SIDERNA®	MATTE BLACK	1	WIDESPREAD LAVATORY FAUCET - LESS HANDLES 1.5 GPM
	BATH 3	TOWEL RING	694680-BL	BRIZO	SIDERNA®	MATTE BLACK	1	TOWEL RING
P L U M B I N G	BATH 3	TISSUE HOLDER	695080-BL	BRIZO	SIDERNA®	MATTE BLACK	1	TISSUE HOLDER
	BATH 3	ROBE HOOKS	693580-BL	BRIZO	SIDERNA®	MATTE BLACK	1 SET	DOUBLE ROBE HOOK
	BATH 3	TOILET	MS624124CEFG#01	TOTO	LEGATO™	#01 COTTON	1	LEGATO™ ONE-PIECE TOILET, 1.28GPF, ELONGATED BOWL - WASHLET®+ CONNECTION
	BATH 3	SINK	LT191G	TOTO		WHITE	1	20 1/2" x 12-3/8" UNDERMOUNT BATHROOM SINK
	BATH 3	INFINITY DRAIN				POLISHED CHROME	1	INFINITY DRAIN CUSTOM FIT WALL-TO-WALL TILE-IN
	CASITA BATH	THERM CONTROL	T75680-BL	BRIZO	SIDERNA®	MATTE BLACK	1	TEMPASSURE THERMOSTATIC VALVE WITH INTEGRATED 6-FUNCTION DIVERTER TRIM
	CASITA BATH	SHOWER HEAD	87492-BL-1.5 RP74448BL	BRIZO	SIDERNA®	MATTE BLACK	1	7" LINEAR ROUND H2OKINETIC® MULTI-FUNCTION WALL MOUNT SHOWER HEAD - 1.5 GPM W/ 7" LINEAR SQUARE WALL MOUNT SHOWER ARM AND FLANGE
	CASITA BATH	HANDSHOWER	85780-BL	BRIZO	SIDERNA®	MATTE BLACK	1	SINGLE-FUNCTION SLIDE BAR HAND SHOWER
	CASITA BATH	FAUCET	65380LF-BLLHP HL5380-BL	BRIZO	SIDERNA®	MATTE BLACK	1	WIDESPREAD LAVATORY FAUCET - LESS HANDLES 1.5 GPM
	CASITA BATH	TOWEL RING	694680-BL	BRIZO	SIDERNA®	MATTE BLACK	1	TOWEL RING
P L U M B I N G	CASITA BATH	TISSUE HOLDER	695080-BL	BRIZO	SIDERNA®	MATTE BLACK	1	TISSUE HOLDER
	CASITA BATH	ROBE HOOKS	693580-BL	BRIZO	SIDERNA®	MATTE BLACK	1 SET	DOUBLE ROBE HOOK
	CASITA BATH	TOILET	MS624124CEFG#01	TOTO	LEGATO™	#01 COTTON	1	LEGATO™ ONE-PIECE TOILET, 1.28GPF, ELONGATED BOWL - WASHLET®+ CONNECTION
	CASITA BATH	SINK	LT191G	TOTO		WHITE	1	20 1/2" x 12-3/8" UNDERMOUNT BATHROOM SINK
	CASITA BATH	INFINITY DRAIN				POLISHED CHROME	1	INFINITY DRAIN CUSTOM FIT WALL-TO-WALL TILE-IN
	VIEW LOFT	FAUCET	63220LF-BL	BRIZO	SOLNA	MATTE BLACK	1	SINGLE HANDLE PULL-OUT KITCHEN FAUCET
	VIEW LOFT	SOAP DISPENSER	RP79275BL	BRIZO	SOLNA	MATTE BLACK	1	SOAP DISPENSER
	VIEW LOFT	SINK	TBD	BLANCO	PRECIS	TBD BASED ON COUNTERTOP SLAB SELECTION	1	24" PRECIS UNDERMOUNT SINK
	OUTDOOR BBQ	FAUCET	63075LF-PCLHP HLK175-PC	BRIZO	ODIN	POLISHED CHROME	1	PULL-DOWN FAUCET WITH ARC SPOUT - LESS HANDLE
	OUTDOOR BBQ	SINK	K-5286-NA	KOHLER	STRIVE®	STAINLESS STEEL	1	KOHLER STRIVE 24" X 18-1/4" X 9-5/16" UNDERMOUNT SINGLE-BOWL KITCHEN SINK WITH RACK

	LOCATION	ITEM	VENDOR	MANUFACTURER	COLLECTION	FINISH	TILE SIZE	GROUT
P O O L F I N I S H E S		WATERLINE TILE	DALTILE		PORTFOLIO	IRON GREY PF06	6 X 24	
		POOL FINISH		PEBBLE PLUS				
		COPING						

	LOCATION	ITEM	TYPE	MANUFACTURER	COLLECTION	FINISH	EDGE DETAIL	PRODUCT DETAILS
--	----------	------	------	--------------	------------	--------	-------------	-----------------

**\*SLABS NOT FINAL - FOR PRICING PURPOSES ONLY\***

**\*SLABS NOT FINAL - FOR PRICING PURPOSES ONLY\***

S L A B	KITCHEN	COOKTOP	QUARTZITE	GALLERIA OF STONE		CALACATTA BRASIL	2 1/2" SQUARE MITERED EASED EDGE	2 1/2" SLAB COUNTERTOP WITH SQ. MITERED EDGE AND FULL SPLASH WITH 1/2" WOOD REVEAL; SLAB EDGE FLUSH WITH MILLWORK DOOR/DRAWER FACE
	KITCHEN	ISLAND	QUARTZITE	GALLERIA OF STONE		CALACATTA BRASIL	2 1/2" SQUARE MITERED EASED EDGE	2 1/2" SLAB COUNTERTOP WITH SQ. MITERED EDGE WITH 1/2" WOOD REVEAL; SLAB EDGE FLUSH WITH MILLWORK DOOR/DRAWER FACE; PLUG MOLD UNDERNEATH
	PANTRY	COUNTERTOP & BACKSPLASH	QUARTZITE	GALLERIA OF STONE		CALACATTA BRASIL	2 1/2" SQUARE MITERED EASED EDGE	2 1/2" SLAB COUNTERTOP WITH SQUARE MITERED EDGE AND FULL SPLASH; SLAB EDGE FLUSH WITH MILLWORK DOOR/DRAWER FACE
	KEY DROP	COUNTERTOP	QUARTZ	CAESARSTONE	SUPERNATURAL COLLECTION	PIATRA GREY	2 1/2" SQUARE MITERED EASED EDGE	2 1/2" SLAB COUNTERTOP WITH SQUARE MITERED EDGE; SLAB EDGE FLUSH WITH MILLWORK DOOR/DRAWER FACE
	BAR	COUNTERTOP & BACKSPLASH	QUARTZITE	GALLERIA OF STONE		CALACATTA BRASIL	2 1/2" SQUARE MITERED EASED EDGE	2 1/2" SLAB COUNTERTOP WITH SQ. MITERED EDGE AND FULL SPLASH WITH 1/2" WOOD REVEAL; SLAB EDGE FLUSH WITH MILLWORK DOOR/DRAWER FACE
	BAR	WATERFALL COUNTERTOP	QUARTZITE	GALLERIA OF STONE		CALACATTA BRASIL	2 1/2" SQUARE MITERED EASED WATERFALL EDGE	2 1/2" SQUARE MITERED SLAB COUNTERTOP WITH WATERFALL SIDE; SLAB EDGE FLUSH WITH MILLWORK DOOR/DRAWER FACE
	GREAT ROOM FIREPLACE	SLAB HEARTH	GRANITE	CACTUS STONE		DEEP WAVE	SQUARE MITERED EASED EDGE	18" TALL SLAB HEARTH; 27" PROUD FROM WALL; SEE ELEV 105 - B
	THEATER	COUNTERTOP	QUARTZ	CAESARSTONE	SUPERNATURAL COLLECTION	PIATRA GREY	2 1/2" SQUARE MITERED EASED EDGE	2 1/2" SLAB COUNTERTOP WITH SQUARE MITERED EDGE; SLAB EDGE FLUSH WITH MILLWORK DOOR/DRAWER FACE
	POWDER	VANITY	QUARTZITE	GALLERIA OF STONE		CALACATTA BRASIL	8" SQUARE MITERED EASED EDGE	8" SLAB COUNTERTOP WITH SQUARE MITERED EDGE AND INTEGRAL SINK (SEE ID.7)
	BATH 1	VANITY	QUARTZ	CAESARSTONE	SUPERNATURAL COLLECTION	PIATRA GREY	4" SQUARE MITERED EASED EDGE	4" SQUARE MITERED SLAB COUNTERTOP; SLAB EDGE FLUSH WITH MILLWORK DOOR/DRAWER FACE
S L A B	BATH 1	SHOWER BENCH	QUARTZ	CAESARSTONE	SUPERNATURAL COLLECTION	PIATRA GREY	4" SQUARE MITERED EASED EDGE	4" SQUARE MITERED SLAB BENCH WITH TOE KICK LIGHTING (SEE ID.8)
	BATH 2	VANITY	QUARTZ	CAESARSTONE	SUPERNATURAL COLLECTION	PIATRA GREY	4" SQUARE MITERED EASED EDGE	4" SQUARE MITERED SLAB COUNTERTOP; SLAB EDGE FLUSH WITH MILLWORK DOOR/DRAWER FACE
	BATH 2	SHOWER BENCH	QUARTZ	CAESARSTONE	SUPERNATURAL COLLECTION	PIATRA GREY	4" SQUARE MITERED EASED EDGE	4" SQUARE MITERED SLAB BENCH WITH TOE KICK LIGHTING (SEE ID.8)
	BATH 3	VANITY	QUARTZ	CAESARSTONE	SUPERNATURAL COLLECTION	PIATRA GREY	4" SQUARE MITERED EASED EDGE	4" SQUARE MITERED SLAB COUNTERTOP; SLAB EDGE FLUSH WITH MILLWORK DOOR/DRAWER FACE
S L A B	BATH 3	SHOWER BENCH	QUARTZ	CAESARSTONE	SUPERNATURAL COLLECTION	PIATRA GREY	4" SQUARE MITERED EASED EDGE	4" SQUARE MITERED SLAB BENCH WITH TOE KICK LIGHTING (SEE ID.8)
	LAUNDRY	COUNTERTOP	QUARTZITE	GALLERIA OF STONE		CALACATTA BRASIL	2 1/2" SQUARE MITERED EASED EDGE	2 1/2" SLAB COUNTERTOP WITH SQUARE MITERED EDGE; SLAB EDGE FLUSH WITH MILLWORK DOOR/DRAWER FACE
	CASITA	COUNTERTOP	QUARTZ	CAESARSTONE	SUPERNATURAL COLLECTION	PIATRA GREY	2 1/2" SQUARE MITERED EASED EDGE	2 1/2" SLAB COUNTERTOP WITH SQUARE MITERED EDGE AND FULL SPLASH; SLAB EDGE FLUSH WITH MILLWORK DOOR/DRAWER FACE
CASITA BATH	VANITY	QUARTZ	CAESARSTONE	SUPERNATURAL COLLECTION	PIATRA GREY	4" SQUARE MITERED EASED EDGE	4" SQUARE MITERED SLAB COUNTERTOP; SLAB EDGE FLUSH WITH MILLWORK DOOR/DRAWER FACE	



S L A B	CASITA BATH	SHOWER BENCH	QUARTZ	CAESARSTONE	SUPERNATURAL COLLECTION	PIATRA GREY	4" SQUARE MITERED EASED EDGE	4" SQUARE MITERED SLAB BENCH WITH TOE KICK LIGHTING (SEE ID.8)
	BBQ	COUNTERTOP	GRANITE	CACTUS STONE		DEEP WAVE	3" SQUARE MITERED EASED EDGE	4" SQUARE MITERED SLAB COUNTERTOP; SLAB EDGE FLUSH WITH MILLWORK DOOR/DRAWER FACE
	MASTER BATH	VANITY	QUARTZITE	GALLERIA OF STONE		CALACATTA BRASIL	6" SQUARE MITERED EASED EDGE	6" SQUARE MITERED EDGE FLOATING COUNTERTOP
	MASTER BATH	SHOWER BENCH	QUARTZITE	GALLERIA OF STONE		CALACATTA BRASIL		FULL SLAB BENCH (SEE ELEV 202 B, C)
	MASTER BATH	SLAB WALL AT VANITY	QUARTZITE	GALLERIA OF STONE		CALACATTA BRASIL		FULL SLAB FROM COUNTERTOP TO LID (SEE ELE 202 A; B)
	MASTER BATH	SLAB WALL IN SHOWER	QUARTZITE	GALLERIA OF STONE		CALACATTA BRASIL		SLAB WALL PROUD 2" FROM TILE
	MASTER BATH	SLAB NICHE	QUARTZITE	GALLERIA OF STONE		CALACATTA BRASIL		RECESSED IN SLAB SHOWER NICHES WITH LIGHTING (SEE ID.28) WITH SLAB SHELF (SEE ELEV 202 - B; C)
	MASTER BATH	MAKE UP VANITY	QUARTZITE	GALLERIA OF STONE		CALACATTA BRASIL	6" SQUARE MITERED EASED EDGE	6" SQUARE MITERED EDGE FLOATING COUNTERTOP; PLUG UNDERNEATH
	MASTER BATH	SLAB WALL AT MAKE UP VANITY	QUARTZITE	GALLERIA OF STONE		CALACATTA BRASIL		FULL SLAB FROM COUNTERTOP TO LID (SEE ELEV 202 - B)
	MASTER W.I.C	COUNTERTOP	QUARTZITE	GALLERIA OF STONE		CALACATTA BRASIL	2 1/2" SQUARE MITERED EASED EDGE	2 1/2" SLAB COUNTERTOP WITH SQUARE MITERED EDGE; SLAB EDGE FLUSH WITH MILLWORK DOOR/DRAWER FACE
	MASTER W.I.C	COUNTERTOP ISLAND	QUARTZITE	GALLERIA OF STONE		CALACATTA BRASIL	2 1/2" SQUARE MITERED EASED EDGE	2 1/2" SLAB COUNTERTOP WITH SQUARE MITERED EDGE; SLAB EDGE FLUSH WITH MILLWORK DOOR/DRAWER FACE
	VIEWING LOFT	COUNTERTOP & BACKSPLASH	QUARTZITE	GALLERIA OF STONE		CALACATTA BRASIL	2 1/2" SQUARE MITERED EASED EDGE	2 1/2" SLAB COUNTERTOP WITH SQ. MITERED EDGE AND FULL SPLASH WITH 1/2" WOOD REVEAL; SLAB EDGE FLUSH WITH MILLWORK DOOR/DRAWER FACE
VIEWING LOFT	WATERFALL COUNTERTOP	QUARTZITE	GALLERIA OF STONE		CALACATTA BRASIL	2 1/2" SQUARE MITERED EASED WATERFALL EDGE	2 1/2" SQUARE MITERED SLAB COUNTERTOP WITH WATERFALL SIDE; SLAB EDGE FLUSH WITH MILLWORK DOOR/DRAWER FACE	
LOCATION		ITEM	ELEVATION #	VENDOR	MANUFACTURER	FINISH	SIZE	PRODUCT DETAILS
M E T A L	BAR	METAL SHELVES	104 - A, B, C			BLACK METAL		1.5" THICK METAL SHELVING WITH LINEAR LIGHTING ABOVE AND BELOW (SEE ID.22) SEE ELEVATIONS
	BAR	METAL SLATS	104 - A			BLACKENED METAL		1.5" THICK METAL SLATS TO MATCH SHELVING BELOW SEE ELEVATIONS
	GREAT ROOM	FIREPLACE SURROUND	105 - A			BLACKENED METAL		BLACK METAL PER DESIGNER APPROVED SAMPLE; BLACK METAL FIREBOX ON BACK AND SIDES
	GREAT ROOM	BLACKENED METAL SLATTED REVEALS	105 - A			BLACKENED METAL		BLACKENED METAL SLATTED REVEALS; 20" PROUD OF WALL
	BBQ	METAL HOOD	119 - A			BLACKENED METAL		BLACKENED METAL HOOD; METAL EDGE DETAIL
LOCATION		ITEM	ELEVATION #	VENDOR	MANUFACTURER	FINISH	SIZE	PRODUCT DETAILS
S P E C I A L T Y	KEY DROP	WALLPAPER	103 - A		TBD	TBD		TBD
	BONUS ROOM	WALLPAPER	106 - A		TBD	TBD		TBD
	THEATER	ACCOUSTICAL PANELS	107 - A, B, C,D		TBD	TBD		ACOUSTICAL PANELS WITH 1/2" REVEALS
	THEATER	MOTORIZED BLACK OUT SHADES	107 - D		TBD	TBD		TBD
	POWDER	WALLPAPER	108 - C, D		TBD	TBD		TBD
	MASTER BEDROOM	WALLPAPER	201 - B		TBD	TBD		TBD

	LOCATION	ITEM	MANUFACTURER	MODEL #	FINISH	SIZE	PRODUCT DETAILS
T R I M & M O U L D I N G	THROUGHOUT	BASEBOARD	FRYE REGLET		PAINT - DEW380 DROPLETS	3/4" TALL	PAINTED (TO MATCH INTERIOR WALL COLOR)

	LOCATION	ITEM	VENDOR	MANUFACTURER	COLLECTION	FINISH	TILE SIZE	GROUT	
T I L E - W A L L S	BATH 1	SEE INTERIOR ELEVATIONS	FACINGS OF AMERICA	ERGON	ELEGANCE PRO	GREY NATURALE	24 X 48	TBD	PORCELAIN
	BATH 2	SEE INTERIOR ELEVATIONS	FACINGS OF AMERICA	ERGON	ELEGANCE PRO	GREY NATURALE	24 X 48	TBD	PORCELAIN
	BATH 3	SEE INTERIOR ELEVATIONS	FACINGS OF AMERICA	ERGON	ELEGANCE PRO	GREY NATURALE	24 X 48	TBD	PORCELAIN
	LAUNDRY	SEE INTERIOR ELEVATIONS	TBD	TBD	TBD	TBD	2 X 16	TBD	PORCELAIN
	CASITA BATH	SEE INTERIOR ELEVATIONS	FACINGS OF AMERICA	ERGON	ELEGANCE PRO	GREY NATURALE	24 X 48	TBD	PORCELAIN
	MASTER BATH SHOWER	SEE INTERIOR ELEVATIONS	FACINGS OF AMERICA	ERGON	ELEGANCE PRO	GREY MURAL	24 X 48	TBD	PORCELAIN
	MASTER BATH (WC 1)	SEE INTERIOR ELEVATIONS	FACINGS OF AMERICA	ERGON	ELEGANCE PRO	GREY NATURALE	24 X 48	TBD	PORCELAIN; MITERED TILE EDGE
	MASTER BATH (WC 2)	SEE INTERIOR ELEVATIONS	FACINGS OF AMERICA	ERGON	ELEGANCE PRO	GREY NATURALE	24 X 48	TBD	PORCELAIN; MITERED TILE EDGE
	HOUSE STONE	SEE INTERIOR ELEVATIONS	SOLSTICE STONE			PACIFIC BLUE SPLITFACE	4" x RANDOM LENGTHS		LIMESTONE -
	ACCENT HOUSE STONE	SEE INTERIOR ELEVATIONS	SOLSTICE STONE			PACIFIC BLUE COMBED			

NOTES: ALL DIMENSIONS ARE ESTIMATES AND SHOULD BE CONFIRMED BY THE BUILDER  
PLEASE REFER TO ELEVATIONS IN ADDITION TO THESE NOTES

